

STRAIGHT-FLEX[®]

wide-flex[®] 400

**LAMINATED COMPOSITE
CORNER TAPE**

**Highly recommended
for hard-to-straighten
vaulted ceilings.**

Product Description

- Memory-free hinge design allows for ease of installation, straight corners and perfect angles.
- Diamond-punched 94 lb. paper edging allows for easier feathering, faster drying, and the highest bonding strength. Also guarantees an even lay-down of the paper, providing maximum adhesion with no rippling or blistering.
- PUR-laminated nose ensures perfect corners without paper fuzz-up during finishing and sanding.
- Prefinished surface. Just skim coat edges to finish.
- Rustproof.
- Cuts easily with knife or scissors.
- Straightens large framing irregularities.
- No cracks. No callbacks.


Applications

- Hard-to-straighten vaults.
- Butterfly vaults.
- Hard-to-straighten outside corners.
- Double 5/8" outside corners.
- Obtuse angles.
- Replacing damaged metal corner bead.




Advantages over Competitors

| STRAIT-FLEX WIDE-FLEX 400 | COMPETITOR PAPER/PLASTIC FLEX | COMPETITOR PAPER/METAL FLEX |
|--|--|------------------------------------|
| PUR-Laminated Nose | No Protective Nose | No Protective Nose |
| Diamond-Punched 94 lb. Paper Superior Bond | Formulated Surface Paper Adequate Bond | Standard 84 lb. Paper Good Bond |
| Measurements Printed in US and Metric | No Printing | No Printing |
| Printed Center Line for Easy Alignment | No Printing | No Printing |
| Will Not Rust | Will Not Rust | Will Rust |

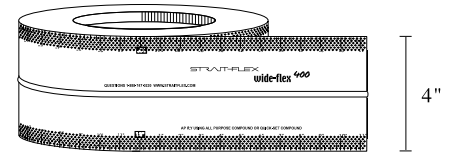

Directions for Use

- 1 Cut Strait-Flex WIDE-FLEX⁴⁰⁰ to desired length. Fold in half at center crease to desired angle.
- 2 Using a 5" or 6" taping knife, apply a liberal coat of all-purpose joint compound to inside or outside corners.
- 3 Press WIDE-FLEX⁴⁰⁰ into wet compound. Adjust if necessary to create a straight line. Wipe down with knife with additional pressure to the outer edge of WIDE-FLEX⁴⁰⁰. Immediately apply light skim coat of joint compound to outer edge and let dry.
- 4 Apply final coat, let dry, and sand.

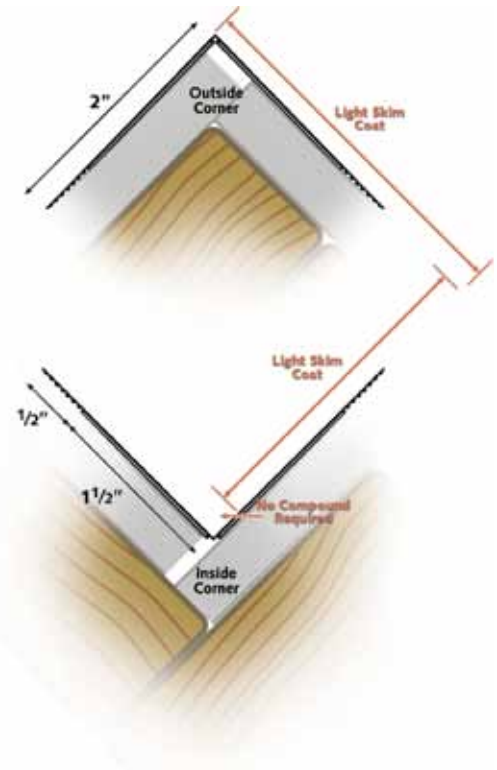

Specifications

- 4" x 100' roll size.
- Color Code BLUE
- Item# WF-100
UPC 6-56690-12373-6
- WHOLESALE PKG
7rls per case.
Case weight: 41 lbs.
24 cases per pallet.

Warranty

Strait-Flex products are backed by a lifetime warranty. When applied to a sound structure, built on a permanent foundation using recommended application techniques, we warrant that these products will not edge-crack for the lifetime of the structure. Contact Strait-Flex International, Inc. for complete details.

Storage

Store in a dry place protected from moisture.


Endorsements

Strait-Flex products are endorsed by the IUPAT (International Union of Painters and Allied Trades) of North America. Strait-Flex products are used in their day-to-day training curriculums.

Check out our website at www.straitflex.com

Diamond-punched pattern ensures ultimate bonding and faster drying.

Memory-free hinge design allows for sharp inside or outside corners



Strait-Flex's PVC composite material

STRAIT-FLEX INTERNATIONAL, INC. O'FALLON, MO
PHONE: 888.747.0220 FAX: 636.300.0414
STRAITFLEX.COM

L720310