




Installation Instructions Models A, B, C, D *without* Rope & Pull Kit



Included

- One roll of self-adhesive hook & loop

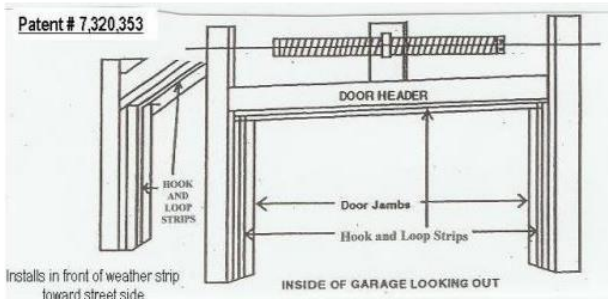

Not Included

- Hammer and Step Ladder
- 5/8" Roofing Nails (Optional for Step 4)
- 3/4" plastic pipe cut to width of screen (Step 5)



STEP 1

Cut the roll of self-adhesive hook & loop into 3 strips, two lengths equal to the height of the door jambs, and one long strip for the header.

STEP 2

Install and align the self-adhesive hook & loop strips on both door jambs about 1" in front (street side) of the door stops/weather strips. Next add the hook & loop strip to the header, so that it allows a smooth surface edge with both door jamb strips.

STEP 3

Starting at either upper corner, attach the screen to the hook & loop strip which is mounted already on the header. Next attach the screen to the hook & loop strips that are mounted on either of the door jambs of the garage door.

STEP 4 (Optional/Highly Recommended)

After fastening the screen to the header and door jambs, apply roofing nails (not included) through the straps at the top of the screen to the header to create a long term and permanent hold.

STEP 5

Insert a 3/4" rod into sewn pouch on bottom of screen to maintain position and shape when rolled up.

STORAGE/CLEANING

Take out any nails and separate hook & loop fastening system. Wash with mild soap and water. Allow to **thoroughly** dry before storing.

*Consumer Warning: The Fresh Air Screen is not designed to be a security wall and will not prevent children, adults, or aggressive animals from getting in or out of the garage or home.

Visit www.freshairscreens.com for Warranty Terms and Conditions.

