


SELF-ADJUSTING TOP & SIDE SEAL

For 9' Garage Door

Installation:

1. Measure width and height of garage door.
2. Shorten pieces if needed.
3. With the garage door closed, place the header strip so the sweep flexes against the door when closed. The rigid vinyl casing should be approximately 3/16" from the door. Nail the strip into place.
4. Repeat the process for the side strips.

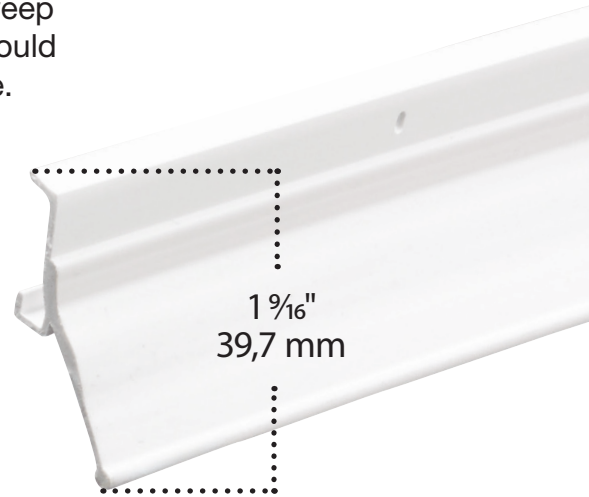

SELLO AUTO AJUSTANTE

Para puertas de garaje de 2,74 m

Instalación:

1. Mida el ancho y la altura de la puerta de garaje.
2. Corte las piezas si es necesario.
3. Con la puerta de garaje cerrada, coloque la tira superior de manera que la escobilla flexione contra la puerta cuando esté cerrada. El marco de vinilo rígido debe estar aproximadamente 5 mm de la puerta. Clave la tira en su lugar.
4. Repita el proceso para las tiras laterales.

TOOLS NEEDED:

HERRAMIENTAS NECESARIAS:



Follow Us **@FrostKing**
or **www.frostking.com**



Thermwell Products Co., Inc.
Mahwah NJ 07430 | Sparks NV 89431

Need help or information
about any Frost King product?

Call **1-877-FROST 20**
3 7 6 7 8

For videos, instructions, hints and tips
visit **www.frostking.com/instructions**