

Features

- Advanced spray engine provides three spray options: powerful massage, intense drenching, or wide coverage.
- Wide coverage spray produces an encompassing spray for everyday use.
- Intense drenching spray delivers a forceful spray ideal for rinsing soap from hair.
- Targeted spray is a focused stream for targeting sore muscles or use as a utility spray.
- KOHLER finishes resist corrosion and tarnishing for durability and reliability.
- Coordinates with other products in the Willamette collection.

Material

- Premium material for durability and reliability.

Technology

- Rite-Temp® technology automatically maintains water temperature within 3°F for anti-scalding protection and precise control.

Water Conservation & Rebates

- WaterSense®-labeled 1.75-gpm showerheads use at least 30 percent less water than standard 2.5-gpm showerheads while still meeting strict performance guidelines

Recommended Products/Accessories

K-R99801 24" Towel Bar
K-R99800 18" Towel Bar
K-R99802 Towel Ring
K-R99803 Toilet Paper Holder
K-R99804 Robe Hook

Optional Products/Accessories

1073881 Deep Rough-in Kit



Codes/Standards

ASME A112.18.1/CSA B125.1
ASSE 1016/ASME A112.1016/CSA B125.16
DOE - Energy Policy Act 1992
EPA WaterSense®
California Energy Commission (CEC)

KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.


Color	Code	Description
-------	------	-------------



CP	Polished Chrome
----	-----------------



BN	Vibrant® Brushed Nickel
----	-------------------------

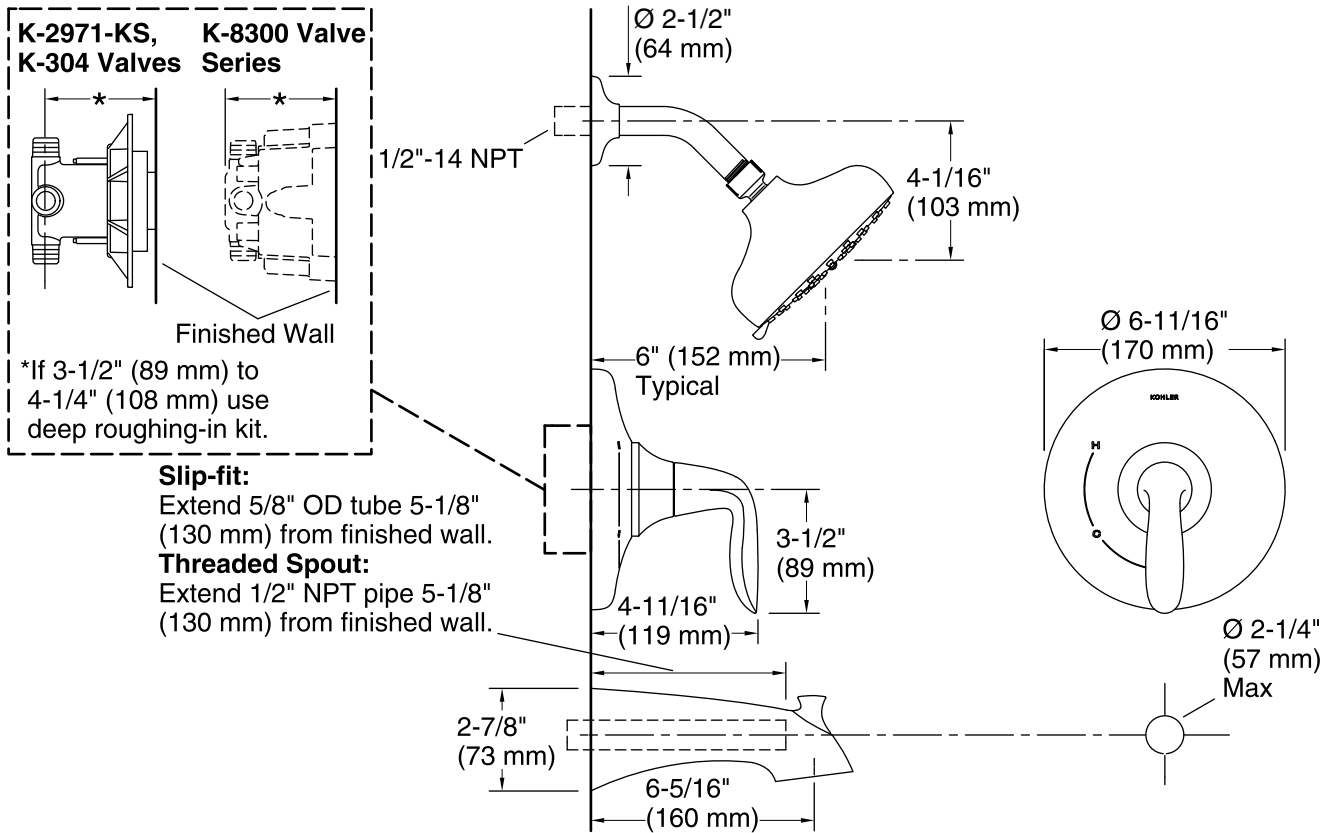

Technical Information

All product dimensions are nominal.

Shower Valve:

Flow rate - Max:	2 gal/min (7.6 l/min)
Flow rate - Min:	1.6 gal/min (6.1 l/min)
Pressure - Max:	80 psi (5.5 bar)
Pressure - Min:	45 psi (3.1 bar)
Valve body:	Machined-brass

Showerhead/Body Spray:

Rated maximum flow:	1.75 gal/min (6.6 l/min)
Pressure:	80 psi (5.5 bar)

Notes

Install this product according to the installation instructions.

For use with showerheads or handsprays rated at 1.6 gal/min (6.1 l/min) or higher.

Install straight pipe or tube drop of 7" (178 mm) to 18" (457 mm) with single elbow between the valve and the wall-mount spout.

NOTICE: Risk of product damage. Long screws, for installing trim, can damage the K-2971-KS valve. Consult the trim installation guide to verify if the thin wall installation kit (88526) is needed.