

Designers Fountain®

Distinctive Lighting

Project: Date:

Prepared by:

Comments:



FEATURES

- 5 Year Warranty
- Direct Retrofit **100W** Incandescent
- Energy Savings of up to 80%
- Cast Aluminum Housing & Trim
- Standard E26 Edison Screw Base Adapter
- Lumen Maintenance over 70% @ 50,000+ Hours
- Compatible w/Most Triac Phase-Control Dimmers
- No UV/IR Radiation, No Toxic Mercury
- Compatible with most 5"-6" Housings

OPTICS

- Deep Baffle Lens Trim
- Frosted White Lens

APPLICATIONS

- Ceiling Installations for General Ambient Lighting in Homes, Offices & Public Facilities
- Retail Store Lighting
- Museums, Galleries, Showrooms
- Hotels, Hospitality Areas
- Hospitals, Clinics, Workrooms
- Corridors, Lobbies, Stairways

CERTIFICATIONS

- cETLus Listed
- Energy Star Listed for Rebate and Tax Incentive Programs
- California Title 24 Compliant
- Rated for Wet-Locations

TRIM ORDERING OPTIONS

5"-6" LED Deep Baffle

MODEL NUMBER	KELVIN (CCT)	WATTS	LUMENS	CRI	TRIM COLOR
EV613950WH27	2700K	18.10	1323	93	DEEP WHITE BAFFLE
EV613950WH30	3000K	18.59	1441	91	DEEP WHITE BAFFLE
EV613950WH40	4000K	18.25	1480	93	DEEP WHITE BAFFLE
EV613950WH50	5000K	18.32	1535	93	DEEP WHITE BAFFLE

SPECIFICATIONS

Warranty:	5 yrs	Max. Ambient Temp:	45 °C	R-Value:	50	Beam Angle:	93°
Expected Life:	50,000 hrs	Min. Ambient Temp:	-18 °C	Power Factor:	>0.9	THD:	<20%

MOUNTING ACCESSORIES

Friction Mounting Blades



Spring Mounting Clips



Designers Fountain®

Distinctive Lighting


Project: Date:

Prepared by:

Comments:

DIMMING COMPATIBILITY

January 21, 2016		6730M/6731A/6731F 120 V Triac or phase-cut dimmers						
Brand	Type	Series	Model #	Wiring	Version Code	Max # of Luminaires	Min # of Luminaires For Proper Dimming	Dimming Range
Lutron	C.L.	Ariadni/Toggler C.L.	AYCL-153P	3-Way	T4, T8	14	1	3% - 96%
			TGCL-153P					
		Divia C.L.	DVCL-153P					
		Skylark C.L.	SCL-153P					
		Skylark Contour C.L.	CTCL-153P					
		Lumea C.L.	LGCL-153P					
	Maestro C.L.	MACL-153M	3-Way	2014	14	1	5% - 96%	
		MSCl-VP153M	single/multi	T2	14	1	4% - 96%	
		MSCl-OP153M	single/multi					
		MRF2-6CL	NA	M6	14	1	4% - 96%	
Nova T	NTCL-250	single	BR Y02	24	1	4% - 97%		
Grafik T	GT-150	single	T6	14	1	4% - 97%		
RF C.L.	Grafik T RF	GTJ 150	single	M6	14	1	4% - 96%	
Wireless	Caseta	PD-6WCL	NA	SD11	14	1	2% - 96%	
Leviton	Universal Dimmer	Decora	DSL06-1L	3-Way	NA	29	1	21% - 97%
		Illuma Tech	IPL06-10	3-Way	NA	14	1	5% - 97%
		Sureslide	6672-1L	single	NA	14	1	8% - 97%
		Sureslide	6674-P0	3-Way	NA	14	1	5% - 97%

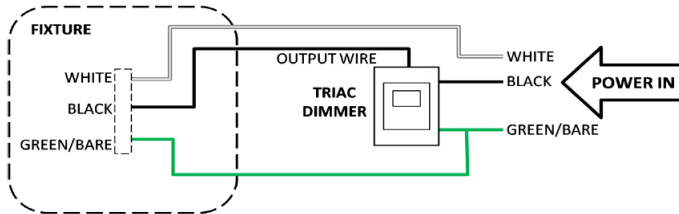

PHOTOMETRICS