

# Tile Trim Solutions

## Choose the Right Trim

Tile trims provide a beautiful finished look for your project while protecting edges against costly damage. Start by selecting a profile recommended for area where the tile is being installed. Then select the desired finish.

### Walls:

L-Shape • R-Shape • Q-Shape

### Floors:

L-Shape • Q-Shape • T-Shape • U-Reducer

### Counters:

R-Shape • L-Shape • Q-Shape • RS-Step



L-Shape



R-Shape  
Bullnose



Q-Shape



U-Shape  
Reducer



T-Shape



RS-Step

✓ 10 Year Wear & Finish Warranty

✓ Protects exposed edges from damage

✓ Patented integrated  
*Straight Edge Grout Line™*



## Finish Options

### Aluminum Profiles\*

#### SILVER (MF)

Available in L-Shape  
5/16", 3/8" & 1/2"



#### SATIN SILVER (MA)

Available in all Profiles L,  
Q, U, T, RS-Shape 3/8"



#### SATIN NICKEL (SN)

Available in L &  
R-Shape Profiles 3/8"



#### POLISHED CHROME (BDC)

Available in  
R-Shape Profile 5/16"



#### COPPER (CB)

Available in L &  
R-Shape Profiles 3/8"



#### TUSCAN GOLD (TG)

Available in L &  
R-Shape Profiles 3/8"




#### BRUSHED ANTIQUE BRONZE (BB)

Available  
in L & R-Shape Profiles 3/8"



#### BRIGHT WHITE (BW)

Available in R-Shape  
Profile 3/8"

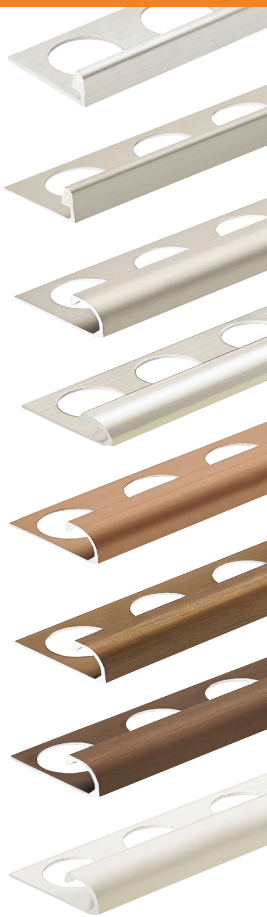

### PVC Profiles\*


#### BRIGHT WHITE (BW)

Available in L-Shape  
Profile 5/16" & 3/8"



#### SANDSTONE (SP)

Available in L & R-Shape  
Profiles 5/16" & 3/8"



\*Sample colors shown generally represent finishes available. Actual finish and color may vary slightly. It is recommended that you match an actual trim sample to tile before installing.

More options available at [homedepot.com](http://homedepot.com)

# Determine the Correct Size

The height (thickness) of your tile dictates the size of the trim. The trim should be at or slightly lower than the edge of the tile once it is installed. For example a tile that is 3/8" (10mm) thick should work with a 3/8" trim. However tile thickness can vary so it is a good idea to check the height before final installation.

Height of Tile	Trim Size
8mm	5/16"
10mm	3/8"
12.5mm	1/2"

All of the trims come in a 98.5" length

## Installation Tips

Tile trims are easy to install. The **Straight Edge Grout Line™** makes installation faster and eliminates the need for spacers between the trim and the tile.

- Cut trim to length and place the anchor leg into the mortar bed so the mortar pushes up through the perforated cutouts
- Trowel additional mortar over the anchor leg so it is completely covered
- Place the tile up against the trim
- Apply grout per manufacturers instructions
- Immediately clean any excess mortar or grout from the face of the profile

For additional information on Tile Trims:

[homedepot.com](http://homedepot.com)

1-800-443-6677

*CUSTOM® is a registered trademark of Custom Building Product. CUSTOM branded tile trims are manufactured under agreement by Columbia Aluminum Products. 2565 Sampson Ave, Corona, California*



# CUSTOM®

TILE INSTALLATION SYSTEMS

# REDGARD®


Uncoupling Mat

**Provides crack isolation, waterproofing and vapor management under tile and stone floors.**



- Use to replace 1/4" (6mm) backerboard or a second layer of plywood in flooring installations—1 roll replaces 3–4 sheets of 1/4" (6mm) backerboard
- Use with 5mm RedGard Seam Tape for waterproofing and vapor management
- Use with polymer modified thin-set mortar—as recommended for bonding porcelain and other difficult to bond tiles
- Reinforced fleece bonding layer locks in mortar for a strong bond
- No fasteners required
- Mat made from 70% recycled pre-consumer waste, by weight

**PREVENTS  
CRACKS IN TILE  
AND GROUT**

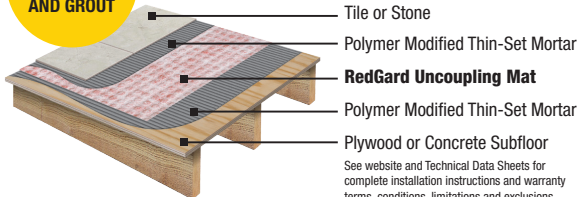

For additional information visit:

[homedepot.com](http://homedepot.com)

©2016 Custom Building Products. All rights reserved. The CUSTOM® logo and select product logos are registered trademarks of Custom Building Products, Inc. CUSTOM may make product modifications at any time without notice. Visit [homedepot.com](http://homedepot.com) for updated technical data sheets and SDS information.



# CUSTOM®

TILE INSTALLATION SYSTEMS

D2335595-01E