



## BLOCK OUT PESTS

### GREAT STUFF™ PESTBLOCK INSULATING FOAM SEALANT


GREAT STUFF™ Pestblock Insulating Foam Sealant blocks insects and pests from entering the home by sealing gaps, cracks and holes where they commonly enter.\*

#### SPECIALLY FORMULATED TO BLOCK PESTS

GREAT STUFF™ Pestblock Insulating Foam Sealant expands to fill, seal and insulate gaps up to 1" (25 mm), forming a long-lasting, airtight and water-resistant barrier. It blocks pests out of the home by eliminating points of entry.

The sealant:

- Blocks the entry of pests that can damage the house and its contents
- Contains no pesticides
- Forms a long-lasting, airtight and water-resistant barrier
- Reduces the need to reapply pesticides
- Helps improve the home's energy efficiency by sealing gaps and cracks

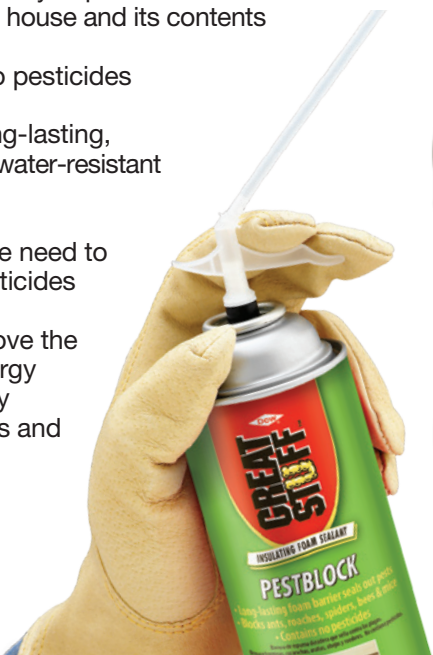

#### SIZE

GREAT STUFF™ Pestblock Insulating Foam Sealant is available in 12 oz. (340 g) cans with a convenient straw applicator.

#### REDUCE PEST INVASION



• Spiders




• Ants

• Bees



• Cockroaches

• Other insects



• Mice

• Other rodents



©™Trademark of The Dow Chemical Company ("Dow") or an affiliated company of Dow  
\* Consult the label and Material Safety Data Sheet carefully before use.

# BLOCK OUT PESTS WHERE THEY ENTER...

## REDUCE AIR LEAKS – SAVE MONEY

In addition to blocking pests from the home, GREAT STUFF™ Pestblock Insulating Foam Sealant air-seals holes, gaps and cracks to help keep air from leaking out of or seeping into the home's envelope. Air-sealing and insulating the home saves up to 20% on heating and cooling costs.\*\*

\*\*energystar.gov




PVC pipe penetration



Under baseboards




Water faucet penetration



Attic hatch frame



Dryer vent penetration



Sill plate and rim joists



Plumbing penetration



PVC pipe penetration

### DUAL BENEFITS

- Blocks out pests
- Air-seals the home

### GREAT STUFF™ PESTBLOCK INSULATING FOAM SEALANT

- Fills, seals and insulates gaps up to 1" (25 mm)
- Forms a water-resistant, airtight seal
- Bonds with most building materials and surfaces
- Trimmable, sandable and paintable
- Tack-free in 10-15 minutes<sup>(1)</sup>
- Interior/exterior use<sup>(2)</sup>

(1) Actual cure time will depend on temperature, relative humidity and size of foam bead.

(2) Skin of cured foam can discolor if exposed to natural light; paint or coat foam for best results.

## CONTACT DOW FOR MORE INFORMATION ABOUT BLOCKING PESTS OUT OF THE HOME.

THE DOW CHEMICAL COMPANY . Dow Building Solutions . 200 Larkin . Midland, MI 48674  
 DOW CHEMICAL CANADA ULC . Dow Building Solutions . 450 – 1st St. SW . Suite 2100 . Calgary, AB T2P 5H1  
 For Technical Information: 1-866-583-BLUE (2583) (English) . 1-800-363-6210 (French)  
 For Sales Information: 1-800-232-2436 (English) . 1-800-565-1255 (French)  
[www.dowgreatstuff.com](http://www.dowgreatstuff.com)

NOTICE: No freedom from infringement of any patent owned by Dow or others is to be inferred. Because use conditions and applicable laws may differ from one location to another and may change with time, Customer is responsible for determining whether products and the information in this document are appropriate for Customer's use and for ensuring that Customer's workplace and disposal practices are in compliance with applicable laws and other government enactments. The product shown in this literature may not be available for sale and/or available in all geographies where Dow is represented. The claims made may not have been approved for use in all countries. Dow assumes no obligation or liability for the information in this document. References to "Dow" or the "Company" mean the Dow legal entity selling the products to Customer unless otherwise expressly noted. NO WARRANTIES ARE GIVEN; ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY EXCLUDED.

Dow Polyurethane Foam Insulation and Sealants

CAUTION: When cured, these products are combustible and will burn if exposed to open flame or sparks from high-energy sources. Do not expose to temperatures above 240°F (116°C). For more information, consult (Material) Safety Data Sheet (M)SDS, call Dow at 1-866-583-2583 or contact your local building inspector. In an emergency, call 1-989-636-4400 in the U.S. or 1-519-339-3711 in Canada. When air sealing buildings, ensure that combustion appliances, such as furnaces, water heaters, wood-burning stoves, gas stoves and gas dryers, are properly vented to the outside. In Canada visit: <http://archive.nrc-cnrc.gc.ca/eng/lbp/irc/bsi/83-house-ventilation.html>.

GREAT STUFF™ Insulating Foam Sealants contain isocyanate and a flammable blowing agent. Read all instructions and (M)SDS carefully before use. Eliminate all sources of ignition before use. Cover all skin. Wear long sleeves, gloves, and goggles or safety glasses. Provide adequate ventilation or wear proper respiratory protection. Contents under pressure. Not to be used for filling closed cavities or voids such as between walls and under tub surrounds.

Building and/or construction practices unrelated to building materials could greatly affect moisture and the potential for mold formation. No material supplier including Dow can give assurance that mold will not develop in any specific system.

