


Features

- ExoCrylic™
- Six individually adjustable ProFlex® hydro-massage jets
- Drop-in installation
- Optional K-9696 whirlpool trim kit in additional finishes
- Pump with air switch and grounding-type plug-in cord
- Molded lumbar support and armrests for comfort
- Tile flange on two sides for corner installation [K-1154-F]
- 54" (1372 mm) x 54" (1372 mm) x 20" (508 mm)

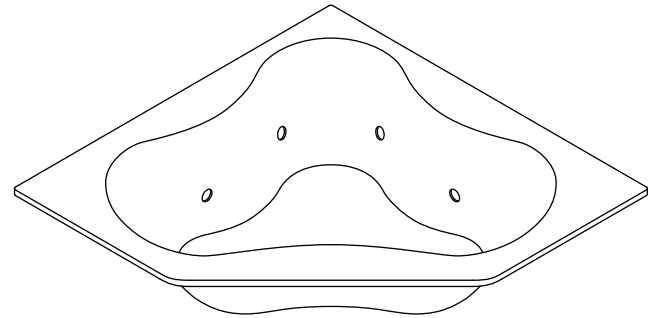

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.19.7/CSA B45.10
- CSA B45.5/IAPMO Z124
- UL 1795

Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories

- 0: White
- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes	
K-1154	Whirlpool bath – drop-in (shown)	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
K-1154-F	Whirlpool bath – tile flange	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____

Recommended Accessories			
K-7213	Clearflo bath cable drain with PVC tubing	<input type="checkbox"/> CP	<input type="checkbox"/> Other _____
K-7214	Clearflo bath cable drain without PVC tubing	<input type="checkbox"/> CP	<input type="checkbox"/> Other _____
K-11677	Adjustable trip lever bath drain	<input type="checkbox"/> CP	<input type="checkbox"/> PB

Product Specification

The ExoCrylic whirlpool bath shall be 54" (1372 mm) in length, 54" (1372 mm) in width, and 20" (508 mm) in height. Whirlpool shall be drop-in [K-1154] or tile flange on two sides for corner installation [K-1154-F]. Whirlpool shall have six individually adjustable ProFlex hydro-massage jets, and pump with air switch and grounding-type plug-in cord. Whirlpool shall have molded lumbar support and armrests for comfort. Whirlpool shall feature optional K-9696 whirlpool trim kit in additional finishes. Whirlpool bath shall be Kohler Model K-1154-_____ or K-1154-F-_____.

