
Installation

Cleaning the air hose

- □ A 1/4" air hose is required, with a maximum length of 25 ft.
- Clean the air hose of accumulated dust and moisture before connecting it to the air supply.



NOTE: If a longer air hose is required, connect a 3/8" air hose to the 1/4" air hose to ensure the spray gun has the necessary air supply.




2 Connecting to the air supply

- Always use clean dry air. Excessive moisture and dirt will greatly reduce the life of any air motor. We recommend the installation of an in-line filter-regulator as close to the tool as possible.
- Ensure all hoses and fittings are the correct size and secured tightly.



WARNING: Lubricators should not be used with spray guns. The use of an inline lubricator will damage the paint finish.

Recommended Air Line Set-Up	
Part	Description
Α	Spray Gun
В	Regulator
С	Quick Plug
D	Quick Coupler
Е	Air Hose
F	In-line Filter
G	Air Compressor

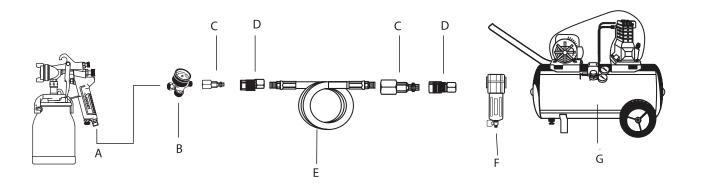

5

HUSKYTOOLS.COM