

Bare Armored Ground Cable Technical Specifications

Armor


Interlocked Galvanized Steel Strip

Conductors

Solid 8 AWG and 6 AWG Copper
7 Strand 4 AWG Copper

References & Ratings

- UL 467 E82631
- NEC® 250.118(1), 250.64(B)

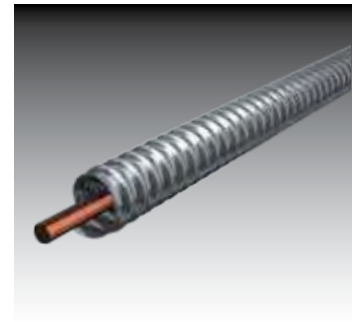

Product Code Stock Items		Trade Size	Length (ft)		Approx. Weight/ 1,000ft (lbs)	Approx. Armor O.D. (in)
Coil	Reel		Coil	Reel		
Bare Armored Ground Cable						
1301-42-00	1301-60-00	8-1 Solid	250'	1000'	180	0.470
1302-42-00	1302-60-00	6-1 Solid	250'	1000'	210	0.470
1303-42-00	1303-45-00	4-1 Stranded	250'	500'	284	0.530

NOTE: All dimensions and weights are subject to normal manufacturing tolerances

Armored Thermostat Cable

Armor

Galvanized Steel Interlocked Armor

Conductors

Solid Copper

Insulation

Type TFN

Assembly Covering


Moisture Resistant Fire Retardant Paper Wrap

Maximum Temperature Rating

90°C (Dry)

Maximum Voltage Rating

600V

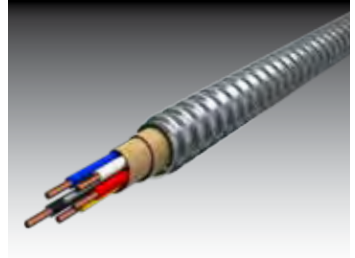

Product Code Stock Items		Trade Size	Length (ft)		Approx. Weight/ 1,000ft (lbs)	Approx. Armor O.D. (in)
Coil	Reel		Coil	Reel		
Armored Thermostat Cable						
2501-42-00	2501-60-00	18-2 (Black, White)	250	1000	135	0.47
2502-42-00	2502-60-00	18-3 (Black, Red, White)	250	1000	142	0.47
2503-42-00	2503-60-00	18-4 (Black, Red, Blue, White)	250	1000	149	0.47
2504-42-00	2504-60-00	18-5 (Black, Red, Blue, Yellow, White)	250	1000	157	0.47
2505-42-00	2505-60-00	18-6 (Black, Red, Blue, Yellow, Orange, White)	250	1000	172	0.492
2506-42-00	2506-60-00	18-8 (Black, Red, Blue, Yellow, Orange, Brown, Purple, White)	250	1000	196	0.517