



NICOR[®] | LED

2" **LED** Downlight Series
DLR2 | DQR2 | DLG2

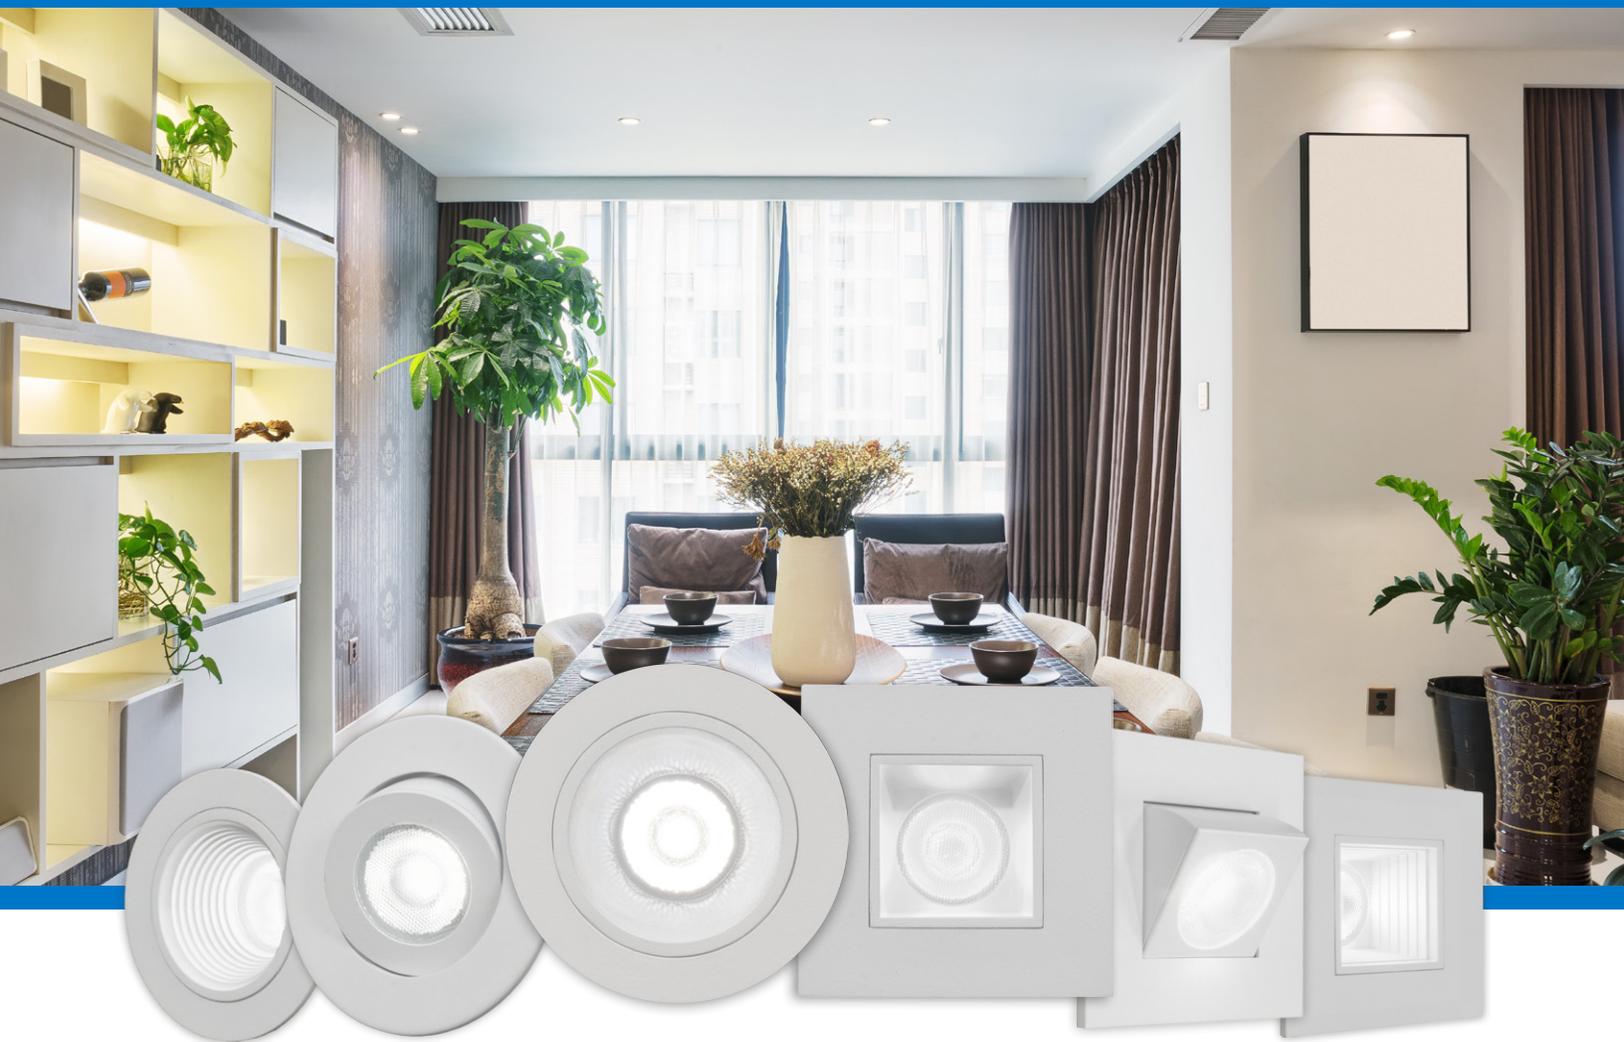

Small lights. **Big impact.**

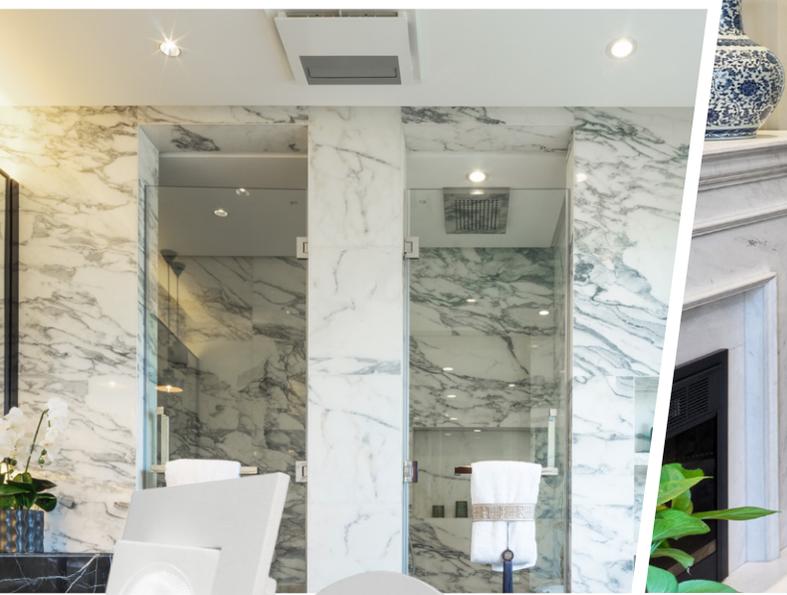


NICOR's D-Series luminaires offer a comprehensive family of LED downlight fixtures that complement one another regardless of your design space needs. The new 2" family packs a punch with its small, elegant design along with its high lumen output. Not only does this family work perfectly for accent

and task lighting, but the lighting output allows you to bring general ambient lighting into a space with a very small, elegant appearance. From LED color rendering and trim finishes to fixture performance, this series is a perfect choice for commercial, retail, institutional, and residential applications.

DLR2

2" Recessed LED Downlight

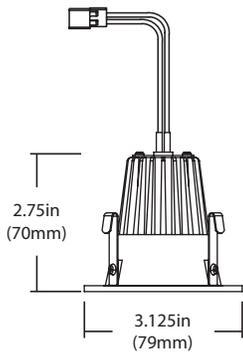

Dimmable



Die Cast Aluminum



Optic Options



Lumen Output



Color Rendering Index

TRIM OPTIONS

WHITE

NICKEL

OIL RUBBED BRONZE

BLACK




TRIM OPTIONS

- Smooth
- Baffle



DLR2

2" Recessed LED Downlight w/baffle

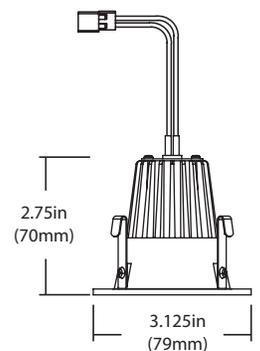

WHITE

NICKEL

OIL RUBBED BRONZE

BLACK

TRIM OPTIONS



Dimmable



Die Cast Aluminum



Optic Options




Lumen Output



Color Rendering Index

DQR2

2" LED Downlight Square

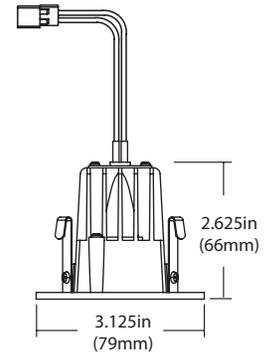

Dimmable



Die Cast Aluminum



Optic Options



UP TO 690Lm



>90 CRI
R9 greater than 50

TRIM OPTIONS

WHITE

NICKEL

OIL RUBBED BRONZE

BLACK




TRIM OPTIONS

Smooth Baffle



DQR2

2" LED Downlight Square w/baffle

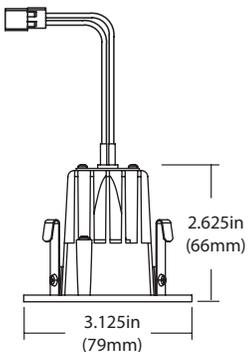

Dimmable



Die Cast Aluminum



Optic Options



UP TO 690Lm



>90 CRI
R9 greater than 50

TRIM OPTIONS

WHITE


NICKEL

OIL RUBBED BRONZE

BLACK

DQR2-AA

2" LED Adjustable Downlight Square



Dimmable



Die Cast Aluminum



Optic Options



UP TO 780Lm



Adjustability



>90 CRI
R9 greater than 50
Color Rendering Index


TRIM OPTIONS

WHITE

NICKEL

OIL RUBBED BRONZE

BLACK




Adjustable Wall Wash

DQR2-AA and DLG2 both offer adjustable trims to provide wall wash lighting.



DLG2

2" LED Downlight Gimbal



Dimmable



Die Cast Aluminum



Optic Options



UP TO 700Lm



Adjustability



>90 CRI
R9 greater than 50
Color Rendering Index

TRIM OPTIONS

WHITE

NICKEL

OIL RUBBED BRONZE

BLACK

Beam Angle Options



20° Specialty Spot Optic



30° Specialty Narrow Flood Optic



37° Standard Flood Optic



Available for all
2" Downlights

Features

Multiple Color Options

White, black, nickel, and oil rubbed bronze options available.

Friction Clips

Compatible with NICOR 2" recessed housings using a friction clip system for installation.

Beam Angle Options

Available in 20°, 30°, and 37° beam angles.

Superior Color Rendering


NICOR's 2" downlights are engineered for higher accuracy color rendering. CRI > 90.

Durable Construction

Durable all metal construction

Easy Installation

Snap-in Ideal connectors make installation into NICOR 2" housings quick and easy

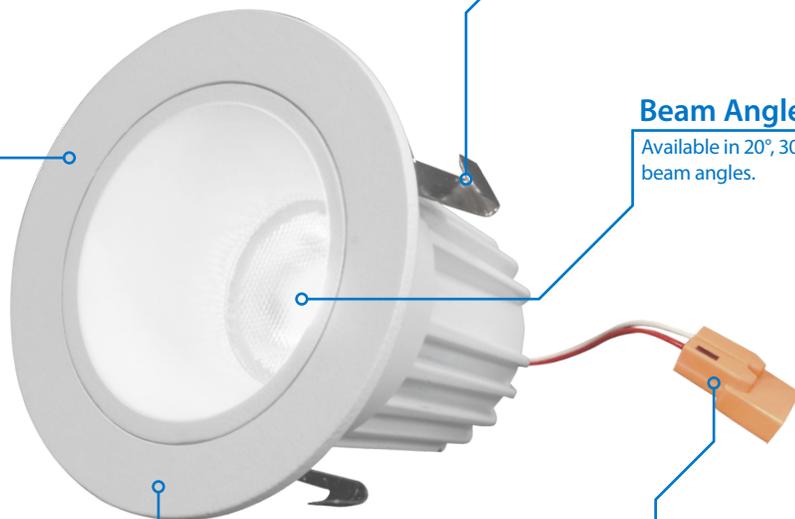

Construction

- Cast aluminum trim routes heat away from electrical components
- NICOR 2" LED housing required for use of 2" LED Downlight Series

Optical System

- Optical lens diffusers eliminate "hot spots" and provide smooth, uniform light
- Beam spread options available: Standard Flood, Narrow Flood, and Spot

Electrical

- Utilizes high performing LEDs with greater than 90 CRI and an R9 greater than 50
- Dimmable to 10% with most standard triac dimmers
- Operating temperature rating of 0°F to 120°F (-18°C to 49°C)
- Lifetime rated for greater than 35,000 hours
- LM-79, LM-80 testing performed in accordance with IESNA standards
- 120V input to driver

Finish

- Exterior white powder coat finish
- Also available in Black, Oil-Rubbed Bronze and Nickel

Installation

- NICOR's 2" recessed housings required: Available in remodel, new construction, and IC/ Airtight new construction
- Quick and easy installation with a snap-in IDEAL connector and friction clip mounting system

Warranty

- 5-year limited system warranty standard

Product Information	DLR2	DQR2	DQR2-AA	DLG2
LED Lifetime:	35,000 hrs	35,000 hrs	35,000 hrs	35,000 hrs
Input Voltage: (input to driver located in 2" housing)	120V	120V	120V	120V
Power Draw:	9W	9W	9W	9W
Delivered Lumens*:	680 Lm	631 Lm	696 Lm	700 Lm
System Efficacy*:	78 Lm/W	71 Lm/W	81 Lm/W	82 Lm/W
Correlated Color Temp:	3000K	3000K	3000K	3000K
Color Rendering Index:	93 CRI	93 CRI	92 CRI	92 CRI

* Performance data shown at 3000K
For more information, visit www.nicorlighting.com



DLG2 & DQR2-AA not Wet Location Rated

ORDERING INFORMATION

Example: DLR2-10-120-3K-WH-BF-NF

Series	Version	Housing Input Voltage	CCT's	Trim	Baffle	Optics
DLR2	10 (v 1.0)	120 (V)	2K (2700)	WH (white)	blank (no baffle)	blank (37" Standard Optic)
DQR2			3K (3000)	BK (black)*	BF (baffle)**	NF (30" Narrow Optic)
DQR2-AA			4K (4000)	NK (nickel)*		SP (20" Spot Optic)
DLG2				OB (oil-rubbed bronze)*		

* only available as special order. Contact NICOR for more info.
** only available for DLR2 and DQR2.

LED Housings

Remodel Housing



ORDERING INFORMATION

Catalog Number	Description
12202R-LED	2" LED Remodel Housing

New Construction Housing



ORDERING INFORMATION

Catalog Number	Description
12201-LED	2" LED New Construction Housing

New Construction IC Rated Housing



ORDERING INFORMATION

Catalog Number	Description
12200A-LED	2" LED IC/AT New Construction Housing

Warehouse Locations

Albuquerque NM
Atlanta GA
Detroit MI
Miami FL
San Antonio TX
Syracuse NY

T 800.821.6283
F 800.892.8393
www.nicorlighting.com
2200 Midtown Place NE
Albuquerque NM 87107 USA



LIT-2IN 0516
©2016 NICOR® • ALL RIGHTS RESERVED