






OVERALL DIMENSIONS

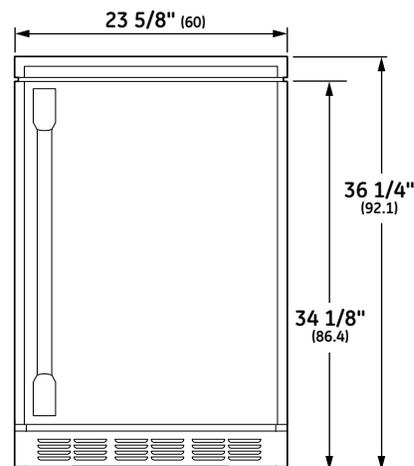

FRONT VIEW

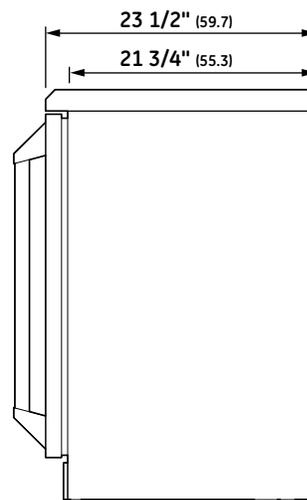

SIDE VIEW

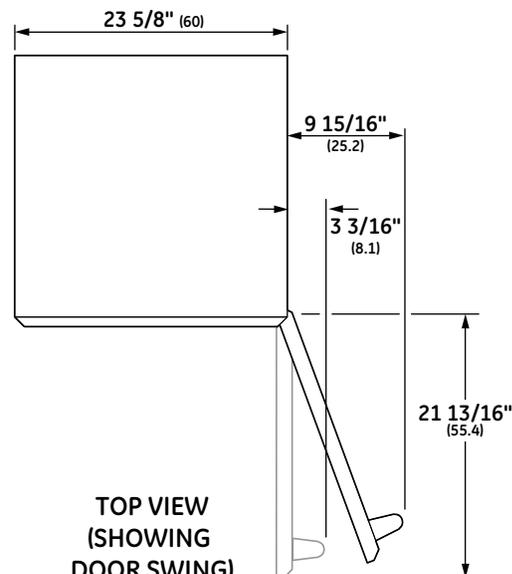

TOP VIEW
(SHOWING
DOOR SWING)

Dimensions in parentheses are in centimeters unless otherwise noted.

Actual product dimension may vary due to manufacturing tolerances.

SPECIFICATIONS


Overall Width	23 5/8" (60 cm)
Overall Height	36 1/4" (92.1)
Overall Depth	23 1/2" (59.7 cm)
Door Clearance	9 15/16" (25.2 cm) @ 110° 3 3/16" (8.1 cm) @ 90° 21 13/16" (60.6) door length
Overall Capacity	5.4 cu. ft.
Minimum Cabinet Width	23 3/4" (60.3 cm)
Minimum Cabinet Depth	24" (60.9 cm)
Cutout Width	23 3/4" (60.3 cm)
Cutout Height	34 1/2" (87.7 cm) Min 36 1/2" (89 cm) Max
Electrical Requirements	1.0 A
Voltz/Hertz/Amps	120 V, 60 Hz, 15 or 20 amp circuit
Shipping Weight	154 lb (70 kg)

ATTENTION ELECTRICIAN:


A 115 volt 60Hz., 15 or 20 amp power supply is required. An individual properly grounded branch circuit or circuit breaker is recommended. Install a properly grounded 3-prong electrical receptacle recessed into the back wall.



INSTALLATION

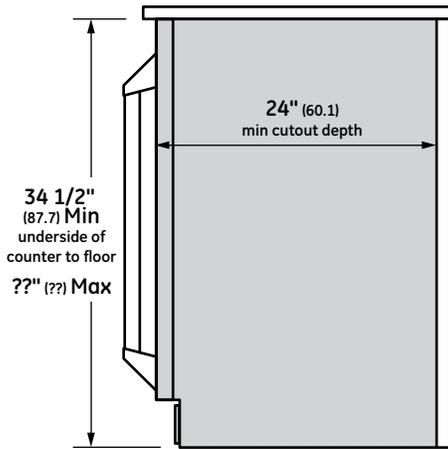

FLUSH CUTOUT INSTALLATION
SIDE VIEW

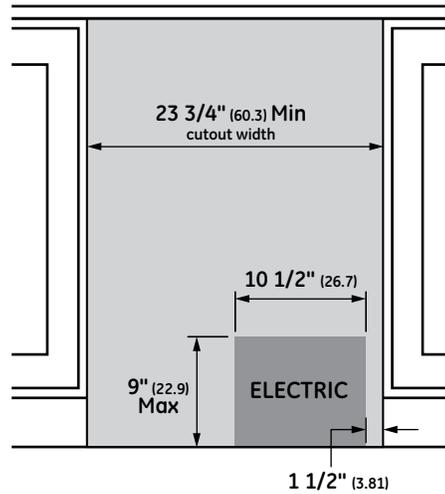

INSTALLATION CUTOUT
FRONT VIEW

NOTES

Note: If installing between frameless cabinets, a 1/2" wide filler strip or side panel may be required. The filler strip will act as a spacer between the door case and adjacent cabinet and will prevent interference with cabinet door swing. The width of the opening must include filler panels.

Note: This product can be installed as a built-in or used free-standing. The top canopy can be removed for installation below a countertop.

The cutout depth must be 24"

The cutout dimensions shown allows for a full door swing and access to the pull-out racks when installed as a built-in.

- The outdoor/indoor refrigerator can be used freestanding.
- Stainless steel top canopy can be removed for built-in installation.
- Vented stainless steel toekick.

FEATURES AND BENEFITS

Stainless Steel Outdoor design - Sturdy, professional grade exterior stands up to the most demanding environmental conditions

Adjustable Temperature Control - Maintains a consistent temperature

LED Temperature Display - Allows you to monitor the temperature at a glance

Removable Spillproof Glass Shelves - Helps contain spills for ease of cleaning

Professional-Style Handle - Coordinates with other Monogram Professional cooking appliances

Stainless steel removable canopy - Canopy protects the top of the refrigerator in outdoor environments and can be removed to allow built-in installation

Stainless Steel Exterior - Convey a look of utmost polish and sophistication

Quick Space Shelf - Slides out of the way to make room for tall items

Beverage Shelf on Full-Extension Slides - Holds up to five wine bottles or ten 12-oz. cans



ZDOD240HSS - right-hinged door

