

Features

- Acrylic
- Slotted overflow for maximum bathing depth
- Low threshold height
- Integral lumbar support
- Armrests
- 60" (152.4 cm) x 32" (81.3 cm) x 19" (48.3 cm)

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ANSI Z124.1.2
- IAPMO/UPC
- Underwriters Laboratories (UL)
- CSA B45
- CSA International

5' (1.5 m) DROP-IN BATH K-1123



Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

Accessories:

- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes		
K-1123	Drop-in bath	0	□ Other	
Required Accessories				
K-7272	Bath drain – above or through-the-floor installation	□ CP	Other	

Product Specification:

The acrylic drop-in bath shall be 60" (152.4 cm) in length, 32" (81.3 cm) in width, and 19" (48.3 cm) in height. Bath shall have slotted overflow for maximum bathing depth, low threshold height, and integral lumbar support. Bath shall have armrests. Bath shall be Kohler Model K-1123-

ARCHER

Technical Information

Fixture*:			
Bathing well			
Basin area bottom	45-1/8" (114.6 cm) x 19-11/16" (50 cm)		
Basin area top	52-3/4″ (134 cm) x 25-5/16″ (64.3 cm)		
Weight	70 lbs (31.7 kg)		
To overflow			
Water depth	15" (38.1 cm)		
Capacity	58 gal (219.5 L)		
* Approximate measurements for comparison only.			
Drop-in cutout dimensions:			
58-1/2" (148.6 cm) x 30-1/2" (77.5 cm)			

Installation Notes


Install this product according to the installation guide.

Floor support under this product must provide for a minimum of 44 lbs/square foot (212 kg/square meter) loading.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

This bath is designed for drop-in installation only. It is not suited for use in a three wall alcove with an overhead shower.

No change in measurements if connected with drain illustrated. (K-7272)

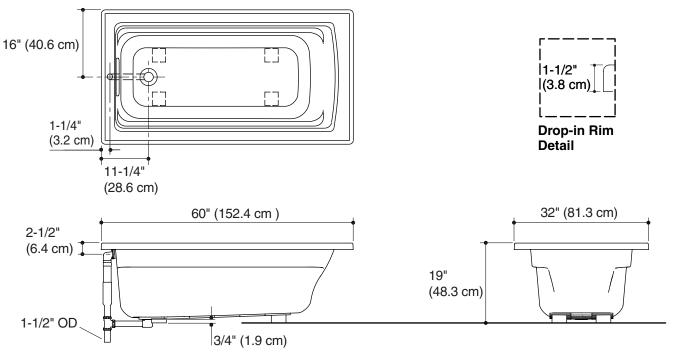

Product Diagram

