

RV, Trailer, and Mobile Home Roof Repair and Maintenance



LIFETIME WARRANTY



A system approach for RV, trailer, and mobile home roof restoration
and weatherproofing from the #1 Choice of Professionals.®

Why Restore Your Roof with Tropi-Cool® 100% Silicone Roof Coating and Sealants?

- **Save Money** – lower cost than roof replacement
- **Occupant Comfort** – keep interior spaces cooler
- **Cool Roof** – lower roof surface temperatures
- **Durability** – prolong service life of roof
- **Lightweight** – adds minimal structural load
- **HVAC Efficiency** – reduce wear and tear
- **Easy Application** – roll, brush, or spray
- **Lifetime Warranty**

Silicone roof protection in as little as one coat!

Tropi-Cool® 100% Silicone Roof Coating and Sealants can be used on many different RV, trailer, and mobile home roofs to reflect the sun's heat and UV rays, as well as to help seal and protect the surface.

What products to use:

TO PREP

- **Henry® 884 Tropi-Cool® 100% Silicone Roof Sealant**
- **Henry® 885 Tropi-Cool® 100% Silicone Seam & Repair Roof Sealant**

- Lifetime Warranty
- Permanent Ponding Water Resistant
- Excellent Adhesion – Vertical and Horizontal Applications
- Superior UV Resistance and Weathering Characteristics
- No Hardening, Chalking, Cracking, or Cracking
- Mold and Mildew Resistant
- Wide Application Temperature Range from 35°F to 120°F (2°C to 49°C)
- Ready to Use and Easy to Apply
- Works on Metal Roofs, Aged Single-Ply Roofs, Aged Asphalt Roofs, and More



10.1 Fl. Oz. 1 gallon

TO COAT

- **Henry® 887HS Tropi-Cool® 100% Silicone Roof Coating**

- Lifetime Warranty
- Permanent Ponding Water Resistant
- Saves Energy by Reflecting Heat
- 1 Coat Application
- Rain Safe in 1 Hour
- Excellent Adhesion and Flexibility
- Superior UV Resistance and Weathering Characteristics
- Mold and Mildew Resistant
- Wide Application Temperature Range from 35°F to 120°F
- Easy To Apply by Roller, Brush, or Spray
- Works on Metal Roofs, Aged Single-Ply Roofs, Aged Asphalt Roofs, and More



1, 5, & 55 gallon



Getting Started:

Before getting on the roof of your RV, trailer, or mobile home, consult your owner's manual for recommendations for walking on the roof. Ensure it is located on a level surface.

It is recommended that you inspect and clean your roof three to four times a year depending on usage, site, and storage. Consult your owner's manual to determine the type of roof and cleaning instructions.

Please read all product label instructions and cautions before attempting any project.

How to Restore Your Roof:



1 Clean it!

Using a pressure washer or high pressure nozzle on hose, use appropriate pressure to wash the roof with non-filming detergent, such as TSP or TSP substitute.



2 Prep it!

Repair and protect with Henry® 884 Tropi-Cool® 100% Silicone Roof Sealant or Henry® 885 Tropi-Cool® 100% Silicone Seam & Repair Roof Sealant, which are designed to work with Henry® 887HS Tropi-Cool® 100% Silicone Roof Coating.




3 Coat it!

Apply Henry® 887HS Tropi-Cool® 100% Silicone Roof Coating with a roller, brush, or sprayer.

Easy to use! Provides long-lasting waterproof seal.

Please read all product labels for complete instructions.

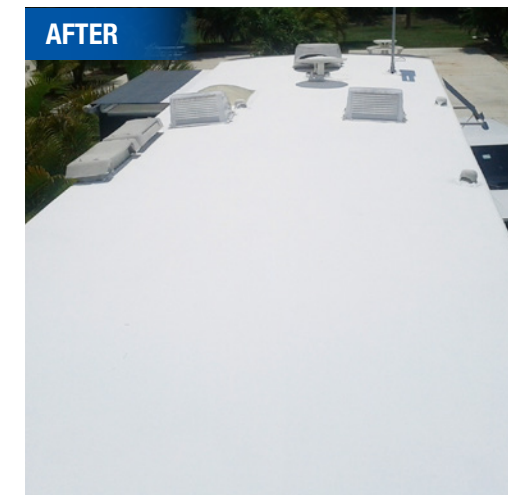

**For more information, visit www.henry.com
or for technical assistance call us at 800-486-1278.**

Please read all product label instructions, cautions, TDS, and SDS Sheets
before attempting any project.

Henry®

Henry Company

999 N. Sepulveda Blvd., Ste 800

El Segundo, CA 90245

800-486-1278

productsupport@henry.com

www.henry.com