

**For Residential and Commercial Applications**

Job Name		Engineer / Architect	
Job Location		Wholesaler	
Submittal Date		Contractor	

## VF1-\*\*DL & VF3-\*\*DL Speedi Plumb® Vinyl Toilet Connectors - Flare Inlet

**Use:** For use in potable water distribution systems in accessible locations only

**Design Features:**


- **No kink hose.** The specially engineered reinforced PVC hose provides unique flexibility to prevent kinking and crimping
- **Greater strength and durability** with a tighter weave and two-layer bonded construction, outperforms conventional vinyl connectors
- **Longer wing nuts** ease installation for speedier connections
- **Nitrile rubber washers** provide a large pliable sealing surface and ensures a long lasting water tight connection
- **8-sided pneumatic crimp** provides greater dependability for realible nut-to-hose connections

**Operating Specifications:**

**Temperature:** 40°- 140° F, intermittent to 180° F

**Pressure:** 125 psi maximum

**Tubing Diameter:** 0.300" I.D. (0.500" O.D.)

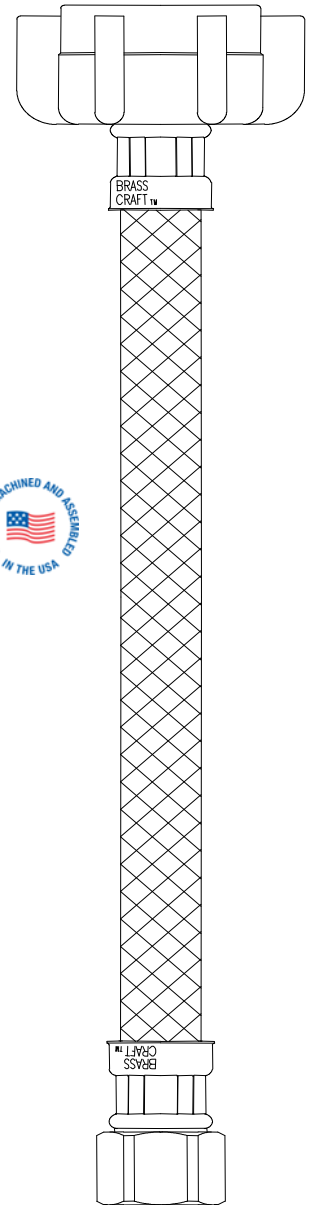

**MATERIAL SPECIFICATIONS**

<b>Hose</b>	<i>PVC with polyester braid reinforcement</i>
<b>Barbs</b>	<i>Compliant brass</i>
<b>Ferrules</b>	<i>Zinc plated 1008 steel</i>
<b>Ballcock Nut</b>	<i>Polypropylene</i>
<b>Inlet Nut</b>	<i>Chrome plated C36000 brass</i>
<b>Washers</b>	<i>Nitrile rubber</i>


**Part Listing:**

- VF1-12DL F                    3/8" Flare x 7/8" Ballcock x 12" Length
- VF1-20DL F                    3/8" Flare x 7/8" Ballcock x 20" length
- VF3-12DL F                    1/2" Flare x 7/8" Ballcock x 12" length

*This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft. This specification must be returned to BrassCraft if requested.*



# VF1-\*\*DL & VF3-\*\*DL Speedi Plumb® Vinyl Toilet Connectors - Flare Inlet

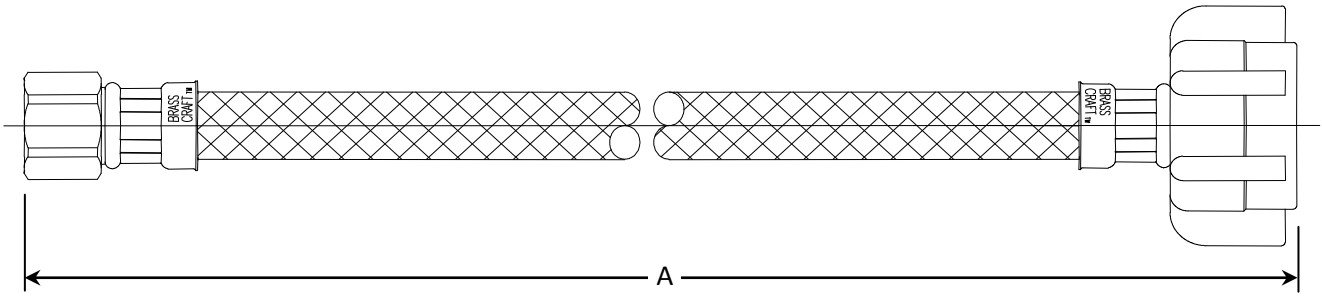

<b>PART DIMENSIONS (Inches)</b>	
<b>Model</b>	<b>Dim. A</b>
VF1-12DL	12.00 / 13.00
VF1-20DL	20.00 / 21.00
VF3-12DL	12.00 / 13.00

**Listings & Certifications:**

- IAPMO listed to ASME A112.18.6-2003 (File # 0452)
- CSA listed to ASME A112.18.6-2003 / CSA B125 (File # 204593)



*This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing, and shall not be disclosed to others without the written consent of BrassCraft. This specification must be returned to BrassCraft if requested.*

**BrassCraft®**