212x280mm

PULLEY (MODEL # 544-967)

Tools Needed: Phillips Screw Driver

Drill

ENGLISH

Installation instructions

1. Raise door completely and disconnect power and the lifting arm of garage door opener.
2. Retain door by fastening "C" clamps under bottom rollers on each side. **With tension completely off of cable**. Untie loose end of cable from track support or from the attaching plate.
3. Thread cable through the pulley, remove using wrench and replace with new pulley.
4. Rethread cable through the pulley and retie loose end of cable from track support or the attaching plate.
5. Slowly lower the door by hand to check that the cable is properly feed through pulleys.

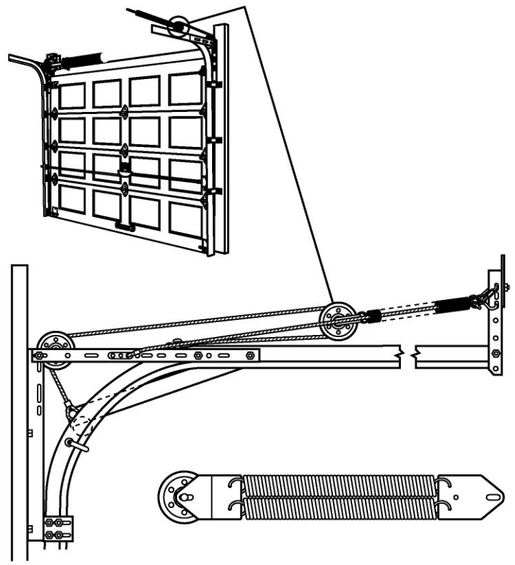

WARNING:
IMPROPER INSTALLATION OR DOOR POSITION CAN RESULT IN SERIOUS INJURY OR DEATH.

- Read and understand all instructions before you begin work.
- Wear safety goggles and gloves.
- Unplug power door opener and remove opener travel arm from door FIRST.
- Do not remove more than one part at a time.
- Do not attempt to raise or lower door without all components installed and securely tightened.
- Extension and torsion springs, along with attached hardware are under extreme tension at all times.
- All tension must be released from springs before any work is started.
- This hardware is intended for residential garage doors only.
- If you do not completely understand the installation instructions or are unsure whether the replacement part matches the part to be replaced, contact a professional installer.

POLEA (MODELO # 544-967)

Implementos necesarios: Destornillador Phillips



Taladro

ESPAÑOL

Instrucciones de instalación

1. Eleve la puerta completamente, y desconecte la energía y el brazo de elevación del abridor de la puerta de garaje.
2. Retenga la puerta asegurando las abrazaderas "C" bajo los rodillos inferiores en cada lado. Con la tensión totalmente eliminada del cable. Desate el extremo suelto del cable del soporte del riel o de la placa de fijación.
3. Inserte el cable a través de la polea, retire utilizando una llave y reemplace con la nueva polea.
4. Vuelva a insertar el cable a través de la polea y vuelva a atar el extremo suelto del cable del soporte del riel o de la placa de fijación.
5. Lentamente baje la puerta manualmente para verificar que el cable se encuentre adecuadamente insertado a través de las poleas.

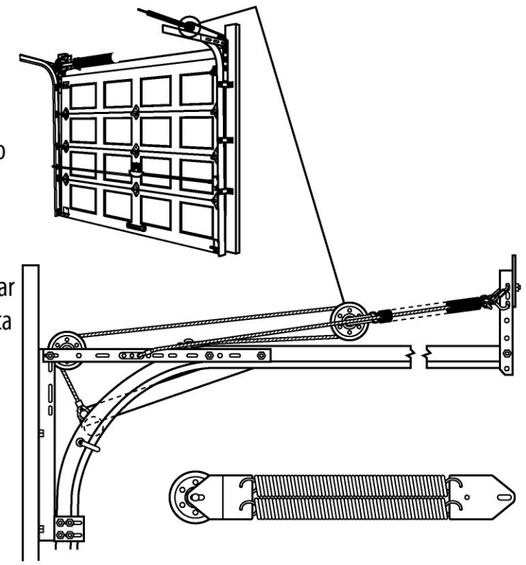

ADVERTENCIA: LA INSTALACIÓN O LA POSICIÓN INADECUADA DE LA PUERTA PUEDE OCASIONAR LESIONES GRAVES O LA MUERTE

- Lea las instrucciones antes de comenzar a trabajar
- Utilice gafas de seguridad y guantes
- Desenchufe el abridor de puerta motorizado y retire primero el brazo abridor de desplazamiento de la puerta
- No retire más de una pieza de cada vez
- No intente elevar o bajar la puerta sin haber instalado y fijado de forma segura todos los componentes
- Los resortes de extensión y torsión, así como los aditamentos de fijación están bajo presión extrema en todo momento
- Deberá haberse liberado toda la tensión de los resortes antes de comenzar cualquier trabajo
- Estos aditamentos están destinados únicamente para puertas de garajes residenciales
- Si no comprende completamente las instrucciones de instalación o no está seguro si la pieza de reemplazo es igual a la pieza que va a reemplazar, contacte a un instalador profesional