

### Features

- Two-handle widespread faucet for 8" - 16" centers.
- Two lever handles offer separate control of hot and cold water.
- Ceramic disc valves exceed industry longevity standards, ensuring durable performance for life.
- 1.2 gpm (gallons per minute) maximum flow rate.

### Material

- Constructed with premium materials for durability and reliability.

### Installation

- Simplified faucet assembly; mounting hardware requires no special tools.
- Handles come pre-assembled on valves to simplify installation.
- Includes clicker drain.

### Water Conservation & Rebates

- WaterSense®-labeled 1.2gpm faucets use at least 45 percent less water than standard 2.2-gpm faucets while still meeting strict performance guidelines.
- This product can help a building earn Water Efficiency points in the LEED® Green Building Rating System.



ADA CSA B651 OBC

### Codes/Standards

ASME A112.18.1/CSA B125.1

NSF/ANSI 61

NSF/ANSI 372

All applicable US Federal and State material regulations

DOE - Energy Policy Act 1992

EPA WaterSense®

California Energy Commission (CEC)

ADA


ICC/ANSI A117.1

CSA B651

OBC

### KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

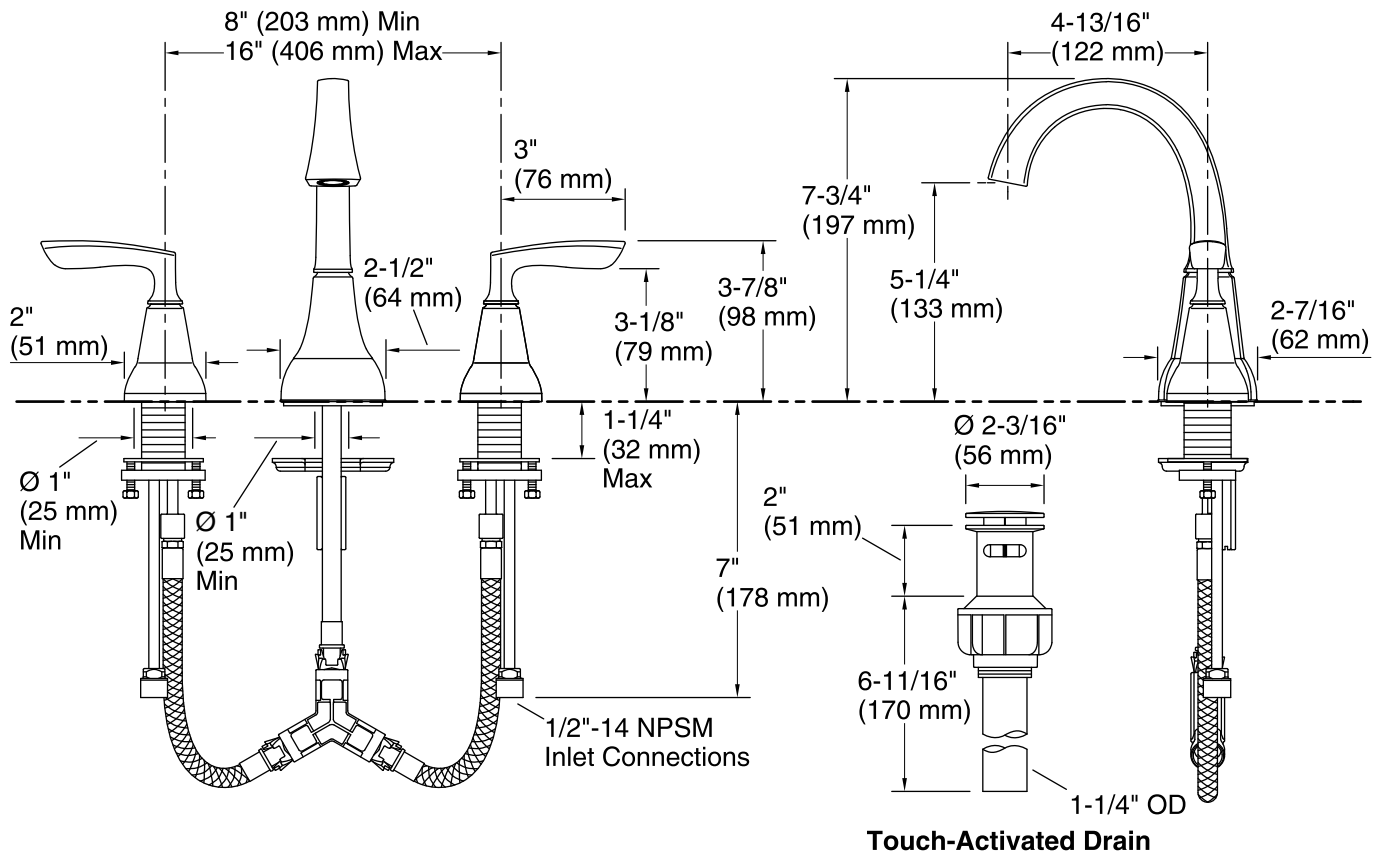

### Technical Information

All product dimensions are nominal.

#### Faucet:

Flow rate: 1.2 gal/min (4.5 l/min)

Pressure: 60 psi (4.1 bar)

Drain included: Yes

#### Spout:

Spout reach: 4-13/16" (122 mm)

Handle clearance: 3" (76 mm)

### Notes

Install this product according to the installation instructions.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.