Specifications



FEATURES

- · Requires 1 or 3-Hole Sink with 8" On-Center
- · Flexible Supply Lines with 3/8" Compression Fittings
- · Max Flow Rate: 1.8 gpm (6.8 L/min) at 60 psi
- · Max Countertop Thickness: 2 5/32"
- · Spout Reach: 7 1/2"
- · Spout Height: 14 19/32"
- · Ceramic Valve for Lifetime Drip-Free Operation
- · With Zinc Lever Handle
- · With Hands-Free ON/OFF Technology
- · With TurboSpray
- · FastMount Installation

CODE COMPLIANCE

- · IAPMO Certified: ASME A112.18.1/CSA B125.1
- · NSF 61 Section 9
- · NSF 372
- · Calgreen Certified
- · Meets AB 1953 Lead Standard
- · ADA Compliant









WARRANTY


· Limited Lifetime Warranty

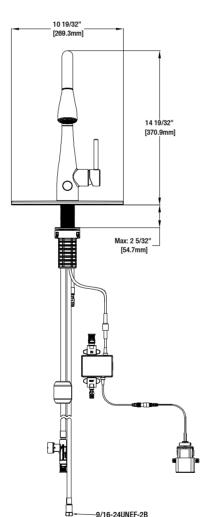



Nottely Touchless Single-Handle Pull-Down Kitchen Faucet



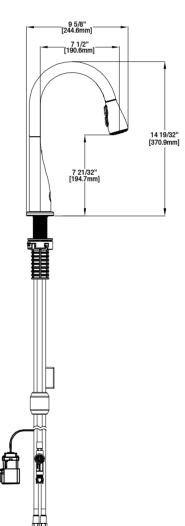

INSTALLATION DIMENSIONS

Glacier Bay reserves the right to make changes in specifications and materials and to change and discontinue models, both without notice or obligation. Dimensions are for reference only.