NICOR® LED

Under Cabinet Series
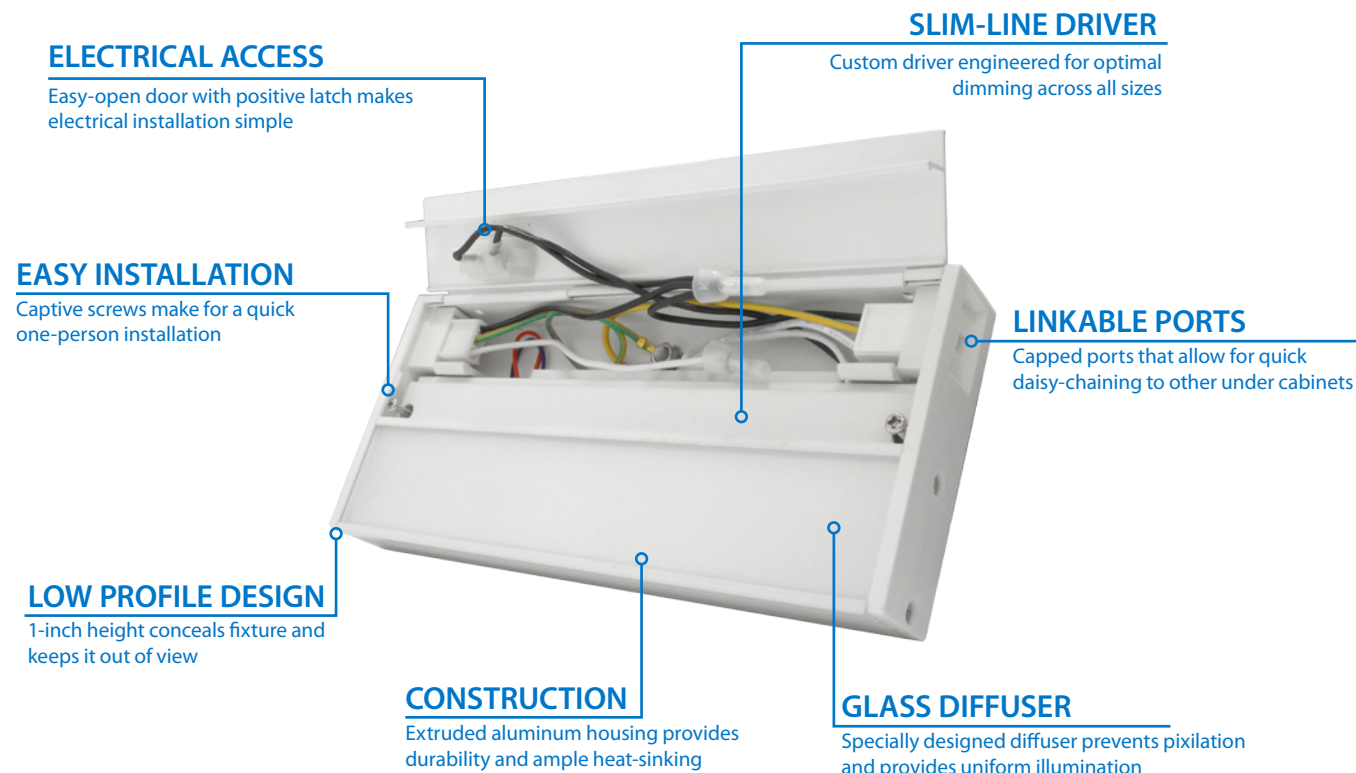**NUC-4** Linkable

LINKABLE

Warm, **Efficient**, **Economical**

NUC-4

LED Linkable Under Cabinet

Under cabinet lighting is an attractive upgrade that can quickly increase the value and functionality of your work space. NICOR's LED Under Cabinet series allows you to link multiple fixtures together with one power source. Whether in a kitchen, under a shelf or in a defined work space, these low profile fixtures are perfect for task or accent light levels. The NUC-4 presents a clean, professional look allowing you to use an existing wall switch or dimmer to easily control your lights. These linear fixtures are Energy Star rated, CEC Title 24 compliant and offer over 20 years of maintenance free operation. Offering uniform illumination, warm color and low operating temperatures, this under cabinet light can be used in **residential, retail, and commercial applications.**

ELECTRICAL ACCESS
Easy-open door with positive latch makes electrical installation simple

EASY INSTALLATION
Captive screws make for a quick one-person installation

LOW PROFILE DESIGN
1-inch height conceals fixture and keeps it out of view

SLIM-LINE DRIVER
Custom driver engineered for optimal dimming across all sizes

LINKABLE PORTS
Capped ports that allow for quick daisy-chaining to other under cabinets

CONSTRUCTION
Extruded aluminum housing provides durability and ample heat-sinking

GLASS DIFFUSER
Specially designed diffuser prevents pixilation and provides uniform illumination

NUC-4 | Linkable
Product Specs

Construction
Extruded aluminum housing for durability and ample heatsinking
Low 1-inch profile keeps the fixture unobtrusive and out of view
No UV or forward-projected heat
UL Listed for damp locations

Optical System
Uniform lighting with specially designed glass diffuser to prevent pixilation and "hot spots" on counter tops

Electrical
Linkable ports allow for easy daisy-chaining of multiple fixtures
Greater than 92 CRI with R9 greater than 50
Dimmable with most TRIAC dimmers
Custom low-profile driver engineered for optimal dimming across all sizes
Operating temperature rating of 0°F to 120°F (-18°C – 49°C)
120VAC Input
L70 rated for greater than >36,000 hours
TM-21 Projected L70(6k) life >100,000 hours
LM-79, LM-80 testing performed in accordance with IESNA standards
Meets FCC Part 15:2006 Class B requirements

Finish
Available in: Black, Nickel, White, and Oil-Rubbed Bronze

Installation
Easy surface mount installation
Linkability allows for more flexible installation with one power source
Linkable accessories needed: Connectors, J-box, Jumper Cables and Plugs
(see spec sheet for complete ordering information)
Pre-installed captive screws allow for quick mounting
Positive latch door for easy access and installation

Warranty
5-year limited system warranty standard

FINISH OPTIONS

WH **BK** **NK** **OB**

LINKABLE

Ordering Information					Example: NUC-4-12-DM-L-NK
Series	**Version**	**Length**			**Housing Color**
NUC	**4**	**08** (8 inches)	**DM** (Dimmable)	**L** (Linkable)	**BK** (black)
		12 (12 ½ inches)			**NK** (nickel)
		21 (21 ½ inches)			**OB** (oil-rubbed bronze)
		30 (30 inches)			**WH** (white)
		40 (40 Inches)			

All reports based on current industry standards; field performance may differ from laboratory performance.
Specifications and dimensions subject to change without notice.

DAMP LOCATION RATED — DL
FC — FCC
5 YEAR WARRANTY — 5Y
ENERGY STAR
T24 California Title 24 High Energy Compliant — Can be used for
c UL us LISTED

Warehouse Locations

Albuquerque NM
Atlanta GA
Detroit MI
Miami FL
San Antonio TX
Syracuse NY
Indianapolis IN

T 800.821.6283
F 800.892.8393
www.nicorlighting.com

2200 Midtown Place NE
Albuquerque NM 87107 USA

LIT-ULK 1016

NIC🟊R® | **LED**