



DRAWING TYPE	ITEM ID	ITEM DESCRIPTION	TECHNOLOGIES	DRAWING STATUS
Finish Good	595222	Seal Harbor Vtop 30.250 x 21.250 White	AB Composite	Design Process

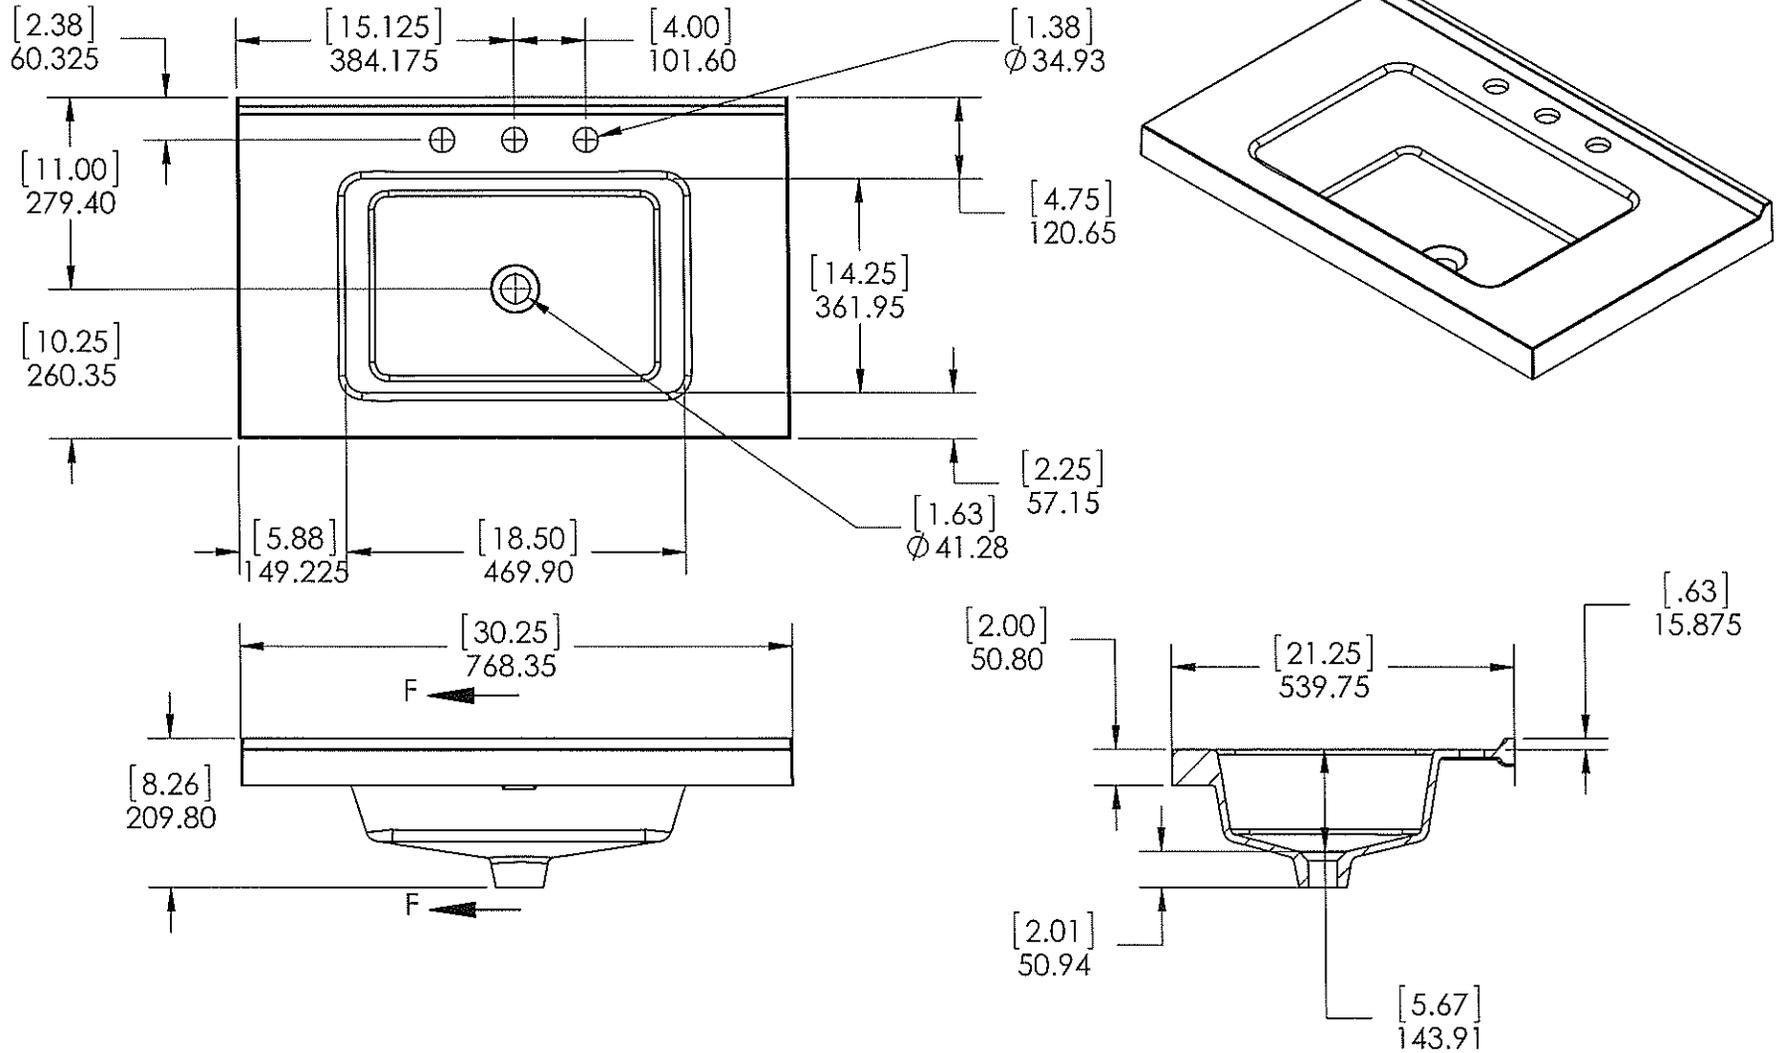


Estimated Weight: 18.95 kg


PROPRIETARY AND CONFIDENTIAL		DATE		
THE INFORMATION CONTAINED HEREIN IS THE SOLE PROPERTY OF WOODCRAFTERS, AND IS NOT TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE WRITTEN PERMISSION OF WOODCRAFTERS.		DRAWN BY E. SANDOVAL	DATE 6/27/16	
		CHECKED BY R. RUBIO	DATE 6/27/16	
		ENGINEER V. SANCHEZ	DATE 6/27/16	
		APPROVED BY C. LEAL	DATE 6/27/16	
WOODCRAFTERS Seal Harbor Vtop 30.250 x 21.250 White				REV 0

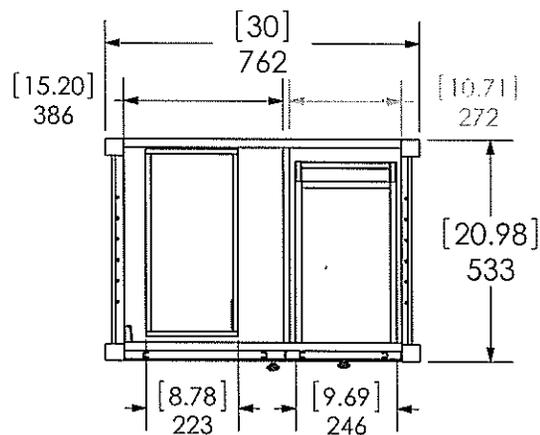


Vista Superior  
Top view

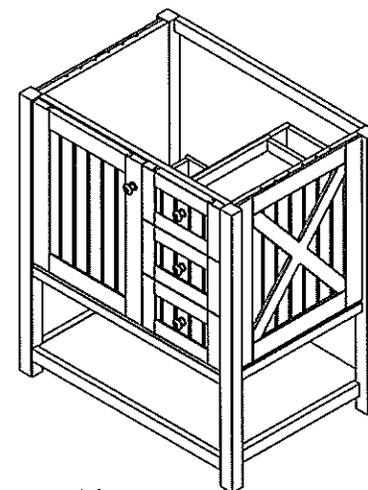


Vista Isometrica  
Isometric View

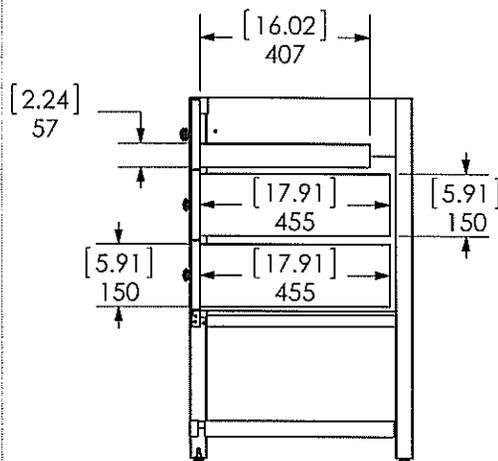

Vista Lateral  
Side View

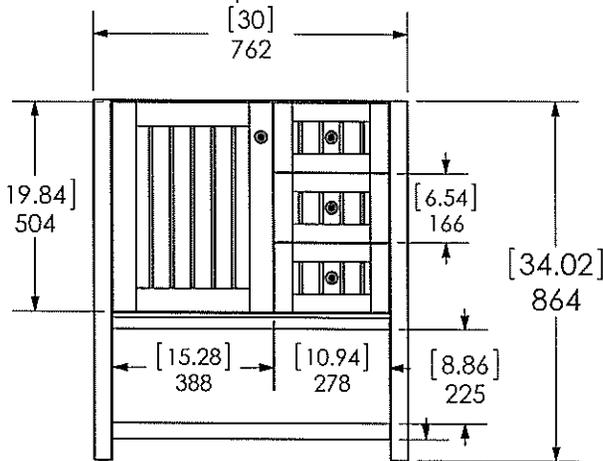

Vista Frontal  
Front view

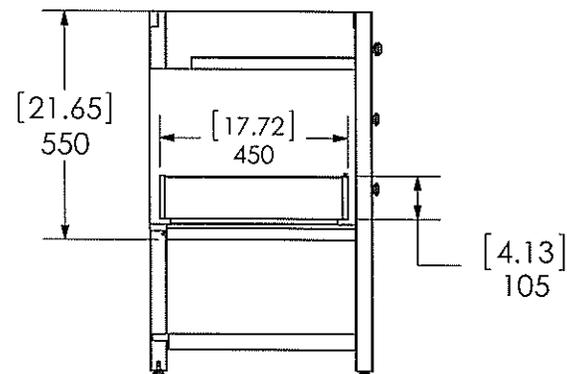

Vista Lateral  
Side View



ITEM: **SL30P2COM-SG** REV **A**

NAME: **Vanity Seal Harbor**

DWR	RZG	27/07/16	MATERIAL:	
REV	ING	27/07/16		N/A
APP	R&D	27/07/16		
SCALE: 1:20	MODEL:	Vanity Seal harbor 30		



Buy it for looks. Buy it for life.®

**DESCRIPTION**

- Duralock™ quick connect installation
- Metal construction with various finishes identified by suffix
- 1/2" IPS connections
- Includes non-metal pop-up waste assembly

**OPERATION**

- Lever style handles
- Hot side counterclockwise to open (clockwise to close)
- Cold side clockwise to open (counterclockwise to close)

**FLOW**

- Water usage is limited to these maximum flow rates as indicated by the corresponding product markings
  - 1.2 gpm max (4.5L/min) at 60 psi

**CARTRIDGE**

- 1234 cartridge design
- Nonmetallic and stainless steel material


**STANDARDS**

- Third party certified to WaterSense®, ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein
- Certified to NSF 61/9 & 372
- Products marked with 1.2 gpm are compliant with California water efficiency regulations
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- **ADA**  for lever handles

**WARRANTY**

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations


# Specifications

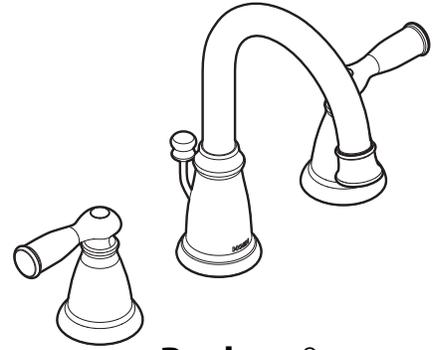

## Banbury® Two-Handle Widespread Lavatory Faucet

**Models:** WS84924 series

**NOTE:** SPOUT INSTALLS THROUGH 1-1/8" MIN. DIA. HOLE. VALVES INSTALL THROUGH 1-1/8" MIN. DIA. HOLE. For Deck Thickness 1-3/8" to 3", use service kit number 115001. Valves install through 1-1/4" dia. hole.

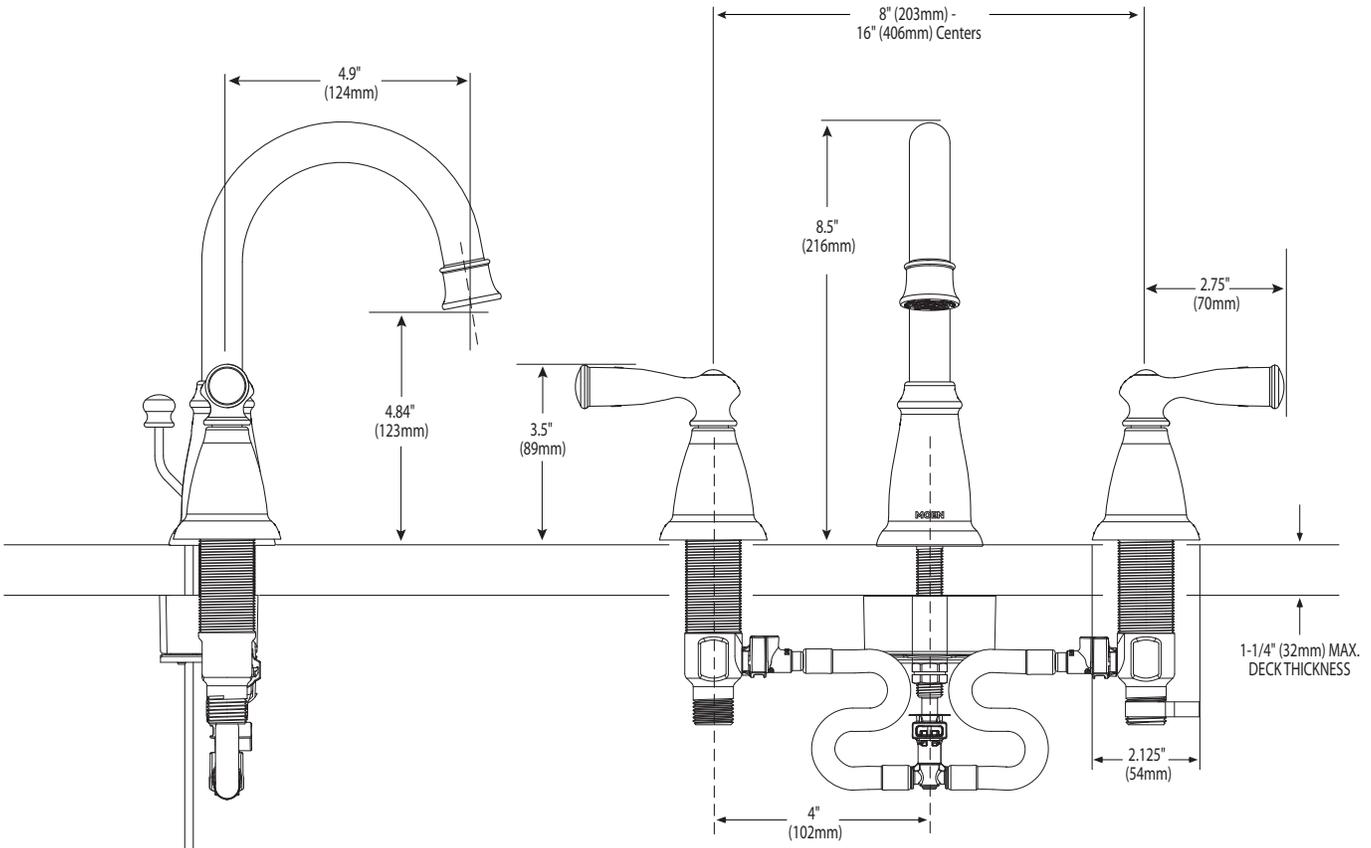

### CRITICAL DIMENSIONS

(DO NOT SCALE)

**FOR MORE INFORMATION CALL: 1-800-BUY-MOEN**

**www.moen.com**