

# Home Charging Dock

Model EVSE-RS



#### POWER PRESENT

The charging dock is receiving AC power.

#### READY TO CHARGE

The charging dock is ready to charge or charging is paused.

### VEHICLE CONNECTED


The connector is properly connected to the vehicle port or the charge is complete.

#### VEHICLE CHARGING

The vehicle is being charged.

#### **TROUBLE**

There is an error. Try removing the connector and inserting back into the vehicle. If TROUBLE indicator is still illuminated call Customer Service at 888-833-2148.

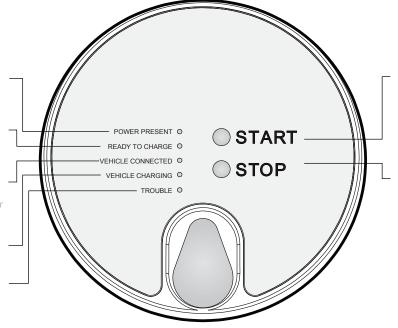


#### START

Press to resume charging after manual STOP. You do not need to press START in order to begin a regular charge. The POWER PRESENT and READY TO CHARGE lights must be on.

# STOP

Press to manually pause charging. You do not need to press STOP to complete a full charge. The device will stop automatically when it reaches full charge.



# RELEASE BUTTON


Press to release the Connector from the charging dock or the vehicle port.

Prototype image shown. Production model may van

# Quick Start Guide



Read and follow the User's Manual before attempting to use your Home Charging Dock. Failure to follow each instruction could result in serious injury or death. The following instructions are intended as a quick guide for using your Home Charging Dock and are not intended to be a substitute for reading and following each instruction in the User's Manual.






Press the button on the connector to release it from the charging dock.





Unwrap the cable from around the cable hanger.



Insert connector firmly into the vehicle charge port. When fully inserted, the VEHICLE CONNECTED light on the charging dock will illuminate.






Charging will begin automatically. When charging begins, the VEHICLE CHARGING light will start to blink. There is no need to press START.



Charging will stop automatically when complete. Or, you can manually stop charging by pressing STOP. In either case, when the READY TO CHARGE light blinks, remove the connector from the vehicle charge port. If you manually paused charging by pressing STOP, you can press START to resume charging.



When the VEHICLE CHARGING light stops blinking on the charger, press the button on the connector to release. Pull to remove from vehicle charge port.



Remove the connector from the vehicle. Rewrap the charging cable around the cable hanger, and insert the Connector into the charging dock for storage.

WARNING: Failure to rewrap cable could result in tripping or strangulation hazard.



Charge Smarter. Drive Farther.™

For assistance, call Customer Support at (888) 833-2148.



Before charging...

Is the 'POWER PRESENT' light on?

Is the 'READY TO CHARGE' light on?

Is the 'TROUBLE' light off?

