


7601-143-300SQ-CYL Symmons® Shower System

Symmons Pressure-Balancing mixing valve with lever handle and adjustable stop screw to limit handle turn. Euro-Flo three mode shower head with arm and square flange. **This product will be a custom design. Product subject to change.**

Modifications:

Suffix X: Integral service stops—allows water shut-off at valve for service

Suffix 2.0: 2.0 gpm (7.6 L/min) flow restrictor

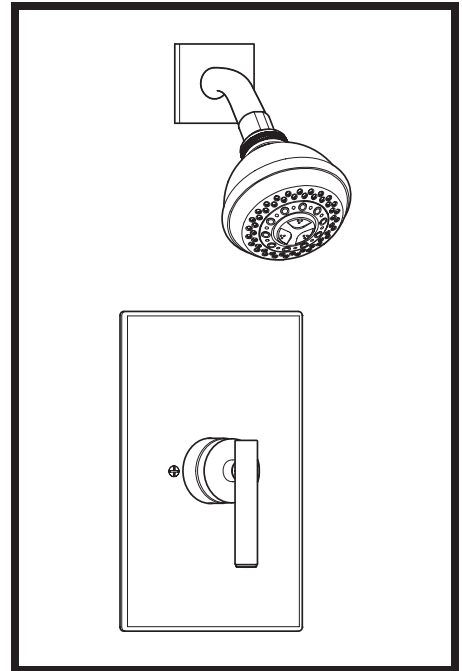

**SYMMONS PRODUCTS MEET
ANSI A112.18.1M, EPA '92
AND ALL KNOWN FLOW RATE
REQUIREMENTS.
Shower Heads and Hand Showers
2.5 GPM (9.5 L/min)**

Job/Location

.....
.....

Engineer

.....
.....

Contractor

.....
.....

This drawing to be used for rough-in installation only. All floor to center dimensions optional. Concealed piping and fittings not furnished by manufacturer. For ADA compliance (Americans with Disabilities Act) consult ADAAG or your state regulations for proper product choice and mounting locations. For complete installation, adjustment and service information see installation instructions.

Symmons Industries, Inc. ■ 31 Brooks Drive ■ Braintree, MA 02184
(800) 796-6667, (781) 848-2250 ■ Fax (800) 961-9621, (781) 843-3849
Website: www.symmons.com ■ Email: customerservice@symmons.com

