



Installation Instructions AQ-4000 Countertop Water Filter

White, Black, and Brushed Steel finishes

Contents



Filter unit with snap-on cover



Threaded cartridge caps
(A & B) and "O" rings
pre-installed in filter unit



Filter cartridges (A & B) preinstalled in filter unit (Model no. AQ-4035)



Faucet diverter valve and hose assembly



Brass faucet adapters (2 sizes), rubber washers* and install tool (not included in or covered by the system certification)

Model: AQ-4000

Replacement cartridge: AQ-4035

Rated service flow: 0.5 gpm

Max working pressure: 80 psi (5.62 kg/cm)

Min working pressure: 20 psi (1.40 kg/cm)

Max operating temp: 90° F (32.2° C) Min operating temp: 40° F (4.44° C)

Max capacity: 450 gallons



System tested and certified by NSF International against NSF/ANSI Standard 42 and 53 for the reduction of the claims specified on the Performance Data Sheet and at www.nsf.org.

Do not use with water that is microbiologically unsafe or of unknown water quality without adequate disinfection before or after the system. Systems certified for cyst reduction may be used on disinfected waters that may contain filterable cysts.



The AQ-4000 is available in three finishes.


Stop! Does your faucet have a pullout sprayer?

Unfortunately, Aquasana drinking water filters do not fit on these faucets. In order to have filtered water in your home, please consider our Under Counter filter with a faucet that matches your decor!





AQ-4000 in white finish

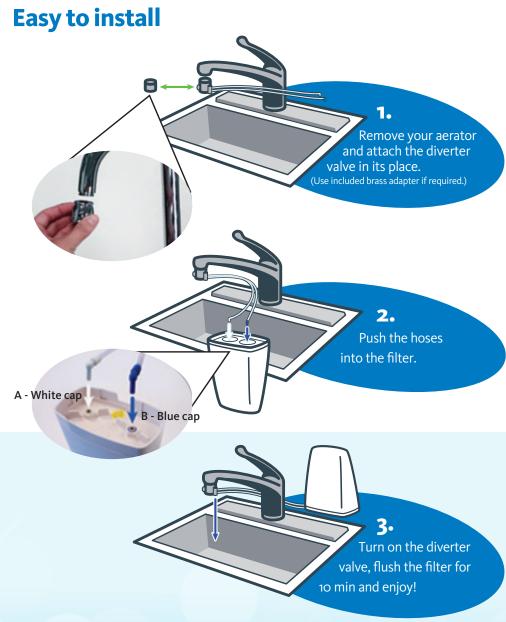

For the first 72 hours, the faucet diverter valve will drip intermittently, until the filters become fully saturated. Once they are saturated you should anticipate a residual flow of water each time you use the filter, as the system is vented and designed to clear the line.

Operating

Your filter comes pre-assembled with cartridges you won't need to change for six months, or 450 gallons.



Turn on cold water.


Pull pin on diverter valve for clean water. Turn water off when done. If pull pin does not retract, push pin in once water is off.



Precautions:

Aquasana is not liable for consequential or incidental damages due to improper installation.

- Filter is only to be used with cold water.
- Never use this system on constant-pressure applications such as ice makers or drinking fountains.
- If the faucet diverter valve does not fit, you will need to install one of the brass faucet adapters before attaching it. The brass faucet adapters can be tightened using the install tool. (if the supplied brass faucet adapters do not fit you can obtain the right size from your local hardware store. Be sure to bring your aerator and diverter valve to find the perfect match.)
- Make sure the rubber washer is in place inside the chrome swivel collar on the diverter valve.
- If you experience a leak at the hose connection, disconnect and re-seat the hose.
- Installation must comply with state and local laws.
- * Supplied brass faucet adapters and seals are not included in or covered by the system certification.

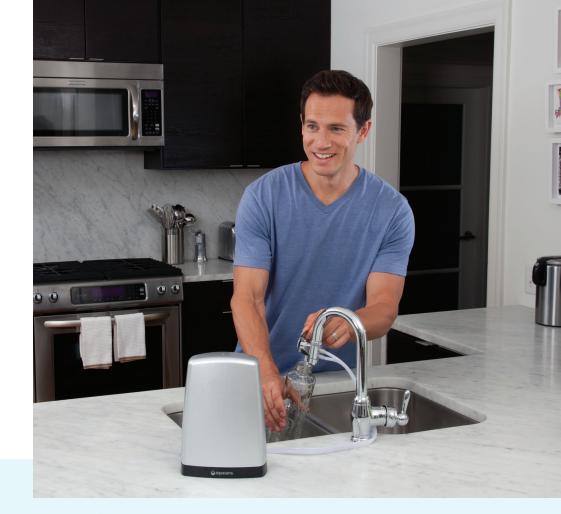

Pure Satisfaction

All Aquasana products offer a 90-day 100% satisfaction guarantee. (A 1-year warranty is included, which covers defects in materials and workmanship.) If for any reason you are not satisfied with your purchase, simply call us, or the dealer you purchased from, for a Return Authorization Code and a full refund will be promptly issued upon return. Thank you for choosing Aquasana!

Don't Void Your Warranty:

This filter system is designed and tested for use with genuine Aquasana parts including replacement filters and all hardware (diverter valve). Use of parts from other manufacturers may result in loss of contaminant reduction performance, system damage or failure. Use of parts from other manufacturers will also void your warranty. Please visit aquasana.com for all replacement parts.



Aquasana, Inc.

6310 Midway Road Haltom City, TX 76117 866.662.6885 USA 877.332.7873 Canada aquasana.com



For exclusive deals



