

Maxx Cold X-series | The Legacy Companies 3355 Enterprise Avenue, Suite 160, Fort Lauderdale, FL 33331 (954) 202-7419 • Fax (954) 202-7337 • (877) 600-8401 www.MaxximumFoodService.com • Info@MaxxColdFoodService.com

Project Name:	
Location:	
[tem #:	Qty:
Model:	

Countertop Glass Door Merchandisers are designed for durability and visual appeal in promoting your product. Glass door merchandisers are energy efficient and effective at keeping product at exactly the right temperature. This keeps food fresher for longer. The simple-touse but precise digital controls allows for accuracy in temperature and

• Perimeter magnetic compression gaskets contribute to the unit's operating efficiency and are readily replaced without tools.

Hinged Door Models: Self-closing, magnetic gasket.

Internal hidden bottom mounted compressor

Adjustable feet for uneven flooring.

Multi pane glass glass doors enhance energy efficiency by preventing heat loss and minimizing condensation

Manual defrost cycle maintains ideal storage conditions. Digital Temperature display can be recessed in top of unit or raised for easy viewing. Temperature reading visible from up to

Internal condensate evaporate pan included. No drain connection

Foamed urethane insulation is used to minimize heat loss and improve the unit's temperature regulation, resulting in cost

COUNTERTOP MERCHANDISERS | REFRIGERATORS

Model:

MXM1-2F

MXM1-2.5R

MXM1-3.5R

MXM1-4R

flexible use of the unit.

FEATURES

Door locks

15 feet away.

Interior LED lighting

MXM1-2RB

MXM1-3.5RB



MXM1-2R MXM1-2RB (Color: Black)



MXM1-2.5R



MXM1-3.5R MXM1-3.5RB (Color: Black)



MXM1-4R



TEMPERATURE

CONSTRUCTION

effective performance.

Holding temperature: 32° to 40°F (0° to 4°C)

Exterior Material: White painted steel.

Digitally controlled system maintains optimum temperature

Interior Material: ABS. Easy to clean, low maintenance.

Heavy-duty, PE (polyethylene) coated wire shelves.

• MXM1-2R/RB and MXM1-2.5R: (2) shelves

• MXM1-3.5R/RB and MXM1-4R: (3) shelves

REFRIGERANT

CFC & HCFC free R-134A

ELECTRIC

Certified to

Single Door: 115/60Hz/1 Ph (NEMA 5-15)



Certified to ANSI UL 471 Compliant



Compliant

Maxx Cold X-Series WARRANTY (USA / CANADA)

One (1) year parts

One (1) year on-site labor

Four (4) years compressor (part only)


Administered by The Legacy Companies, 877.368.2797

ANSI-NSF 7 Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.



Maxx Cold X-series | The Legacy Companies 3355 Enterprise Avenue, Suite 160, Fort Lauderdale, FL 33331 (954) 202-7419 • Fax (954) 202-7337 • (877) 600-8401 www.MaxximumFoodService.com • Info@MaxxColdFoodService.com

COUNTERTOP MERCHANDISERS | REFRIGERATORS

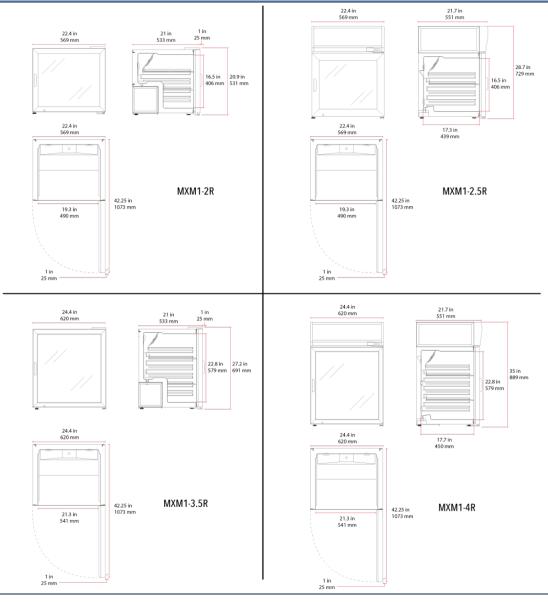

	MXM1-2R/RB	MXM1-2.5R	MXM1-3.5R/RB	MXM1-4R
In: External Dimensions W x D X H	22.3 x 21 x 20.9	22.3 x 21.7 x 28.7	24.3 x 21.4 x 27.2	24.3 x 22 x 35
mm: External Dimensions W x D X H	570 x 533 x 530	570 x 550 x 730	620 x 543 x 691	620 x 560 x 890
Nominal Capacity	2.1 Cu Ft / 59.5 L	2.6 Cu Ft / 73.5 L	3.5 Cu Ft / 102 L	4.2 Cu Ft / 119 L
Doors	1	1	1	1
Shelves	(2) shelves	(2) shelves	(3) shelves	(3) shelves
Unit Weight	94.8 lb / 43 kg	106.3 lb / 48 kg	117 lb / 53 kg	129 lb / 59 kg

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice.

While we exercise good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications.

By using the information provided, the user assumes all risks in connection with such use.