

Features

- Integral flange.
- Left drain.
- Slotted overflow for deep soaking.
- Integral apron.
- Integral lumbar support.
- Textured bottom surface.
- 60" (1524 mm) x 30" (762 mm) x 21" (533 mm)

Material

Acrylic

Installation

- Alcove
- Above-the-floor drain installation.

Required Accessories

K-7271 Brass Slotted Overflow Bath Drain or

K-7272 PVC Slotted Overflow Bath Drain



Codes/Standards

CSA B45.5/IAPMO Z124 ASTM E162 ASTM E662 Greenguard UL 2818 - Gold

KOHLER[®] One-Year Limited Warranty


See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

| Color | Code | Description |
|-------|------|---------------|
| | 0 | White |
| | 96 | Biscuit |
| | 47 | Almond |
| | NY | Dune |
| | 95 | lce™ Grey |
| | G9 | Sandbar |
| | K4 | Cashmere |
| | 58 | Thunder™ Grey |
| | | |

7 Black Black™














Underscore® Rectangle 5' Bath K-1956-LA

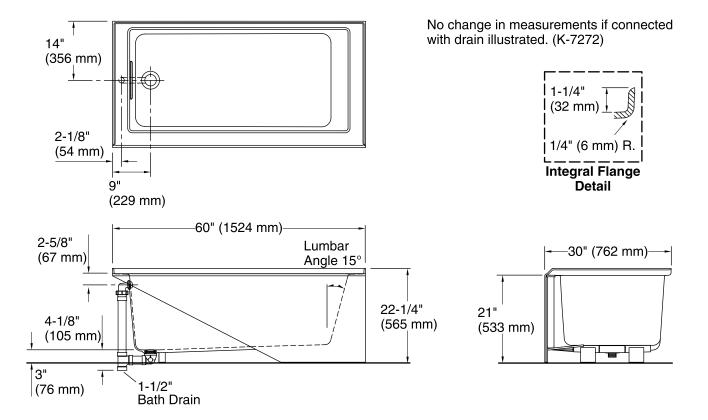

Technical Information

| All product dimensions are nominal. | | | |
|-------------------------------------|--|--|--|
| 3-Wall Alcove | | | |
| Left | | | |
| 46-1/4" x 22" (1175 mm x 559 mm) | | | |
| 52" x 24" (1321 mm x 610 mm) | | | |
| 105 lbs (47.6 kg) | | | |
| 56 lbs/ft² (273.4 kg/m²) | | | |
| 15-1/2" (394 mm) | | | |
| 68 gal (257.4 L) | | | |
| 2-3/4" (70 mm) | | | |
| | | | |

Notes

Measure your actual product for rough-in details. Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

