

Dustless[®]
TECHNOLOGIES

DUST SHROUD PRO

OWNERS MANUAL

IN THE BOX



Dustless[®]
TECHNOLOGIES

★ PROUDLY MADE IN THE USA ★

LIVE CUSTOMER SUPPORT & SERVICES:

1.800.568.3949 Toll-free in the U.S.

dustlesstools.com

PATENT NO. 8137165 & WO 2009/091800



SETUP

1. Loosen Clamp.



2. Place on collar of grinder.



3. Center Dust Shroud on arbor and tighten clamp.



4. Install spacer if needed.




5. Install grinding wheel.



6. Insert hose in Dust Shroud Pro port.



7. Attach to vacuum.

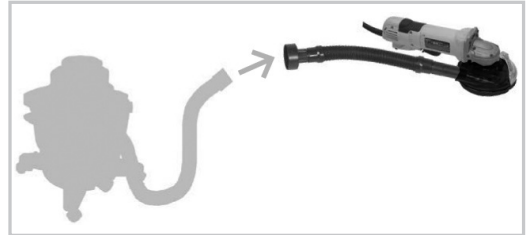

USAGE

Front clip slides out so you can use it against a wall. Note: Always make sure grinder is UNPLUGGED when removing or attaching clip.



Dust Shroud Pro comes with a clip mount (7" only).



WARNING - If using this product in the removal of lead paint a Dustless HEPA vacuum must be used. The removal of old paint may generate dust or fumes that contain lead. Exposure to lead may cause brain damage or other adverse health effects, especially in young children and pregnant women. Follow all federal, state and local laws including the U.S. Environmental Protection Agency's Renovation, Repair and Painting law or similar state law.

SUPPORT

www.dustlesstools.com