

PWASH35

3.5 Gallon Parts Washer

Assembly & Operating Instructions



READ ALL INSTRUCTIONS AND WARNINGS BEFORE USING THIS PRODUCT.

This manual provides important information on proper operation and maintenance. Every effort has been made to ensure the accuracy of this manual. We reserve the right to change this product at any time without prior notice.


STOP! DO NOT RETURN THIS PRODUCT TO THE RETAILER.

Questions? Problems? CONTACT BUFFALO TOOLS.

If you experience a problem or need parts for this product, visit our website <http://www.buffalotools.com> or call our customer help line at **1-800-568-6657, Monday-Friday, 8 AM - 4 PM Central Time**. A copy of the sales receipt is required.

3.5 Gallon Parts Washer PWASH35 Assembly and Operating Instructions

COMMON SENSE AND CAUTION ARE FACTORS WHICH CANNOT BE BUILT INTO ANY PRODUCT. THESE FACTORS MUST BE SUPPLIED BY THE OPERATOR.

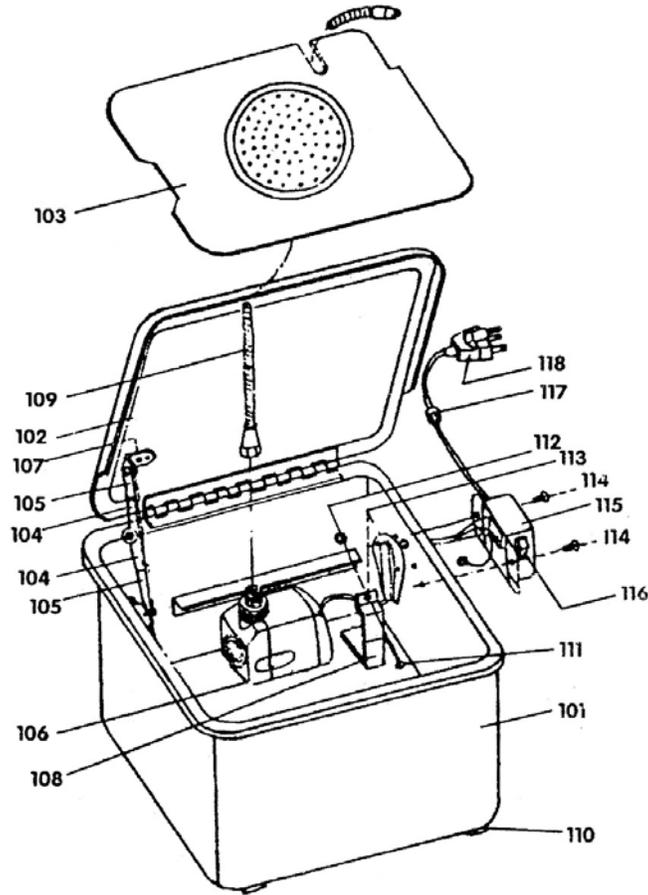

Parts List

ITEM	QTY	DESCRIPTION	ITEM	QTY	DESCRIPTION
101	1	TANK	110	4	PLASTIC PLATE
102	1	LID	111	1	M5X30 SCREW
103	1	REMOVABLE SHELF	112	1	M5 NUT
104	2	LINKED LID ARM	113	1	COVER
105	2	SAFETY PLATE	114	3	M4X12 SCREW
106	1	PUMP	115	1	HANDLE
107	1	RIVET	116	1	LIGHT SWITCH
108	1	PUMP HOLDER	117	1	STRAIN RELIEF
109	1	FLEXIBLE METAL SPIGOT	118	1	POWER CORD

3.5 Gallon Parts Washer PWASH35 Assembly and Operating Instructions

5 Gallon Tank Capacity / 3.5 Gallon Solvent Capacity

Black Powder Coat Paint Finish / Heavy-Duty Steel Construction

120 Volts / 60 Hz Water Pump

Fusible Link Arm & Steel Lid

Max. Pump Output: 22 GPH flow rate (with flexible pipe)

Max. Pump Output: 210 GPH flow rate (without flexible pipe)

Recirculates .3 GPM of Solvent

Removable Shelf With Drainage Holes Keeps Parts Out Of Solvent During Inspection and Drying.

Flexible Chrome Plated Nozzle Adjusts For Full Coverage

WARNING Read carefully before operating.

1. Do not over fill solvent. Fill to just below level of parts tray.
2. Do not use any solvent with a flashpoint below 150° F.
3. Only use petroleum or biodegradable based solvents that are approved for electric parts washers.
4. Use only in a well ventilated area.
5. Do not operate while smoking
6. Do not operate near heat sources such as heaters, sparks, open flame, etc.
7. Should fire occur in parts washer do not attempt to move parts washer
8. Lid is on a fusible link and will fall automatically to extinguish flame.
9. Do not modify or jam lid to keep lid locked in an open position.
10. Replace damaged parts immediately.
11. Use only on grounded 115Volt, 60Hz, outlet.

