


PARAMETER	FREQUENCY		
	RANGE (MHz)	TYP (dB)	QC (dB)
INSERTION LOSS (IN-OUT)	5-47	3.5	3.6
	47-470	3.5	3.6
	470-862	3.7	3.8
	862-1000	3.9	4.0
ISOLATION (OUT-OUT)	5-47	23	22
	47-470	27	25
	470-862	26	25
	862-1000	25	24
RETURN LOSS (IN)	5-47	21	20
	47-470	23	22
	470-862	23	22
	862-1000	21	20
RETURN LOSS (OUT)	5-47	21	20
	47-470	23	22
	470-862	23	22
	862-1000	21	20

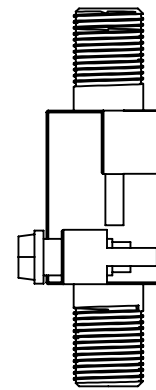

NOTES:

1. PRIMARY DIMENSIONS ARE IN mm.
2. SECONDARY DIMENSIONS ARE IN in.
3. BACK COVER IS SOLDERED ON (EMI-RFI > -120dB).
4. FREQUENCY RANGE: 5 - 1000 MHz.

			TITLE: 2-WAY DIGITAL CABLE SPLITTER			
			P/N: 85-132			
			MAT'L: ZINC CASE			
DO NOT SCALE DRAWING			TOLERANCES UNLESS OTHERWISE SPECIFIED DIMENSIONS ON THIS PRINT ARE FOR REFERENCE ONLY.		PART VOLUME <b>N/A</b>	
			FINISH: NICKEL PLATING			
SCALE: 1:1		DRW. BY: RWS		CKDBY: RWS		APP. BY: RWS
DATE: 3-21-13			DRWG. NO. CD-85-132			



**IDEAL INDUSTRIES, INC.**  
SYCAMORE, ILLINOIS, U.S.A.