

Hyperikons® Ceiling Fan is a fine addition to every room in your living area. This fan comes with features such as riversible directions, great airflow efficiency, three mounting options, and our signature 5-year warranty.



110V



::: 0

Remote

Controlled



Shell



Fan Width

42"-52"



Wooden Blades

- Two-way rotation function.
- The ceiling fan uses two E26 base bulbs (bulbs are not included).
- Suitable for large indoor areas 20' x 20' or less.



- (888) 846-4973 C
- info@hyperikon.com
- 0 707 Broadway Suite 800
- San Diego, CA 92101
- www.hyperikon.com


HyperFan42-DXX - FDRA420X HyperFan52-DXX - FDRA520X

CEILING FAN WITH DOME LIGHT

SPECIFICATIONS

Model Name	SKU	Wattage	Airflow	Airflow Efficacy	Motor Performance	Color
HyperFan42-DWH	FDRA4201	44W	2785 CFM	63 CFM/W	210 RPM	White
HyperFan42-DBL	FDRA4202	44W	2785 CFM	63 CFM/W	210 RPM	Black
HyperFan42-DBR	FDRA4203	44W	2785 CFM	63 CFM/W	210 RPM	Brown
HyperFan42-DBN	FDRA4204	44W	2785 CFM	63 CFM/W	210 RPM	Brushed
						Nickel
HyperFan52-DWH	FDRA5201	62W	4450 CFM	72 CFM/W	180 RPM	White
HyperFan52-DBL	FDRA5202	62W	4450 CFM	72 CFM/W	180 RPM	Black
HyperFan52-DBR	FDRA5203	62W	4450 CFM	72 CFM/W	180 RPM	Brown
HyperFan52-DBN	FDRA5204	62W	4450 CFM	72 CFM/W	180 RPM	Brushed
						Nickel

MODEL DESIGN

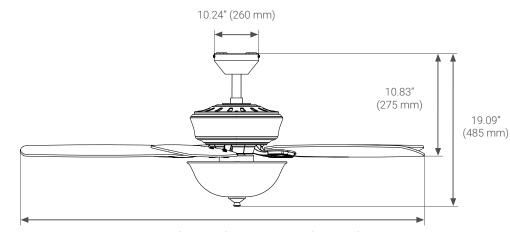

FBPA420X 42" (1067 mm) / FBPA520X 52" (1321 mm)

Mounting Options







Brushed Nickel

WARNINGS AND CAUTIONS

- Blade tips should be at least 18 inches from any wall.
- This device is not intended for use with emergency exit fixtures or emergency exit lights. •
- This fan may be either directly supported from a structural framing member of a building and/or . may be mounted to an outlet box marked acceptable for fan support of 15 lbs (6.9 kg) or less.



