

FEATURES & SPECIFICATIONS

INTENDED USE

Allows for indoor gardening year-round. Fixture includes energy-efficient T5 6500K fluorescent bulbs that produce light comparable to natural sunlight. The fixture can be chain mounted or flush mounted. Includes a 5 ft. cord-and-plug, on/off rocker switch, and a convenience outlet for linking multiple fixtures.

CONSTRUCTION

Rugged baked white enamel post painted metal housing.

Minimum operating temperature: 0°F (-18°C).

OPTIC

Clear acrylic lens directs light downward, protects the bulbs and utilizes a zip-lock design that allows for tool-free bulb replacement. Vertical sides of the lens are opaque to reduce glare.

INSTALLATION

Includes two 48 in. chains and brackets for chain-mounted installation.


Chain mounting hardware included.

LISTINGS

cUL listed to US and Canadian safety standards.

WARRANTY — 2-year limited warranty. Complete warranty terms located at: <u>www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx</u>

Note: Actual performance may differ as a result of end-user environment and application. Specifications subject to change without notice.

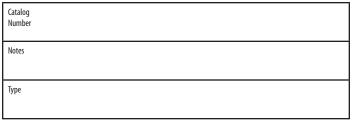

Indoor Utility

Grow Light

Example: GRW 2 14 CSW CO



L	⊣
	_ W

Dimensions

Length: 2'GRW - 23-1/8 (58.7)

4'GRW - 46-1/8 (117.2)

Width: 5-1/2 (14.0) Height: 1-1/4 (3.2)

All dimensions are inches (centimeters)

ORDERINGINFORMATION For shortest lead times, configure products using **bolded options**.

GRW		2								
Series		Number of lamps		Lamp	Lamp type		Ballast/Voltage		Options	
GRW	Grow light	2	Two lamps	14 28	14W T5 6500K 28W T5 6500K	(blank)	120 volt residential electronic ballast (standard)	CSW CO	5' white cord-and-plug Convenience outlet	

DECORATIVE INDOOR & OUTDOOR GRW

Grow Light

PHOTOMETRICS

Full photometric data report available within 2 weeks from request. Consult factory.

