



PARAMETER	FREQUENCY	TYP (dB)	QC (dB)
	RANGE (MHz)		
INSERTION LOSS (IN-OUT)	5-47	3.5 / 6.9	3.6 / 7.0
	47-470	3.8 / 7.4	3.9 / 7.5
	470-862	3.9 / 7.4	4.0 / 7.5
	862-1000	4.1 / 8.1	4.2 / 8.2
ISOLATION (OUT-OUT)	5-47	23	22
	47-470	26	25
	470-862	26	25
	862-1000	25	24
RETURN LOSS (IN)	5-47	21	20
	47-470	23	22
	470-862	23	22
	862-1000	21	20
RETURN LOSS (OUT)	5-47	21	20
	47-470	23	22
	470-862	23	22
	862-1000	21	20

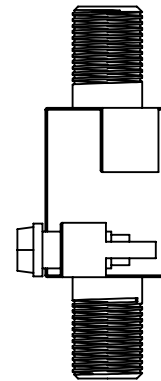

- NOTES:
1. PRIMARY DIMENSIONS ARE IN mm.
  2. SECONDARY DIMENSIONS ARE IN in.
  3. BACK COVER IS SOLDERED ON (EMI-RFI > -120dB).
  4. FREQUENCY RANGE: 5 - 1000MHz.

				TITLE: 3-WAY DIGITAL CABLE SPLITTER			
				P/N: 85-133			
				MAT'L: ZINC CASE			
DO NOT SCALE DRAWING		TOLERANCES UNLESS OTHERWISE SPECIFIED DIMENSIONS ON THIS PRINT ARE FOR REFERENCE ONLY.		PART VOLUME <b>N/A</b>		FINISH: NICKEL PLATING	
				SCALE: 1:1	DRW. BY: RWS	CKDBY: RWS	APP. BY: RWS
 <b>IDEAL INDUSTRIES, INC.</b> SYCAMORE, ILLINOIS, U.S.A.				DATE 3-26-13		DRWG. NO. CD-85-133	