

List updated August 4, 2015
For the most up-to-date list, visit
www.lutron.com/dimcflled

Dimmable CFL & LED bulbs

Compatible with Lutron 100W & 150W C-L® dimmers



Dimmable CFL & LED bulbs

Compatible with C·L® dimmers

List updated August 4, 2015
For the most up-to-date list, visit
www.lutron.com/dimcflled

This list is designed to help you select bulbs that are compatible with Lutron C·L dimmers. The CFL and LED bulbs on this list were extensively tested by Lutron; the Lutron C·L dimmers were evaluated by UL and meet applicable safety standards.

How to use this list

If you already have a bulb:

Use the “Find” tool in your browser or PDF viewer to search for the model number that’s printed on the bulb. Then choose a C·L dimmer that’s compatible with that bulb.

If you already have a C·L dimmer:

Use the table of contents to find the corresponding pages for that control, and then select a bulb from that list.

What does “compatible” mean?

Compatible means that the bulbs can be dimmed, although the bulb’s dimming performance may not match what you’re used to seeing when dimming an incandescent or halogen bulb. These bulbs have also been electrically tested to confirm that the control may be used up to its full rated CFL/LED load without affecting the life of the control.

Products on this list are considered compatible with the respective Lutron C·L dimmers. Depending on the quality of the bulb you select, compatible bulbs may still:

- have less dimming range than an incandescent or halogen bulb
- dim less smoothly than an incandescent or halogen bulb
- flicker or shimmer at certain light levels
- buzz

Dimmable CFL & LED bulbs

Compatible with C•L® dimmers

List updated August 4, 2015
For the most up-to-date list, visit
www.lutron.com/dimcflled

For more information














If you'd like more information regarding bulb performance and test results, including dimming range, other dimmer options, and performance, please visit www.lutron.com/ledtool.

Warranty on your Lutron 100W C•L dimmer or 150W C•L dimmer will be void if used with bulbs that are not on this Lutron compatible bulb list.

Please note: Bulb variations in lamp design and construction affect performance. Bulb manufacturers can modify their bulbs at any time, without notice to Lutron. This prevents Lutron from ensuring ongoing compatibility. For up-to-date specifications, performance, and/or any related recall information about the bulb, please visit the bulb manufacturer's website.

This document provides information from manufacturers who are not Lutron agents or affiliates. The listing of a manufacturer or the existence of any external link to another website does not suggest that Lutron is endorsing the linked company, its products and/or its services. Purchasers should ask appropriate questions and request references before buying any products and/or entering a contract with any party. The information contained in this document is intended for illustrative and comparative purposes only, and is subject to change at any time. Lutron does not warrant that (a) the list of manufacturers is all-inclusive; (b) the information is complete, up-to-date, accurate and/or error-free; (c) the products and Lutron controls listed will always be compatible; and (d) that the information provided will be a viable or appropriate solution for your project needs. You are entirely responsible for and assume all risk for the use of the information.

Table of Contents

Maestro[®] occupancy sensor C•L dimmers		
• LED Bulbs.....	page 2-11	
• CFL Bulbs.....	page 12	
Maestro[®] C•L dimmers		
• LED Bulbs.....	page 13-23	
• CFL Bulbs.....	page 24	
Diva[®] 150W C•L dimmers*		
• LED Bulbs.....	page 25-35	
• CFL Bulbs.....	page 36	
<small>For the Diva 250W C•L dimmer (DVCL-253P-XX, DVSCCL-253P-YY), please click here</small>		
Skylark Contour[®] C•L dimmers*		
• LED Bulbs.....	page 25-35	
• CFL Bulbs.....	page 36	
Skylark[®] C•L dimmers		
• LED Bulbs.....	page 25-35	
• CFL Bulbs.....	page 36	
Lumea[®] C•L dimmers*		
• LED Bulbs.....	page 25-35	
• CFL Bulbs.....	page 36	
Toggler[®]/Ariadni[®] 150W C•L dimmers*		
• LED Bulbs.....	page 25-35	
• CFL Bulbs.....	page 36	
<small>For the Ariadni 250W C•L dimmer (AYCL-253P-XX), please click here</small>		
Credenza[®] C•L dimmers		
• LED Bulbs.....	page 37-38	
• CFL Bulbs.....	page 39	
Maestro Wireless[®] C•L dimmers		
• LED Bulbs.....	page 40-44	
• CFL Bulbs.....	page 45	
Caséta[®] Wireless C•L in-wall dimmers		
• LED Bulbs.....	page 46-50	
• CFL Bulbs.....	page 51	
Caséta[®] Wireless C•L plug-in dimmers		
• LED Bulbs.....	page 52-53	
• CFL Bulbs.....	page 54	
Caséta[®] Pro Wireless C•L dimmers		
• LED Bulbs.....	page 55-58	
• CFL Bulbs.....	page 59	
Diva[®] and Ariadni[®] 250W C•L dimmers		
• LED Bulbs.....	page 60-68	
• CFL Bulbs.....	page 69	

*** Please Note:**

If your Ariadni/Diva/Lumea/Skylark Contour/Toggler C•L dimmer has a dial on it to adjust the low-end trim (see page 70) and if you purchased your C•L dimmer before 2013 then please refer to the dimmer-bulb compatibility list available here:

[Archive C•L Bulb List](#)

† Requires a minimum of 2 lamps
 †† Requires a minimum of 3 lamps
 © Lutron Electronics Co., Inc. | PN 368-3266J

Dimmable CFL & LED bulbs

Compatible with C•L® dimmers

List Updated August 4, 2015
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Maestro® occupancy sensor C•L dimmers

Maestro Occupancy Sensor C•L: MSCL-OP153M, MSCL-VP153M

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description	
Commercial Electric	12W	CER6730Axx	Downlight, 670 Lumen, E26 retro fit kit	
	12.5W	CE-JB4-600L-27K (T47)	4" Downlight, 600 Lumen, Soft White, 2700K	
	12.5W	CE-JB6-650L-27K (T67)	6" Downlight, 650 Lumen, Soft White, 2700K	
Cree	6W	BA19-04527OMF-12DE26-1U100	A19, Warm Soft White, 2700K, 450 Lumen, Medium base	
	6W	BA19-04527OMF-12DE26-2U100	A19, Warm Soft White, 2700K, 450 Lumen, Medium base	
	6W	BA19-04527OMF-12DE26-3U100	A19 4Flow, 2700K, 460 Lumen, E26	
	6W	BA19-04550OMF-12DE26-2U500	A19, 5000K, 450 Lumen, 40WE, 4pk	
	6W	BA19-04550OMF-12DE26-3U100	A19 4Flow, 5000K, 460 Lumen, E26	
	9.5W	BA19-08027OMF-12DE26-1U100	A19, Soft White, 2700K, 800 Lumen, Medium base	
	9.5W	BA19-08027OMF-12DE26-2U500	A19, 2700K, 800 Lumen, E26, 60WE, 4pk	
	9.5W	BBR30-06527FLF-12DE26-1U100	BR30, 650 Lumen, Soft White, 2700K	
	9.5W	BBR30-06550FLF-12DE26-1U100	BR30, Daylight, 5000K 650 Lumen, 9.5W	
	9.5W	CR4-575L	4" Downlight, 2700K, 575 Lumen, Medium Base	
	9.5W	CR6-575L	6" Downlight, 2700K, Medium Base	
	9.5W	CR6-575L-GU24	6" Downlight, 2700K, GU24 Base	
	9.5W	H1CR6TW62527E04	6" Downlight, 2700K, 625 Lumen	
	12.5W	DRDL6-06227009-12DE26-1C100	6" Downlight, 2700K TW, 625 Lumen, E26 retrofit	
	12.5W	DRDL6-06250009-12DE26-1C100	6" Downlight, 5000K TW, 625 Lumen, E26 retrofit	
	18W	BA21-16027OMF-12DE26-1U100	A21, 2700K, 1600 Lumen, E26, 18W	
	18W	BA21-16050OMF-12DE26-1U100	A21, 5000K, 1600 Lumen, E26, 18W	
	18W	BPAR38-1503027T-12DE26-1U100	PAR38, 3000K, 1500 Lumen, 27 deg spot	
	18W	BPAR38-1503047T-12DE26-1U100	PAR38, 3000K, 1500 Lumen, 47 deg flood	
	EcoSmart	6W	ECS GP19 WW 40WE 120 [†]	A19, 3000K
		7W	ECS BR20 50WE CW 120 G1 BL	BR20, Daylight, 5000K, 525 Lumen, E26
7.5W		BPA15/CL/500/LED/ESM	A15, Soft White, 2700K, 500 Lumen, E26	
7.5W		BPA15C/CL500/LED/ESM	A15, Soft White, 2700K, 500 Lumen, E12	
7.5W		BPCFC/500/LED/ESM	B10, Soft White, 2700K, 500 Lumen, E12	
7.5W		BPEFC/500/LED/ESM	B10, Soft White, 2700K, 500 Lumen, E26	
7.5W		BPGM/CL/500/LED/ESM	G16.5, Soft White, 2700K, 500 Lumen, E26	
8W		ECS 19 CW 120 [†]	A19, Cool White, 5000K	
8W		ECS 19 WW 120 [†]	A19, Warm White, 3000K	
8W		ECS 20 CW FL 120	PAR20, Daylight, 5000K, 490 Lumen	
8W		ECS 20 CW FL 50WE 120 [†]	PAR20, 5000K, 490 Lumen	
8W		ECS 20 WW FL 120	PAR20, Warm White, 3000K	
8W		ECS 20 WW FL 50WE 120 [†]	PAR20, 3000K, 450 Lumen	
8W		ECS 25 WW 120	G25, Warm White, 3000K	
8W		ECS A19 CW 40WE 120 [†]	A19, 5000K, 480 Lumen	
8W		ECS A19 V1 CW 120	A19, Daylight, 5000K	
8W		ECS A19 V1 WW 120	A19, Warm White, 3000K	
8W		ECS A19 WW 40WE 120 [†]	A19, 3000K, 450 Lumen	
8W		ECS BR20 50WE CW 120 DG [†]	BR20, Daylight, 5000K, 600 Lumen, E26	
8W		ECS BR20 50WE W27 120	BR20, Soft White, 2700K	
8W		ECS BR20 50WE WW 120 DG [†]	BR20, Warm White, 3000K, 550 Lumen, E26	
9.5W		ECO4-575L	4" Downlight, 2700K, 575 Lumen, Medium Base	
9.5W		ECO4-575L-50K	4" Downlight, 5000K, 575 Lumen, Medium Base	
9.5W		ECO4-575L-50K-GU24	4" Downlight, 5000K, GU24 Base	
9.5W		ECO-575L	6" Downlight, 2700K, Medium Base	
9.5W		ECO-575L-50K	6" Downlight, 5000K, Medium Base	
9.5W		ECO-575L-50K-GU24	6" Downlight, 5000K, GU24 Base	
9.5W		ECO-575L-GU24	6" Downlight, 2700K, GU24 Base	
9.5W		ECS DN4 CW E26 120	4" Downlight, Daylight, 5000K, 650 Lumen, E26, retrofit	
9.5W		ECS DN4 CW GU24 120	4" Downlight, Daylight, 5000K, 650 Lumen, Gu24 base, retrofit	
9.5W		ECS DN4 W27 E26 120	4" Downlight, Soft White, 2700K, 650 Lumen, E26 retrofit	
9.5W		ECS DN4 W27 GU24 120	4" Downlight, Soft White, 2700K, 650 Lumen, GU24 base, retrofit	
9.5W	ECS DN6 CW GU24 120	6" Downlight, Daylight, 5000K, 650 Lumen, Gu24 base, retrofit		
9.5W	ECS DN6 W27 GU24 120	6" Downlight, Soft White, 2700K, 650 Lumen, GU24 base, retrofit		

† Requires a minimum of 2 lamps

†† Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266J

Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated August 4, 2015
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Maestro[®] occupancy sensor C•L dimmers

Maestro Occupancy Sensor C•L: MSCL-OP153M, MSCL-VP153M

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description
EcoSmart	10W	ECS BR30 65WE CW 120 DG	BR30, Daylight, 5000K, 700 Lumen, E26
	10W	ECS BR30 65WE CW 120 DG 3PK	BR30, Daylight, 5000K, 700 Lumen, E26, 3pk
	10W	ECS BR30 65WE W27 120 DG	BR30, Soft White, 2700K, 650 Lumen, E26
	10W	ECS BR30 65WE W27 120 DG 3BX	BR30, Soft White, 2700K, 650 Lumen, E26, 3pk
	10W	ECS BR30 65WE WW 120 DG	BR30, Warm White, 3000K, 650 Lumen, E26
	10.5W	ECS 30 75WE WW GB FL 120	PAR30 Gimbal, 3000K, 750 Lumen, E26, 75WE
	10.5W	ECS 30 75WE xxx GB xx 120	PAR30 Gimbal, Various color temperatures, 75WE
	11W	ECS RFK6 65WE W27 120 REC [†]	Downlight, Soft White, 2700K, 600 Lumen, E26
	11.5W	ECS BR30 65WE CW 120 [†]	BR30, 5000K, Medium Base
	11.5W	ECS BR30 65WE W27 120 [†]	BR30, 2700K, 650 Lumen, Medium Base
	12W	ECS A19 CW 60WE 120 [†]	A19, 5000K, 850 Lumen
	12W	ECS A19 WW 60WE 120 [†]	A19, 3000K, 800 Lumen
	13W	ECS 30 CW FL 75WE 120	PAR30, 5000K, 810 Lumen
	13W	ECS 30 WW FL 75WE 120	PAR30, 3000K, 750 Lumen
	13W	ECS A19 V2 CW 120	A19, Daylight, 5000K
	13W	ECS A19 V2 WW 120	A19, Warm White, 3000K
	14W	ECS BR40 90WE CW 120 DG	BR40, Daylight, 5000K, 1050 Lumen, E26
	14W	ECS BR40 90WE W27 120 DG	BR40, 2700K, 1000 Lumen, E26
	15W	ECS 38 CW FL 90WE 120	PAR38, 5000K, 970 Lumen
	15W	ECS 38 WW FL 90WE 120	PAR38, 3000K, 900 Lumen
	15W	ECS BR30 75WE CW 120 G1 BL	BR30, Daylight, 5000K, 985 Lumen, E26
	15W	ECS BR30 75WE W27 120 G1 3PK	BR30, Soft White, 2700K, 940 Lumen, E26, 3pk
	15W	ECS BR30 75WE W27 120 G1 BL	BR30, Soft White, 2700K, 940 Lumen, E26
	15W	ECS BR30 W27 FL 120	BR30, Soft White, 2700K
	16W	ECS BR40 W27 FL 120 [†]	BR40, Soft White, 2700K
	17W	ECS 30 V2 WW FL 120	PAR30, Warm White, 3000K
	18W	ECS 38 CW FL 120 [†]	PAR38, Daylight, 5000K
18W	ECS 38 WW FL 120 [†]	PAR38, Warm White, 3000K	
24W	ECS 38 V2 WW FL 120	PAR38, Warm White, 3000K	
Energetic	17.5W	ELY17D-2BRW-VB	BR40, 2700K, 1100 Lumen
	3.5W	CFCDM/LED [†]	Candle, Flame Tip Clear, 3000K, Candelabra Base
3.5W	EFCDM/LED [†]	Candle, Flame Tip Clear, 3000K, Medium Base	
4.5W	R14DM/LED	R14, Soft White, 2700K, 300 Lumen, E26, 40WE	
4.8W	CFCDM/300/LED ^{††}	Candle, 3000K, 310 Lumen, Candelabra Base	
4.8W	EFCDM/300/LED ^{††}	Candle, 3000K, 310 Lumen, Medium Base	
6.5W	BPMR16/GU10/DM/LED [†]	MR16, GU10 base	
6.5W	MR16/GU10/DM/LED [†]	MR16, GU10 base	
6.5W	R16DM/LED	R16, Soft White, 2700K, 400 Lumen, E26, 40WE	
7.5W	PAR20DM/5K/LED	PAR20, 5000K	
7.5W	PAR20DM/LED	PAR20, 3000K	
Feit	8W	A19/DM/GU24/LED	A19, 3000K, GU24 Base
	8W	A19/DM/LED	A19, 3000K
	8W	A19/DM/LED/CAN	A19
	8W	A19/DM/LED/RP/CAN	A19
	8W	A19DM/5K/LED	A19, 5000K
	8W	BPCEA19/DM/LED	A19
	8W	BPCER20/DM/LED	R20, 2700K, 450 Lumen, E26 Medium base (70 mA smooth reflector version)
	8W	R20/927/LED	R20, 2700K
	8W	R20/930/LED	R20, 3000K
	8W	R20/950/LED	R20, 5000K,
	8W	R20DM/LEDG2/CAN	R20, 2700K
	9.5W	BPCER20/DM/LED	PAR20
	9.5W	PAR20/5K/LEDG5	PAR20, 5000K
	9.5W	PAR20/5K/LEDG5/CAN	PAR20, 5000K

[†] Requires a minimum of 2 lamps

^{††} Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266J



Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated August 4, 2015
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Maestro[®] occupancy sensor C•L dimmers

Maestro Occupancy Sensor C•L: MSCL-OP153M, MSCL-VP153M

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description
Feit	9.5W	PAR20/LEDG5	PAR20, 3000K, 450 Lumen
	9.5W	PAR20/LEDG5/CAN	PAR20
	10W	BPAG800/5K/LED	A19, 5000K
	10W	BPAG800/LED	A19, 3000K, 800 Lumen
	10W	G25/DM/LED†	G25, 3000K
	13W	BPCEBR30LED	BR30
	13.5W	A19/OM800/5K/LED	A19, 5000K, Omni Directional
	13.5W	A19/OM800/LED	A19, 3000K, Omni Directional
	13.5W	A19DM/800/LED	A19, 3000K
	13.5W	BPCEA19/OM800/LED	A19, Omni Directional
	13.5W	BPCEA19/OM800/LED/CAN	A19, Omni Directional
	14W	LEDR56/830	Downlight, 3000K, 925 Lumen, retrofit kit
	15W	BPCEPAR30/LEDG5	PAR30
	15W	PAR30L/5K/LEDG5	PAR30, 5000K
	15W	PAR30L/5K/LEDG5/CAN	PAR30, 5000K
	15W	PAR30L/LEDG5	PAR30
	15W	PAR30L/LEDG5/CAN	PAR30
	16W	A19/OM1100R/LED	A19, 3000K, 1100 Lumen, Omni Directional
	16.8W	LEDR56/3K	5" or 6" Downlight, 3000K, 840 Lumen
	17W	BPCEBR40/LED	BR40, 2700K, 1065 Lumen
	17W	BR40/DM/LED†	BR40, 2700K, 1065 Lumen
	18W	18PAR38/DM/LED	PAR38, 3000K
	18W	PAR38DM/5K/LED	PAR38, 5000K
	18W	PAR38DM/LED	PAR38, 3000K
	20W	20PAR38/LEDG5	PAR38
	20W	BPCEPAR38/LEDG5	PAR38
	20W	PAR38/5K/LEDG5	PAR38, 5000K
	20W	PAR38/5K/LEDG5/CAN	PAR38, 5000K
	20W	PAR38/LEDG5	PAR38
	20W	PAR38/LEDG5/CAN	PAR38
20.5W	LEDR56/827	5" or 6" Downlight, 2700K, 1245 Lumen	
22W	A/OM1600R/27K/LED	A21, 2700K, 1600 Lumen	
22W	A/OM1600R/5K/LED	A21, Daylight, 5000K, 1600 Lumen	
22W	A/OM1600R/LED	A21, Warm White, 3000K, 1600 Lumen	
GE	8W	LED8DA19/827	A19, 2700K, 450 Lumen, E26
	10W	LED10DP30S827/20	PAR30, 2700K, Short Neck, Silver Base
	10W	LED10DP30S830/20	PAR30, 3000K, Short Neck, Silver Base
	10W	LED10DP30W827/20	PAR30, 2700K, Short Neck, White Base
	11W	LED11DA19RVL/TP	A19, 2700K, 570 Lumen
	11W	LED11DA19V2	A19, 2700K, 800 Lumen
	12W	LED12DR30RVL/BK	BR30, Reveal
	12W	LED12DR30RVL/CDN	BR30, Reveal
	12W	LED12DR30RVL/TP	BR30, Reveal 2850K, 630 Lumen
	12W	LED12RS4RVLE26PB (95390)	Downlight, 2700K, 630 Lumen, E26
	12W	LED12RS4RVLGUPB (95391)	Downlight, 2700K, 630 Lumen, GU24
	12W	LED12RS6RVL326PB (95392)	Downlight, 2700K, 630 Lumen, E26
	12W	LED12RS6RVLGUPB (95393)	Downlight, 2700K, 630 Lumen, GU24
	18W	LED18D38W827/15	PAR38, 2700K, E26, 15° Beam
	18W	LED18D38W827/25	PAR38, 2700K, E26, 25° Beam
	18W	LED18D38W827/40	PAR38, 2700K, E26, 40° Beam
	18W	LED18D38W830/15	PAR38, 3000K, 1400 Lumen, E26, 15° Beam
	18W	LED18D38W830/25	PAR38, 3000K, 1400 Lumen, E26, 25° Beam
	18W	LED18D38W830/40	PAR38, 3000K, 1400 Lumen, E26, 40° Beam
	18W	LED18D38W927/15	PAR38, 2700K, 1100 Lumen, E26, 15° Beam
18W	LED18D38W927/25	PAR38, 2700K, 1100 Lumen, E26, 25° Beam	
18W	LED18D38W927/40	PAR38, 2700K, 1100 Lumen, E26, 40° Beam	
18W	LED18D38W930/15	PAR38, 3000K, 1200 Lumen, E26, 15° Beam	

† Requires a minimum of 2 lamps

†† Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266J

Dimmable CFL & LED bulbs

Compatible with C•L® dimmers

List Updated August 4, 2015
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Maestro® occupancy sensor C•L dimmers

Maestro Occupancy Sensor C•L: MSCL-OP153M, MSCL-VP153M

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description
GE	18W	LED18D38W930/25	PAR38, 3000K, 1200 Lumen, E26, 25° Beam
	18W	LED18D38W930/40	PAR38, 3000K, 1200 Lumen, E26, 40° Beam
Halco	20W	PAR38FL20/827/LED	PAR38, 2700K, 1150 Lumen Flood
	20W	PAR38FL20/830/LED	PAR38, 3000K, 1200 Lumen Flood
	20W	PAR38FL20/840/LED	PAR38, 4000K, 1250 Lumen Flood
	20W	PAR38FL20/850/LED	PAR38, 5000K, 1300 Lumen Flood
	20W	PAR38NFL20/827/LED	PAR38, 2700K, 1150 Lumen Flood
	20W	PAR38NFL20/830/LED	PAR38, 3000K, 1200 Lumen Flood
	20W	PAR38NFL20/840/LED	PAR38, 4000K Flood
	20W	PAR38NFL20/850/LED	PAR38, 5000K, 1300 Lumen Flood
	20W	PAR38SP20/827/LED	PAR38, 2700K, 1150 Lumen Spot
	20W	PAR38SP20/830/LED	PAR38, 3000K, 1200 Lumen Spot
	20W	PAR38SP20/840/LED	PAR38, 4000K Spot
	20W	PAR38SP20/850/LED	PAR38, 5000K, 1300 Lumen Spot
	Lighting Science	8W	DFN 19 CW 120 [†]
8W		DFN 19 NW 120 [†]	A19, Neutral White, 4000K
8W		DFN 19 W27 120 [†]	A19, Warm White, 2700K
8W		DFN 19 WW 120 [†]	A19, Warm White, 3000K
8W		DFN 20 CW FL 120	PAR20, Cool White, 5000K
8W		DFN 20 CW NFL 120	PAR20, Cool White, 5000K
8W		DFN 20 NW FL 120	PAR20, Neutral White, 4000K
8W		DFN 20 NW NFL 120	PAR20, Neutral White, 4000K
8W		DFN 20 W27 FL 120	PAR20, Warm White, 2700K
8W		DFN 20 W27 NFL 120	PAR20, Warm White, 2700K
8W		DFN 20 WW FL 120	PAR20, Warm White, 3000K
8W		DFN 20 WW NFL 120	PAR20, Warm White, 3000K
8W		DFN 25 CW 120	G25, Cool White, 5000K
8W		DFN 25 NW 120	G25, Neutral White, 4000K
8W		DFN 25 W27 120	G25, Warm White, 2700K
8W		DFN 25 WW 120	G25, Warm White, 3000K
8W		DFN A19 V1 CW 120	A19, Cool White, 5000K
8W		DFN A19 V1 NW 120	A19, Neutral White, 4000K
8W		DFN A19 V1 W27 120	A19, Warm White, 2700K
8W		DFN A19 V1 WW 120	A19, Warm White, 3000K
10.5W		LS 30 75WE xxx GB xx 120	PAR30, various color temperatures
11.5W		DFN BR30 65WE CW 120 ^{††}	BR30, Cool White, 5000K, Medium base
11.5W		DFN BR30 65WE NW 120 ^{††}	BR30, Neutral White, 4000K, Medium base
11.5W		DFN BR30 65WE W27 120 ^{††}	BR30, Warm White, 2700K, Medium base
11.5W		DFN BR30 65WE WW 120 ^{††}	BR30, Warm White, 3000K, Medium base
13W		LS GLP6 W27 120 WH S1 BX	6" Downlight, 2700K, E26 retrofit
13.5W		DFN A19 V2 CW 120	A19, Cool White, 5000K
13.5W		DFN A19 V2 NW 120	A19, Neutral White, 4000K
13.5W		DFN A19 V2 W27 120	A19, Warm White, 2700K
13.5W		DFN A19 V2 WW 120	A19, Warm White, 3000K
15W		DFN BR30 CW FL 120	BR30, Cool White, 5000K
15W		DFN BR30 NW FL 120	BR30, Neutral White, 4000K
15W		DFN BR30 W27 FL 120	BR30, Warm White, 2700K
15W	DFN BR30 WW FL 120	BR30, Warm White, 3000K	
16W	DFN BR40 CW 120 [†]	BR40, Cool White, 5000K	
16W	DFN BR40 NW 120 [†]	BR40, Neutral White, 4000K	
16W	DFN BR40 W27 120 [†]	BR40, Warm White, 2700K	
16W	DFN BR40 WW 120 [†]	BR40, Warm White, 3000K	
17W	DFN 30 CW V2 FL 120	PAR30, Cool White, 5000K	
17W	DFN 30 CW V2 NFL 120	PAR30, Cool White, 5000K	
17W	DFN 30 NW V2 FL 120	PAR30, Neutral White, 4000K	

[†] Requires a minimum of 2 lamps

^{††} Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266J

Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated August 4, 2015
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Maestro[®] occupancy sensor C•L dimmers

Maestro Occupancy Sensor C•L: MSCL-OP153M, MSCL-VP153M

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description	
Lighting Science	17W	DFN 30 NW V2 NFL 120	PAR30, Neutral White, 4000K	
	17W	DFN 30 W27 V2 FL 120	PAR30, Warm White, 2700K	
	17W	DFN 30 W27 V2 NFL 120	PAR30, Warm White, 2700K	
	17W	DFN 30 WW V2 FL 120	PAR30, Warm White, 3000K	
	17W	DFN 30 WW V2 NFL 120	PAR30, Warm White, 3000K	
	18W	DFN 38 CW FL 120 [†]	PAR38, Cool White, 5000K	
	18W	DFN 38 CW NFL 120 [†]	PAR38, Cool White, 5000K	
	18W	DFN 38 NW FL 120 [†]	PAR38, Neutral White, 4000K	
	18W	DFN 38 NW NFL 120 [†]	PAR38, Neutral White, 4000K	
	18W	DFN 38 W27 FL 120 [†]	PAR38, Warm White, 2700K	
	18W	DFN 38 W27 NFL 120 [†]	PAR38, Warm White, 2700K	
	18W	DFN 38 WW FL 120 [†]	PAR38, Warm White, 3000K	
	18W	DFN 38 WW NFL 120 [†]	PAR38, Warm White, 3000K	
	24W	DFN 38 CW V2 FL 120	PAR38, Cool White, 5000K	
	24W	DFN 38 CW V2 NFL 120	PAR38, Cool White, 5000K	
	24W	DFN 38 NW V2 FL 120	PAR38, Neutral White, 4000K	
	24W	DFN 38 NW V2 NFL 120	PAR38, Neutral White, 4000K	
	24W	DFN 38 W27 V2 FL 120	PAR38, Warm White, 2700K	
	24W	DFN 38 W27 V2 NFL 120	PAR38, Warm White, 2700K	
	24W	DFN 38 WW V2 FL 120	PAR38, Warm White, 3000K	
	24W	DFN 38 WW V2 NFL 120	PAR38, Warm White, 3000K	
	Litetronics	14W	LP14550FL2D	BR30, 2700K, 925 Lumen
		14W	LP14550FL4D	BR30, 3000K, 925 Lumen
		14W	LP14550FL6D	BR30, 4000K, 925 Lumen
Lumapro	8W	8A19/LED/DIM/30 [†]	A19, Warm White, 3000K (6GEM2)	
	8W	8A19/LED/DIM/50 [†]	A19, Cool White, 5000K (6GEM3)	
	8W	8PAR20/LED/DIM30/NFL	PAR20, Warm White, 3000K (6GEM4)	
	8W	8PAR20/LED/DIM50/NFL	PAR20, Cool White, 5000K (6GEM5)	
	18W	18PAR38/LED/DIM/30/NFL [†]	PAR38, Warm White, 3000K	
	18W	18PAR38/LED/DIM/50/NFL [†]	PAR38, Cool White, 5000K	
Philips	4.5W	9290002439	Candle, Warm White, 2700K, 320 Lumen, E26 base, Post Light	
	4.5W	9290002797 ^{††}	Candle, 2700K, 330 Lumen, E26, blunt tip	
	4.5W	9290002889 ^{††}	Candle, 2700K, 330 Lumen, E12, blunt tip	
	4.5W	9290002890 ^{††}	A15, 2700K, 330 Lumen, E12	
	4.5W	9290002891 ^{††}	A15, 2700K, 330 Lumen, E26	
	6W	9290002242	MR16, 3000K, 300 Lumen, GU10 base	
	6W	9290002443	PAR16, 3000K, 300 Lumen, E26	
	7W	9290002020	PAR20, 2700K, 280 Lumen, Medium Base	
	7W	9290002706	A19 SlimStyle, Daylight, 5000K, 450 Lumen, E26	
	7W	7E26A55-E	A19, 2700K, 240 Lumen	
	7W	7E26PAR20D-1	PAR20, 2700K, 280 Lumen, Medium Base	
	7W	7E26PAR20-E	PAR20, 2700K	
	8W	9290002267	A19, 2700K, 470 Lumen	
	8W	9290002295	A19, 5000K, 470 Lumen	
	8W	9290002329	PAR20, 3000K, 470 Lumen, E26	
	8W	9290002330	PAR20	
	8W	9290002331	PAR20	
	8W	9290002332	PAR20	
	8W	9290002333	PAR20	
	8W	9290002334	PAR20	
	8W	9290002335	PAR20	
	8W	9290002704	A19 SlimStyle, 2700K, 450 Lumen, E26, 40WE	
	8W	9E26A19DCCAAAA	A19, 2700K, 507 Lumen	
	8.5W	9290002543	BR30, 5000K, 730 Lumen, 8.5W	

[†] Requires a minimum of 2 lamps

^{††} Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266J

Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated August 4, 2015
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Maestro[®] occupancy sensor C•L dimmers

Maestro Occupancy Sensor C•L: MSCL-OP153M, MSCL-VP153M

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description
	9.5W	9290011117	BR30, 2700K, 730 Lumen, WarmGlow to 2200K (Nov 2014 or later)
	9.5W	9290011345	A19, Soft White, 2200-2700K, 800 Lumen, E26
	9.5W	9290011118 (452359)	BR30 SlimStyle, 2700K, 650 Lumen, E26, 65WE
	9.5W	9290011118 (452383)	BR30 SlimStyle, 2700K, 650 Lumen, E26, 65WE
	9.5W	9290011118 (452417)	BR30 SlimStyle, 2700K, 650 Lumen, E26, 65WE
	9.5W	9290011119 (452441)	BR30 SlimStyle, 5000K, 650 Lumen, E26, 65WE
	9.5W	9290011119 (452466)	BR30 SlimStyle, 5000K, 650 Lumen, E26, 65WE
	9.5W	9290011119 (452482)	BR30 SlimStyle, 5000K, 650 Lumen, E26, 65WE
	10.5W	9290002544	BR30, 2700K, 730 Lumen
	10.5W	9290002707	A19 SlimStyle, Soft White, 2700K, 800 Lumen, 3pk
	11W	9290002268	A19, 2700K, 830 Lumen
	11W	9290002296	A19, 5000K, 830 Lumen
	11W	9290011113	PAR30L, 3000K, ? Lumen, E26
	12W	12E26PAR30L-E2	PAR30, 3000K
	12W	9290002580 (431392)	BR40, 2700K, 800 Lumen
	12.5W	9290001829	A19, 2700K, 908 Lumen
	12.5W	12E26A60	A19, 2700K
	13W	9290002197	BR30, 2700K, 721 Lumen
	13W	9290002201	PAR30, 3000K, 750 Lumen
	13W	9290002233	PAR30, 2700K, 784 Lumen
	13W	9290002234	PAR30, 2700K, 770 Lumen
	13W	9290002323	PAR30, 5000K, 850 Lumen
	13W	9290011120	A21 SlimStyle, 2700K, 1100 Lumen
	13W	13E26B30DAAABAA	BR30, 3000K
	13W	9290002523 13PAR38/F25 3000 DIM AF RO	PAR38, 3000K, 950 Lumen
	14.5W	9290002199	BR40, 2700K, 832 Lumen
	15W	9290002426	A21, 2700K, 1180 Lumen
	15W	9290002595	A21, Soft White, 2700K, 1180 Lumen, E26
	15W	9290011111	PAR38, 3000K, 1050 Lumen, E26, Flood
	15W	9290011112	PAR38, 5000K, 1050 Lumen, E26, Flood
	17W	9290002018	A21, 2700K
	17W	17E26A21D	A21, 2700K
	17W	17E26PAR38-E2	PAR38, 3000K
	18W	9290002202	PAR38, 3000K, 951 Lumen, Medium Base
	18W	9290002236	PAR38
	18W	9290002237	PAR38
	18W	9290002245	PAR38, 2700K, 938 Lumen
	18W	9290002246	PAR38
	18W	9290002307	PAR38
	18W	9290002308	PAR38
	18W	9290002309	PAR38
	18W	9290002310	PAR38
	18W	9290002311	PAR38
	18W	18E26PAR38-3	PAR38
	18W	18E26PAR38-4	PAR38
	19W	9290002473	PAR38, 3000K, 1250 Lumen
	19.5W	9290002251	PAR38, 3000K, 1210 Lumen
	19.5W	9290002252	PAR38, 2700K, 1183 Lumen
	19.5W	9290002253	PAR38, 3000K, 1212 Lumen
	19.5W	9290002291	PAR38, 4000K, 1207 Lumen
	19.5W	9290002312	PAR38, 2700K, 1100 Lumen
	19.5W	9290002313	PAR38, 2700K, 1196 Lumen
	19.5W	9290002314	PAR38, 3000K, 1200 Lumen
	19.5W	9290002315	PAR38, 3000K, 1225 Lumen
	19.5W	9290002316	PAR38, 4000K, 1200 Lumen
	19.5W	9290002317	PAR38, 4000K, 1245 Lumen
	19.5W	9290002321	PAR38, 2700K, 1172 Lumen

Philips

† Requires a minimum of 2 lamps
† † Requires a minimum of 3 lamps
© Lutron Electronics Co., Inc. | PN 368-3266J

Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated August 4, 2015
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Maestro[®] occupancy sensor C•L dimmers

Maestro Occupancy Sensor C•L: MSCL-OP153M, MSCL-VP153M

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description
Philips	19.5W	9290002322	PAR38, 5000K, 1300 Lumen
	22W	9290002290	A21, 2700K, 1780 Lumen, Medium base
Satco	11W	S9084	PAR30, 3000K, 780 Lumen, E26, short neck, 25° Beam
	11W	S9085	PAR30, 4000K, 780 Lumen, E26, short neck, 25° Beam
	11W	S9086	PAR30, 3000K, 780 Lumen, E26, short neck, 40° Beam
	11W	S9087	PAR30, 4000K, 780 Lumen, E26, short neck, 40° Beam
	11W	S9088	PAR30, 3000K, 780 Lumen, E26, long neck, 25° Beam
	11W	S9089	PAR30, 4000K, 780 Lumen, E26, long neck, 25° Beam
	11W	S9090	PAR30, 3000K, 780 Lumen, E26, long neck, 40° Beam
	11W	S9091	PAR30, 4000K, 780 Lumen, E26, long neck, 40° Beam
	17W	S8977-S8979	PAR38
	17W	S8984-S8986	PAR38
	17W	S9092	PAR38, 3000K, 1200 Lumen, E26, 25° beam
	17W	S9093	PAR38, 4000K, 1200 Lumen, E26, 25° beam
	17W	S9094	PAR38, 3000K, 1200 Lumen, E26, 40° beam
	17W	S9095	PAR38, 4000K, 1200 Lumen, E26, 40° beam
	Solais	7W	LRP20/25/27K
7W		LRP20/25/30K	PAR20, 3000K, 500 Lumen, E26, 25° Beam
7W		LRP20/40/27K	PAR20, 2700K, 475 Lumen, E26, 40° Beam
7W		LRP20/40/30K	PAR20, 3000K, 500 Lumen, E26, 40° Beam
11W		LR20/25/27K/675/xx	PAR20, 2700K, 675 Lumen, E26, narrow flood
11W		LR20/25/30K/750	PAR20, 3000K, 750 Lumen, E26, narrow flood
11W		LR20/40/27K/675/xx	PAR20, 2700K, 675 Lumen, E26, wide flood
11W		LR20/40/30K/750/xx	PAR20, 3000K, 750 Lumen, E26, wide flood
16W		LR30/10/27K/1100/xx	PAR30, 2700K, 1100 Lumen, E26, short neck, 10° Beam
16W		LR30/10/30K/1125/xx	PAR30, 3000K, 1125 Lumen, E26, short neck, 10° Beam
16W		LR30/10/30K/1200/xx	PAR30, 3000K, 1200 Lumen, E26, short neck, 10° Beam
16W		LR30/15/27K/1100/xx	PAR30, 2700K, 1100 Lumen, E26, short neck, 15° Beam
16W		LR30/15/30K/1125/xx	PAR30, 3000K, 1125 Lumen, E26, short neck, 15° Beam
16W		LR30/15/30K/1200/xx	PAR30, 3000K, 1200 Lumen, E26, short neck, 15° Beam
16W		LR30/25/27K/1100/xx	PAR30, 2700K, 1100 Lumen, E26, short neck, 25° Beam
16W		LR30/25/30K/1125/xx	PAR30, 3000K, 1125 Lumen, E26, short neck, 25° Beam
16W		LR30/25/30K/1200/WH	PAR30, 3000K, 1200 Lumen, E26, short neck, 25° Beam
16W		LR30/40/27K/1100/xx	PAR30, 2700K, 1100 Lumen, E26, short neck, 40° Beam
16W		LR30/40/30K/1125/xx	PAR30, 3000K, 1125 Lumen, E26, short neck, 40° Beam
16W		LR30/40/30K/1200/xx	PAR30, 3000K, 1200 Lumen, E26, short neck, 40° Beam
16W		LRP38/25/27K	PAR38, 2700K, 1025 Lumen, E26, 25° Beam
16W		LRP38/25/30K	PAR38, 3000K, 1100 Lumen, E26, 25° Beam
16W		LRP38/40/27K	PAR38, 2700K, 1025 Lumen, E26, 40° Beam
16W		LRP38/40/30K	PAR38, 3000K, 1100 Lumen, E26, 40° Beam
Switch	20W	LR38/25/30K/1450/SL	PAR38, 3000K, 1450 Lumen, E26, 15° Beam
	28W	LR38/15/27K/2000/xx	PAR38, 2700K, 2000 Lumen, E26
	28W	LR38/15/30K/2100/xx	PAR38, 3000K, 2100 Lumen, E26
	28W	LR38/25/27K/2000/xx	PAR38, 2700K, 2000 Lumen, E26
	28W	LR38/25/30K/2100/xx	PAR38, 3000K, 2100 Lumen, E26
	28W	LR38/40/27K/2000/xx	PAR38, 2700K, 2000 Lumen, E26
	28W	LR38/40/30K/2100/xx	PAR38, 3000K, 2100 Lumen, E26
	10W	A260FUS27B1	A19, 800 Lumen
	13W	75FU202	A19, 3000K, 1100 Lumen, E26
	Sylvania	6W	79643
7W		79120	PAR20, 2700K, 500 Lumen, E26
7W		LED7A19/DIM/0/SE/830 (78214)	A19, 3000K to 2000K, 450 Lumen, E26, Sunset Effect
7W		LED7A19/DIM/0/SE/830/RP (78213)	A19, 3000K to 2000K, 450 Lumen, E26, Sunset Effect
8W		LED8A/DIM/F/827 [†]	A19, 2700K
	8W	LED8A/DIM/F/830 [†]	A19, 3000K
	8W	LED8A15/DIM/827 [†]	A15, 2700K, 450 Lumen, Medium Base

[†] Requires a minimum of 2 lamps

^{††} Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266J

Dimmable CFL & LED bulbs

Compatible with C•L® dimmers

List Updated August 4, 2015
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Maestro® occupancy sensor C•L dimmers

Maestro Occupancy Sensor C•L: MSCL-OP153M, MSCL-VP153M

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description
Sylvania	8W	LED8A15C/DIM/827†	A15, 2700K, 450 Lumen, Candelabra Base
	8W	LED8A19DIMO827RP	A19, 2700K, 470 Lumen, E26
	8W	LED8G25/DIM/F/827	G25, 2700K
	8W	LED8G25/DIM/F/830	G25, 3000K
	8W	LED8PAR16/DIM/930/FL36/P/LW	PAR16, Soft White, 390 Lumen
	8W	LED8PAR16/GU10/DIM/930/FL36/RP	PAR16, GU10, Soft White, 390 Lumen
	8W	LED8PAR20/DIM/827/FL36	PAR 20, 2700K
	8W	LED8PAR20/DIM/827/NFL25	PAR 20, 2700K
	8W	LED8PAR20/DIM/830/FL36	PAR 20, 3000K
	8W	LED8PAR20/DIM/830/NFL25	PAR 20, 3000K
	8W	LED8R20/DIM/SE/830/RP	R20, Soft White, 2700K to 2000K, 520 Lumen
	9W	LED/550/RT4/827/FL80/WRFL†	4" Downlight, 2700K
	9W	LED/550/RT4/830/FL80/WRFL†	4" Downlight, 3000K
	10W	LED/600/RT4/830/FL80/RP†	Recessed lighting kit, 3000K, 600 Lumen
	10W	LED/RT4/600/827/FL80†	Recessed lighting kit, 2700K, 600 Lumen
	10W	LED10A19/DIM/O/SE/830	A19, 3000K, 800 Lumen
	10W	LED10A19/DIM/O/SE/830/RP (78215)	A19, 3000K, 800 Lumen
	10W	LED10PAR20/DIM//P/930/FL30	PAR20, 3000K, 550 Lumen
	10.5W	LED10A19/DIM/CL/O/827 (79146)	A19, 2700K, 800 Lumen, E26, 60WE
	10.5W	LED10A19/DIM/CL/O/827/BL (79147)	A19, 2700K, 800 Lumen, E26, 60WE
	10.5W	LED10A19/DIM/CL/O/827/G4 (79142)	A19, 2700K, 800 Lumen, E26, 60WE
	10.5W	LED10A19/DIM/CL/O/827/G4/BL (79143)	A19, 2700K, 800 Lumen, E26, 60WE
	10.5W	LED10A19/DIM/CL/O/827/RP (79644)	A19, 2700K, 800 Lumen, E26, 60WE
	10.5W	LED10A19/DIM/CL/O/850/G4 (79144)	A19, 5000K, 800 Lumen, E26, 60WE
	10.5W	LED10A19/DIM/CL/O/850/G4/BL (79145)	A19, 5000K, 800 Lumen, E26, 60WE
	11W	LED11BR30/DIM/HO/827/G3 (78413)	BR30, 2700K, 800 Lumen, E26
	11W	LED11BR30/DIM/HO/827/G3/RP (78415)	BR30, 2700K, 800 Lumen, E26
	11W	LED11BR30/DIM/HO/827/G3/RP (79121)	BR30, 2700K, 800 Lumen, E26
	12W	LED12BR30/DIM/HO/827	BR30, 2700K, Medium base
	12W	LED12BR30/DIM/HO/827/HVP	BR30, 2700K, Medium base
	12W	LED12BR30/DIM/SE/830/RP	BR30, Soft White, 2700K to 2000K, 850 Lumen
	15W	LED15BR40/DIM/HO/827/G3/RP	BR40, Soft White, 2700K, 1100 Lumen, E26, Flood
	15W	LED15PAR30/DIM/P/930/FL40	PAR30, 3000K
	15W	LED15PAR30LN/DIM/827/FL40	PAR30, 2700K
	15W	LED15PAR30LN/DIM/830/NFL25	PAR30, 3000K
	16W	LED16BR40DIMHO827	BR40, 2700K, 1100Lumen
	17W	LED17PAR30LN/DIM/830/WSP15/P	PAR30, 3000K, 1200 Lumen, E26, spot
	17W	LED17PAR30LN/DIM/830/WSP20	PAR30, 3000K, 1200 Lumen, E26, wide spot
	17W	LED17PAR30LN/DIM/P/930/NFL25	PAR30, 3000K, 900 Lumen
	20W	LED20PAR38/DIM/930/FL40/P2	PAR38, 3000K, 1000 Lumen,
20W	LED20PAR38DIM830FL40	PAR38, 3000K, 1300 Lumen	
21W	LED21/PAR38/DIM/P/930/FL30/HVP	PAR38, Warm White, 3000K, 1100 Lumen, E26, 21W	
21W	LED21PAR38/DIM/P/930/FL30	PAR38, 3000K, 1100 Lumen	

† Requires a minimum of 2 lamps

†† Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266J



Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated August 4, 2015
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Maestro[®] occupancy sensor C•L dimmers

Maestro Occupancy Sensor C•L: MSCL-OP153M, MSCL-VP153M

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description
Toshiba	13W	LDRB1327WE6USD2 (13BR40/27K-T)	BR40, 2700K, 950 Lumen
	13W	LDRB1340WE6USD2 (13BR40/40L-T)	BR40, 4000K, 1050 Lumen
Utilitech	3W	LG161/2DM/IF/LED [†]	G16.5, Warm White, 3000K, 200 Lumen, E12 base, frosted
	3.5W	LCFCDM/LED [†]	Candle, Flame Tip Clear, 3000K, Candelabra Base
	3.5W	LEFCDM/LED [†]	Candle, Flame Tip Clear, 3000K, Medium Base
	4.5W	LR14DMLED	R14, Soft White, 2700K, 300 Lumen, E26, 40WE
	4.8W	LA15DM/CL/300/LED [†]	A15, Warm White, 3000K, 300 Lumen, E26, clear
	4.8W	LA15DM/IF/300/LED [†]	A15, Warm White, 3000K, 300 Lumen, E26, frosted
	4.8W	LA15DMC/CL/300/LED [†]	A15, Warm White, 3000K, 300 Lumen, E12 base, clear
	4.8W	LCFCDM/300/LED [†]	Candle, Warm White, 3000K, 300 Lumen, E12 base, clear flame tip
	4.8W	LCFFDM/300/LED [†]	Candle, Warm White, 3000K, 300 Lumen, E12 base, frosted flame tip
	4.8W	LEFCDM/300/LED [†]	Candle, Warm White, 3000K, 300 Lumen, E26 base, clear flame tip
	4.8W	LG161/2DM/CL/300/LED [†]	G16.5, Warm White, 3000K, 300 Lumen, E12 base, clear
	4.8W	LG161/2DM/IF/300/LED [†]	G16.5, Warm White, 3000K, 300 Lumen, E12 base, frosted
	4.8W	LGMDM/CL/300/LED [†]	G16.5, Warm White, 3000K, 300 Lumen, E26, clear
	6.5W	LMR16/GU10/DM/LED [†]	MR16, GU10 base
	6.5W	LMR16DMGU10 [†]	MR16, GU10 base
	6.5W	LR16DMLED	R16, Soft White, 2700K, 400 Lumen, E26, 40WE
	7.5W	LA19DM/GU24/LED	A19, 3000K, GU24
	7.5W	LA19DM/LED	A19, 3000K, 450 Lumen, E26
	7.5W	LPAR20DM/5K/LED	PAR20, 5000K
	7.5W	LPAR20DM/LED	PAR20, 3000K
	8W	LA19DM/5K/LED	A19, 5000K
	8W	LG25DM/LEDG2	G25, Warm White, 3000K, 510 Lumen, E26
	8W	LR20DMLEDG2	R20, 2700K, 450 Lumen, E26 Medium base (70 mA smooth reflector version)
	9W	LR20HO/LED/G2	R20, Soft White, 650 Lumen, E26, flood
	9W	R20HO/LED/G2	R20, Soft White, 650 Lumen, E26, flood
	9.5W	LPAR20/5K/LEDG5	PAR20, 5000K, 500 Lumen
	9.5W	LPAR20/LEDG5	PAR20, 3000K, 450 Lumen
	9.5W	LPAR20DM/SP/LED	PAR20, 3000K, 465 Lumen, Spot
	9.8W	LA19DM/800/LED/G2	A19, 3000K, 800 Lumen
	10W	LA19DM/800/5K/LEDG2	A19, 5000K
	10W	LA19DM/800/LEDG2	A19, 3000K, 800 Lumen
	10W	LG25/DM/LED [†]	G25, 3000K
	11W	DLS02-04A27D1E-WH-F1	4" Downlight, 2700K, 600 Lumen, E26 retrofit
	11W	DLS02-04A27D1E-WH-F2	4" Downlight, 2700K, 600 Lumen, E26 retrofit 2pk
	11W	DLS02-06A27D1E-WH-F2	5" or 6" Downlight, 2700K, 700 Lumen, E26 retrofit 2pk
	11W	DLS02-41127D1E-WF1	4" Downlight, Soft White, 2700K, 650 Lumen, E26 retrofit
	12W	LPAR30L/LEDG7/2	PAR30L, 3000K, 800 Lumen, E26, long neck, 2PK
	13W	DLS02-06A50D1E-WH-F1	5" or 6" Downlight, 5000K, 700 Lumen, E26 retrofit
	13W	DLS02-61327D1E-WF1	5" or 6" Downlight, Soft White, 2700K, 800 Lumen, E26 retrofit
	13W	DLS02-61350D1E-WF1	5" or 6" Downlight, Daylight, 5000K, 800 Lumen, E26 retrofit
	13W	LBR30DM/LEDG2	BR30
13.5W	LA19/OM800/LED	A19, 3000K, 800 Lumen, Omni Directional	
13.5W	LA19DM/800/LED	A19, 3000K	
15W	LBR30HO/LED/G2	BR30, Soft White, 1150 Lumen	
15W	LPAR30L/5K/LEDG5	PAR30, 5000K, 800 Lumen, long neck flood	
15W	LPAR30L/LEDG5	PAR30, 3000K, 790 Lumen, long neck flood	
15W	LPAR30LDM/SP/LED	PAR30, 3000K, 790 Lumen, long neck, spot	
15W	LPAR30S/LEDG5	PAR30, 3000K, 750 Lumen, short neck flood	
16W	LA19/OM1100R/LED	A19, 3000K, 1100 Lumen, Omni Directional	
16W	LBR40DMLEDG2	BR40, 2700K, 1065 Lumen	
16W	LPAR38LEDG72	PAR38, 3000K, 950 Lumen, 2PK	

[†] Requires a minimum of 2 lamps

^{††} Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266J



Dimmable CFL & LED bulbs

Compatible with C•L® dimmers

List Updated August 4, 2015
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Maestro® occupancy sensor C•L dimmers

Maestro Occupancy Sensor C•L: MSCL-OP153M, MSCL-VP153M

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description
Utilitech	17W	BPCEBR40/DM/LED†	BR40
	17W	LBR40DM/LED†	BR40, 2700K, 1065 Lumen
	17.5W	YGA08A35-17.5W-827	BR40, 2700K, 1100 Lumen
	18W	LPAR38DM/5K/LED	PAR38, 5000K
	18W	LPAR38DM/LED	PAR38, 3000K
	20W	L20PAR38/LEDG5	PAR38, 3000K, 1000 Lumen, flood
	20W	LBR40HO/LED/G2	BR40, Soft White, 1400 Lumen
	20W	LPAR38/5K/LEDG5	PAR38, 5000K, 1000 Lumen, flood
	20W	LPAR38/LEDG5	PAR38, 3000K, 1000 Lumen, flood
	20W	LPAR38DM/SP/LED	PAR38, 3000K, 1000 Lumen, Spot
	20.5W	LPAR381400LEDG72	PAR38, 1450 Lumen, 2PK
	22W	LA/OM1600R/5K/LED	A21, Daylight, 5000K, 1600 Lumen
	22W	LA/OM1600R/LED	A21, Warm White, 3000K, 1600 Lumen
	23W	LPAR38/1400/5K/LEDG5	PAR38, 5000K, 1400 Lumen
Westinghouse	23W	LPAR38/1400/LEDG5	PAR38, 3000K, 1400 Lumen
	8W	8A19/LED/DIM/30†	A19, Warm White, 3000K
	8W	8A19/LED/DIM/50†	A19, Cool White, 5000K
	8W	8PAR20/LED/DIM30/NFL	PAR20, Warm White, 3000K
	8W	8PAR20/LED/DIM50/NFL	PAR20, Warm White, 5000K
	18W	18PAR38/LED/DIM/30/NFL†	PAR38, 3000K
	18W	18PAR38/LED/DIM/50/NFL†	PAR38, 5000K

† Requires a minimum of 2 lamps
†† Requires a minimum of 3 lamps
© Lutron Electronics Co., Inc. | PN 368-3266J

Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated August 4, 2015
For the most up-to-date list, visit
www.lutron.com/dimcflled



CFL bulbs for Maestro[®] occupancy sensor C•L dimmers

Maestro Occupancy Sensor C•L: MSCL-OP153M, MSCL-VP153M

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description
EcoSmart	5W	8TC05 ^{††}	Candle, (ES5CCDF052, ES9CCDF052)
	5W	8TC05F ^{††}	Candle, Torpedo Tip, 2700K, 200 Lumen
	5W	8TFC05F ^{††}	Candle, Flame Tip, 2700K, 200 Lumen
	11W	BPESL11R20/DM/ESM	R20, Soft White
	14W	40114 [†]	Spiral, Soft White (ES5M814DIM2, ES9M814DIM2)
	14W	2R2014DIM	R20, 2700K, 410 Lumen
	15W	2R3015DIM	R30 Flood, Soft White (ES5R315DIM2)
	15W	2R3015DIM35K	R30 Flood, Bright White (ES5R315DIM35K)
Feit	11W	BPESL11R20/DM	R20
	23W	BPESL23R40/DIM	R40
GE	26W	FLE26/2/DVR/40	R40
	26W	FLE26HT3/2/DV/SW	Spiral
Philips	20W	EL/A R40 Dim 20W	R40
Sylvania	5W	CF5EL/B10/827/L/DIM [†]	Candle
	5W	CF5EL/DEC/DIM [†]	Candle
	14W	CF14EL/TWIST/DIM	Spiral
	24W	CF24EL/TWIST/DIM	Spiral
TCP	5W	8TC05F ^{††}	Candle
	5W	8TFC05F ^{††}	Candle, flame tip
	14W	40114 [†]	Spiral
	14W	2R2014DIM	R20, 2700K, 410 Lumen
	15W	2R3015DIM	R30, Soft White, 2700K
	16W	4R3016TD	R30, TruDim, 2700K
	16W	4R3016TD30K	R30, TruDim, 3000K
	16W	4R3016TD35K	R30, TruDim, 3500K
	16W	4R3016TD41K	R30, TruDim, 4100K
	16W	4R3016TD50K	R30, TruDim, 5000K
Utilitech	11W	LBP11R20DM	R20, Soft White, 2700K
	15W	LBP15TDM	Spiral
	23W	LBP23R40DM	R40
	23W	LBP23TDM	Spiral

† Requires a minimum of 2 lamps

†† Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266J

Dimmable CFL & LED bulbs

Compatible with C•L® dimmers

List Updated August 4, 2015
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Maestro® C•L dimmers

Maestro C•L: MACL-153M

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description
Commercial Electric	12.5W	CE-JB4-600L-27K (T47)	4" Downlight, 600 Lumen, Soft White, 2700K
	12.5W	CE-JB6-650L-27K (T67)	6" Downlight, 650 Lumen, Soft White, 2700K
	14.5W	CED6 WW 120 WH	6" Downlight, White
Cooper	13.8W	ML706827	Halo 6" Retrofit Module 2700K
	13.8W	ML706830	Halo 6" Retrofit Module 3000K
	13.8W	ML706835	Halo 6" Retrofit Module 3500K
	13.8W	ML706840	Halo 6" Retrofit Module 4000K
	6W	BA19-04527OMF-12DE26-1U100	A19, Warm Soft White, 2700K, 450 Lumen, Medium base
Cree	6W	BA19-04527OMF-12DE26-2U100	A19, Warm Soft White, 2700K, 450 Lumen, Medium base
	6W	BA19-04527OMF-12DE26-3U100	A19 4Flow, 2700K, 460 Lumen, E26
	6W	BA19-04550OMF-12DE26-2U500	A19, 5000K, 450 Lumen, 40WE, 4pk
	6W	BA19-04550OMF-12DE26-3U100	A19 4Flow, 5000K, 460 Lumen, E26
	9.5W	BA19-08027OMF-12DE26-2U100	A19, Soft White, 2700K, 800 Lumen, Medium base
	9.5W	BA19-08027OMF-12DE26-2U500	A19, 2700K, 800 Lumen, E26, 60WE, 4pk
	9.5W	BBR30-06527FLF-12DE26-1U100	BR30, 650 Lumen, Soft White, 2700K
	9.5W	BBR30-06550FLF-12DE26-1U100	BR30, Daylight, 5000K 650 Lumen, 9.5W
	9.5W	CR4-575L	4" Downlight, 2700K, 575 Lumen, Medium Base
	9.5W	CR6-575L	6" Downlight, 2700K, Medium Base
	9.5W	CR6-575L-GU24	6" Downlight, 2700K, GU24 Base
	9.5W	H1CR6TW62527E04	6" Downlight, 2700K, 625 Lumen
	12.5W	DRDL6-06227009-12DE26-1C100	6" Downlight, 2700K TW, 625 Lumen, E26 retrofit
	12.5W	DRDL6-06250009-12DE26-1C100	6" Downlight, 5000K TW, 625 Lumen, E26 retrofit
	18W	BA21-16027OMF-12DE26-1U100	A21, 2700K, 1600 Lumen, E26, 18W
	18W	BA21-16050OMF-12DE26-1U100	A21, 5000K, 1600 Lumen, E26, 18W
	Duracell	6W	LED110342B
6W		LED11340B	A19, 3000K, 450 Lumen, E26, 40WE
6W		LED11341B	A19, 450 Lumen, E26, 40WE
EcoSmart	6W	ECS 25 40WE W27 120 DG	G25, 2700K, 400 Lumen, E12
	6W	ECS GP19 WW 40WE 120†	A19, 3000K
	7W	ECS 25 60WE W27 120 DG	G25, 2700K, E12
	7W	ECS BR20 50WE CW 120 G1 BL	BR20, Daylight, 5000K, 525 Lumen, E26
	7.5W	BPA15/CL/500/LED/ESM	A15, Soft White, 2700K, 500 Lumen, E26
	7.5W	BPA15C/CL500/LED/ESM	A15, Soft White, 2700K, 500 Lumen, E12
	7.5W	BPCFC/500/LED/ESM	B10, Soft White, 2700K, 500 Lumen, E12
	7.5W	BPEFC/500/LED/ESM	B10, Soft White, 2700K, 500 Lumen, E26
	7.5W	BPGM/CL/500/LED/ESM	G16.5, Soft White, 2700K, 500 Lumen, E26
	8W	ECS 19 CW 120	A19, Cool White, 5000K
	8W	ECS 19 WW 120	A19, Warm White, 3000K
	8W	ECS 20 50WE CW FL 120 TP	PAR20, Daylight, 5000K, 575 Lumen, E26
	8W	ECS 20 50WE WW FL 120 TP	PAR20, Bright White, 3000K, 500 Lumen, E26
	8W	ECS 20 CW FL 120	PAR20, Daylight, 5000K, 490 Lumen
	8W	ECS 20 CW FL 50WE 120	PAR20, 5000K, 490 Lumen
	8W	ECS 20 WW FL 120	PAR20, Warm White, 3000K
	8W	ECS 20 WW FL 50WE 120	PAR20, 3000K, 450 Lumen
	8W	ECS 25 WW 120	G25, Warm White, 3000K
	8W	ECS A19 V1 CW 120	A19, Daylight, 5000K
	8W	ECS A19 V1 WW 120	A19, Warm White, 3000K
	8W	ECS BR20 50WE CW 120 DG	BR20, Daylight, 5000K, 600 Lumen, E26
	8W	ECS BR20 50WE W27 120	BR20, Soft White, 2700K
	8W	ECS BR20 50WE WW 120 DG	BR20, Warm White, 3000K, 550 Lumen, E26
	9.5W	ECO4-575L	4" Downlight, 2700K, 575 Lumen, Medium Base
	9.5W	ECO4-575L-50K	4" Downlight, 5000K, 575 Lumen, Medium Base
	9.5W	ECO4-575L-50K-GU24	4" Downlight, 5000K, GU24 Base
	9.5W	ECO-575L	6" Downlight, 2700K, Medium Base
9.5W	ECO-575L-50K	6" Downlight, 5000K, Medium Base	
9.5W	ECO-575L-50K-GU24	6" Downlight, 5000K, GU24 Base	
9.5W	ECO-575L-GU24	6" Downlight, 2700K, GU24 Base	

† Requires a minimum of 2 lamps

†† Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266J

Dimmable CFL & LED bulbs

Compatible with C•L® dimmers

List Updated August 4, 2015
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Maestro® C•L dimmers

Maestro C•L: MACL-153M

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description	
EcoSmart	9.5W	ECS DN4 CW E26 120	4" Downlight, Daylight, 5000K, 650 Lumen, E26, retrofit	
	9.5W	ECS DN4 CW GU24 120	4" Downlight, Daylight, 5000K, 650 Lumen, Gu24 base, retrofit	
	9.5W	ECS DN4 W27 E26 120	4" Downlight, Soft White, 2700K, 650 Lumen, E26 retrofit	
	9.5W	ECS DN4 W27 GU24 120	4" Downlight, Soft White, 2700K, 650 Lumen, GU24 base, retrofit	
	9.5W	ECS DN6 CW GU24 120	6" Downlight, Daylight, 5000K, 650 Lumen, Gu24 base, retrofit	
	9.5W	ECS DN6 W27 E26 120	6" Downlight, Soft White, 2700K, 650 Lumen, E26 retrofit	
	9.5W	ECS DN6 W27 E26 120 2BX	6" Downlight, Soft White, 2700K, E26 retrofit, 2pk	
	9.5W	ECS DN6 W27 E26 120 BX V3	6" Downlight, Soft White, 2700K, 650 Lumen, E26 retrofit	
	9.5W	ECS DN6 W27 GU24 120	6" Downlight, Soft White, 2700K, 650 Lumen, GU24 base, retrofit	
	10W	ECS BR30 65WE CW 120 DG†	BR30, Daylight, 5000K, 700 Lumen, E26	
	10W	ECS BR30 65WE CW 120 DG 3PK†	BR30, Daylight, 5000K, 700 Lumen, E26, 3pk	
	10W	ECS BR30 65WE W27 120 DG†	BR30, Soft White, 2700K, 650 Lumen, E26	
	10W	ECS BR30 65WE W27 120 DG 3BX†	BR30, Soft White, 2700K, 650 Lumen, E26, 3pk	
	10W	ECS BR30 65WE WW 120 DG†	BR30, Warm White, 3000K, 650 Lumen, E26	
	10.5W	ECS 30 75WE WW GB FL 120	PAR30 Gimbal, 3000K, 750 Lumen, E26, 75WE	
	10.5W	ECS 30 75WE xxx GB xx 120	PAR30 Gimbal, Various color temperatures, 75WE	
	11.5W	ECS BR30 65WE CW 120†	BR30, 5000K, Medium Base	
	11.5W	ECS BR30 65WE W27 120†	BR30, 2700K, 650 Lumen, Medium Base	
	12W	ECS A19 CW 60WE 120	A19, 5000K, 850 Lumen	
	12W	ECS A19 WW 60WE 120	A19, 3000K, 800 Lumen	
	13W	ECS 30 CW FL 75WE 120	PAR30, 5000K, 810 Lumen	
	13W	ECS 30 WW FL 75WE 120	PAR30, 3000K, 750 Lumen	
	13W	ECS A19 V2 CW 120	A19, Daylight, 5000K	
	13W	ECS A19 V2 WW 120	A19, Warm White, 3000K	
	14W	ECS BR40 90WE CW 120 DG	BR40, Daylight, 5000K, 1050 Lumen, E26	
	14W	ECS BR40 90WE W27 120 DG	BR40, 2700K, 1000 Lumen, E26	
	15W	ECS 30 CW FL 120	PAR30, Daylight, 5000K	
	15W	ECS 30 WW FL 120	PAR30, Warm White, 3000K	
	15W	ECS 38 CW FL 90WE 120	PAR38, 5000K, 970 Lumen	
	15W	ECS 38 WW FL 90WE 120	PAR38, 3000K, 900 Lumen	
	15W	ECS BR30 75WE CW 120 G1 BL	BR30, Daylight, 5000K, 985 Lumen, E26	
	15W	ECS BR30 75WE W27 120 G1 3PK	BR30, Soft White, 2700K, 940 Lumen, E26, 3pk	
	15W	ECS BR30 75WE W27 120 G1 BL	BR30, Soft White, 2700K, 940 Lumen, E26	
	15W	ECS BR30 W27 FL 120	BR30, Soft White, 2700K	
	15W	ECS BR40 90WE W27 120	BR40, Soft White, 2700K	
	16W	ECS BR40 W27 FL 120	BR40, Soft White, 2700K	
	17W	ECS 30 V2 WW FL 120	PAR30, Warm White, 3000K	
	18W	ECS 38 CW FL 120	PAR38, Daylight, 5000K	
	18W	ECS 38 WW FL 120	PAR38, Warm White, 3000K	
	24W	ECS 38 V2 WW FL 120	PAR38, Warm White, 3000K	
	Feit	3.5W	CFCDM/LED†	Candle, Flame Tip Clear, 3000K, Candelabra Base
		3.5W	EFCDM/LED†	Candle, Flame Tip Clear, 3000K, Medium Base
4.5W		R14DM/LED	R14, Soft White, 2700K, 300 Lumen, E26, 40WE	
4.8W		CFCDM/300/LED†	Candle, 3000K, 310 Lumen, Candelabra Base	
4.8W		EFCDM/300/LED†	Candle, 3000K, 310 Lumen, Medium Base	
5W		MR16/GU10/DM/LED	MR16, GU10 Base	
6.5W		BPMR16/GU10/DM/LED	MR16, GU10 base	
6.5W		MR16/GU10/DM/LED	MR16, GU10 base	
6.5W		R16DM/LED	R16, Soft White, 2700K, 400 Lumen, E26, 40WE	
7.5W		PAR20DM/5K/LED	PAR20, 5000K	
7.5W		PAR20DM/LED	PAR20, 3000K	
8W		A19/DM/GU24/LED	A19, 3000K, GU24 Base	
8W	A19/DM/LED	A19, 3000K		

† Requires a minimum of 2 lamps

†† Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266J

Dimmable CFL & LED bulbs

Compatible with C•L® dimmers

List Updated August 4, 2015
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Maestro® C•L dimmers

Maestro C•L: MACL-153M

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description	
Feit	8W	A19/DM/LED/CAN	A19	
	8W	A19/DM/LED/RP/CAN	A19	
	8W	A19DM/5K/LED	A19, 5000K	
	8W	BPCEA19/DM/LED	A19	
	8W	BPCER20/DM/LED†	R20 (90mA ridged reflector version)	
	8W	R20/DM/LED†	R20, 2700K, 450 Lumen (90mA ridged reflector version)	
	8W	R20DM/LED/CAN†	R20 (90mA ridged reflector version)	
	9.5W	BPCER20/DM/LED	PAR20	
	9.5W	PAR20/5K/LEDG5	PAR20, 5000K	
	9.5W	PAR20/5K/LEDG5/CAN	PAR20, 5000K	
	9.5W	PAR20/LEDG5	PAR20, 3000K, 450 Lumen	
	9.5W	PAR20/LEDG5/CAN	PAR20	
	10W	BPAG800/5K/LED	A19, 5000K	
	10W	BPAG800/LED	A19, 3000K, 800 Lumen	
	10W	G25/DM/LED†	G25, 3000K	
	13W	BPCEBR30LED	BR30	
	13.5W	A19/OM800/5K/LED	A19, 5000K, Omni Directional	
	13.5W	A19/OM800/LED	A19, 3000K, Omni Directional	
	13.5W	A19DM/800/LED	A19, 3000K	
	13.5W	BPCEA19/OM800/LED	A19, Omni Directional	
	13.5W	BPCEA19/OM800/LED/CAN	A19, Omni Directional	
	14W	LEDR56/830	Downlight, 3000K, 925 Lumen, retrofit kit	
	15W	BPCEPAR30/LEDG5	PAR30	
	15W	PAR30L/5K/LEDG5	PAR30, 5000K	
	15W	PAR30L/5K/LEDG5/CAN	PAR30, 5000K	
	15W	PAR30L/LEDG5	PAR30	
	15W	PAR30L/LEDG5/CAN	PAR30	
	16W	A19/OM1100R/LED	A19, 3000K, 1100 Lumen, Omni Directional	
	16.8W	LEDR56/3K	5" or 6" Downlight, 3000K, 840 Lumen	
	17W	BPCEBR40/LED	BR40, 2700K, 1065 Lumen	
	17W	BR40/DM/LED†	BR40, 2700K, 1065 Lumen	
	18W	18PAR38/DM/LED	PAR38, 3000K	
	18W	PAR38DM/5K/LED	PAR38, 5000K	
	18W	PAR38DM/LED	PAR38, 3000K	
	20W	20PAR38/LEDG5	PAR38	
	20W	BPCEPAR38/LEDG5	PAR38	
	20W	PAR38/5K/LEDG5	PAR38, 5000K	
	20W	PAR38/5K/LEDG5/CAN	PAR38, 5000K	
	20W	PAR38/LEDG5	PAR38	
	20W	PAR38/LEDG5/CAN	PAR38	
	20.5W	LEDR56/827	5" or 6" Downlight, 2700K, 1245 Lumen	
	22W	A/OM1600R/27K/LED	A21, 2700K, 1600 Lumen	
	22W	A/OM1600R/5K/LED	A21, Daylight, 5000K, 1600 Lumen	
	22W	A/OM1600R/LED	A21, Warm White, 3000K, 1600 Lumen	
	GE	8W	LED8DA19/827	A19, 2700K, 450 Lumen, E26
		10W	LED10DP30S827/20	PAR30, 2700K, Short Neck, Silver Base
		10W	LED10DP30S830/20	PAR30, 3000K, Short Neck, Silver Base
10W		LED10DP30W827/20	PAR30, 2700K, Short Neck, White Base	
10W		LED10DP3LS827/20	PAR30, 2700K, Long Neck, Silver Base	
10W		LED10DP3LS830/20	PAR30, 3000K, Long Neck, Silver Base	
11W		LED11DA19RVL/TP	A19, 2700K, 570 Lumen	
11W		LED11DA19V2	A19, 2700K, 800 Lumen	
12W		LED12DR30RVL/BK	BR30, Reveal	
12W		LED12DR30RVL/CDN	BR30, Reveal	
12W		LED12DR30RVL/TP	BR30, Reveal 2850K, 630 Lumen	
12W		LED12RS4RVLE26PB (95390)	Downlight, 2700K, 630 Lumen, E26	
12W		LED12RS4RVLGUPB (95391)	Downlight, 2700K, 630 Lumen, GU24	

† Requires a minimum of 2 lamps

†† Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266J

Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated August 4, 2015
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Maestro[®] C•L dimmers

Maestro C•L: MACL-153M

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description	
GE	12W	LED12RS6RVL326PB (95392)	Downlight, 2700K, 630 Lumen, E26	
	12W	LED12RS6RVLGUPB (95393)	Downlight, 2700K, 630 Lumen, GU24	
	13W	LED13DA19/830	A19, 3000K	
	18W	LED18D38W827/15	PAR38, 2700K, E26, 15° Beam	
	18W	LED18D38W827/25	PAR38, 2700K, E26, 25° Beam	
	18W	LED18D38W827/40	PAR38, 2700K, E26, 40° Beam	
	18W	LED18D38W830/15	PAR38, 3000K, 1400 Lumen, E26, 15° Beam	
	18W	LED18D38W830/25	PAR38, 3000K, 1400 Lumen, E26, 25° Beam	
	18W	LED18D38W830/40	PAR38, 3000K, 1400 Lumen, E26, 40° Beam	
	18W	LED18D38W927/15	PAR38, 2700K, 1100 Lumen, E26, 15° Beam	
	18W	LED18D38W927/25	PAR38, 2700K, 1100 Lumen, E26, 25° Beam	
	18W	LED18D38W927/40	PAR38, 2700K, 1100 Lumen, E26, 40° Beam	
	18W	LED18D38W930/15	PAR38, 3000K, 1200 Lumen, E26, 15° Beam	
	18W	LED18D38W930/25	PAR38, 3000K, 1200 Lumen, E26, 25° Beam	
	18W	LED18D38W930/40	PAR38, 3000K, 1200 Lumen, E26, 40° Beam	
	20W	LED20DP38S827/15	PAR38, 2700K, 15° Beam, Silver Base	
	20W	LED20DP38S827/25	PAR38, 2700K, 25° Beam, Silver Base	
	20W	LED20DP38S827/40	PAR38, 2700K, 40° Beam, Silver Base	
	20W	LED20DP38S830/15	PAR38, 3000K, 15° Beam, Silver Base	
	20W	LED20DP38S830/25	PAR38, 3000K, 25° Beam, Silver Base	
	20W	LED20DP38S830/40	PAR38, 3000K, 40° Beam, Silver Base	
	Halco	20W	PAR38FL20/827/LED	PAR38, 2700K, 1150 Lumen Flood
		20W	PAR38FL20/830/LED	PAR38, 3000K, 1200 Lumen Flood
		20W	PAR38FL20/840/LED	PAR38, 4000K, 1250 Lumen Flood
		20W	PAR38FL20/850/LED	PAR38, 5000K, 1300 Lumen Flood
20W		PAR38NFL20/827/LED	PAR38, 2700K, 1150 Lumen Flood	
20W		PAR38NFL20/830/LED	PAR38, 3000K, 1200 Lumen Flood	
20W		PAR38NFL20/840/LED	PAR38, 4000K Flood	
20W		PAR38NFL20/850/LED	PAR38, 5000K, 1300 Lumen Flood	
20W		PAR38SP20/827/LED	PAR38, 2700K, 1150 Lumen Spot	
20W		PAR38SP20/830/LED	PAR38, 3000K, 1200 Lumen Spot	
20W		PAR38SP20/840/LED	PAR38, 4000K Spot	
20W		PAR38SP20/850/LED	PAR38, 5000K, 1300 Lumen Spot	
Lighting Science		8W	DFN 19 CW 120	A19, Cool White, 5000K
	8W	DFN 19 NW 120	A19, Neutral White, 4000K	
	8W	DFN 19 W27 120	A19, Warm White, 2700K	
	8W	DFN 19 WW 120	A19, Warm White, 3000K	
	8W	DFN 20 CW FL 120	PAR20, Cool White, 5000K	
	8W	DFN 20 CW NFL 120	PAR20, Cool White, 5000K	
	8W	DFN 20 NW FL 120	PAR20, Neutral White, 4000K	
	8W	DFN 20 NW NFL 120	PAR20, Neutral White, 4000K	
	8W	DFN 20 W27 FL 120	PAR20, Warm White, 2700K	
	8W	DFN 20 W27 NFL 120	PAR20, Warm White, 2700K	
	8W	DFN 20 WW FL 120	PAR20, Warm White, 3000K	
	8W	DFN 20 WW NFL 120	PAR20, Warm White, 3000K	
	8W	DFN 25 CW 120	G25, Cool White, 5000K	
	8W	DFN 25 NW 120	G25, Neutral White, 4000K	
	8W	DFN 25 W27 120	G25, Warm White, 2700K	
	8W	DFN 25 WW 120	G25, Warm White, 3000K	
	8W	DFN A19 V1 CW 120	A19, Cool White, 5000K	
	8W	DFN A19 V1 NW 120	A19, Neutral White, 4000K	
	8W	DFN A19 V1 W27 120	A19, Warm White, 2700K	
	8W	DFN A19 V1 WW 120	A19, Warm White, 3000K	
	10.5W	LS 30 75WE xxx GB xx 120	PAR30, various color temperatures	
	11.5W	DFN BR30 65WE CW 120 [†]	BR30, Cool White, 5000K, Medium base	
	11.5W	DFN BR30 65WE NW 120 [†]	BR30, Neutral White, 4000K, Medium base	
	11.5W	DFN BR30 65WE W27 120 [†]	BR30, Warm White, 2700K, Medium base	

[†] Requires a minimum of 2 lamps

^{††} Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266J

Dimmable CFL & LED bulbs

Compatible with C•L® dimmers

List Updated August 4, 2015
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Maestro® C•L dimmers

Maestro C•L: MACL-153M

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description
	11.5W	DFN BR30 65WE WW 120†	BR30, Warm White, 3000K, Medium base
	13W	LS GLP6 W27 120 WH S1 BX	6" Downlight, 2700K, E26 retrofit
	13.5W	DFN A19 V2 CW 120	A19, Cool White, 5000K
	13.5W	DFN A19 V2 NW 120	A19, Neutral White, 4000K
	13.5W	DFN A19 V2 W27 120	A19, Warm White, 2700K
	13.5W	DFN A19 V2 WW 120	A19, Warm White, 3000K
	14.5W	GLP6 NW WH	6" Downlight, White, 4000K
	14.5W	GLP6 W27 WH	6" Downlight, White, 2700K
	14.5W	GLP6 WW WH	6" Downlight, Warm White, 3000K
	15W	DFN 30 CW FL 120	PAR30, Cool White, 5000K
	15W	DFN 30 CW NFL 120	PAR30, Cool White, 5000K
	15W	DFN 30 NW FL 120	PAR30, Neutral White, 4000K
	15W	DFN 30 NW NFL 120	PAR30, Neutral White, 4000K
	15W	DFN 30 W27 FL 120	PAR30, Warm White, 2700K
	15W	DFN 30 W27 NFL 120	PAR30, Warm White, 2700K
	15W	DFN 30 WW FL 120	PAR30, Warm White, 3000K
	15W	DFN 30 WW NFL 120	PAR30, Warm White, 3000K
	15W	DFN BR30 CW FL 120	BR30, Cool White, 5000K
	15W	DFN BR30 NW FL 120	BR30, Neutral White, 4000K
	15W	DFN BR30 W27 FL 120	BR30, Warm White, 2700K
	15W	DFN BR30 WW FL 120	BR30, Warm White, 3000K
	16W	DFN BR40 CW 120	BR40, Cool White, 5000K
	16W	DFN BR40 NW 120	BR40, Neutral White, 4000K
	16W	DFN BR40 W27 120	BR40, Warm White, 2700K
	16W	DFN BR40 WW 120	BR40, Warm White, 3000K
	17W	DFN 30 CW V2 FL 120	PAR30, Cool White, 5000K
	17W	DFN 30 CW V2 NFL 120	PAR30, Cool White, 5000K
	17W	DFN 30 NW V2 FL 120	PAR30, Neutral White, 4000K
	17W	DFN 30 NW V2 NFL 120	PAR30, Neutral White, 4000K
	17W	DFN 30 W27 V2 FL 120	PAR30, Warm White, 2700K
	17W	DFN 30 W27 V2 NFL 120	PAR30, Warm White, 2700K
	17W	DFN 30 WW V2 FL 120	PAR30, Warm White, 3000K
	17W	DFN 30 WW V2 NFL 120	PAR30, Warm White, 3000K
	18W	DFN 38 CW FL 120	PAR38, Cool White, 5000K
	18W	DFN 38 CW NFL 120	PAR38, Cool White, 5000K
	18W	DFN 38 NW FL 120	PAR38, Neutral White, 4000K
	18W	DFN 38 NW NFL 120	PAR38, Neutral White, 4000K
	18W	DFN 38 W27 FL 120	PAR38, Warm White, 2700K
	18W	DFN 38 W27 NFL 120	PAR38, Warm White, 2700K
	18W	DFN 38 WW FL 120	PAR38, Warm White, 3000K
	18W	DFN 38 WW NFL 120	PAR38, Warm White, 3000K
	24W	DFN 38 CW V2 FL 120	PAR38, Cool White, 5000K
	24W	DFN 38 CW V2 NFL 120	PAR38, Cool White, 5000K
	24W	DFN 38 NW V2 FL 120	PAR38, Neutral White, 4000K
	24W	DFN 38 NW V2 NFL 120	PAR38, Neutral White, 4000K
	24W	DFN 38 W27 V2 FL 120	PAR38, Warm White, 2700K
	24W	DFN 38 W27 V2 NFL 120	PAR38, Warm White, 2700K
	24W	DFN 38 WW V2 FL 120	PAR38, Warm White, 3000K
	24W	DFN 38 WW V2 NFL 120	PAR38, Warm White, 3000K
	14W	LP14550FL2D	BR30, 2700K, 925 Lumen
	14W	LP14550FL4D	BR30, 3000K, 925 Lumen
	14W	LP14550FL6D	BR30, 4000K, 925 Lumen
	8W	8A19/LED/DIM/30	A19, Warm White, 3000K (6GEM2)
	8W	8A19/LED/DIM/50	A19, Cool White, 5000K (6GEM3)
	8W	8PAR20/LED/DIM30/NFL	PAR20, Warm White, 3000K (6GEM4)
	8W	8PAR20/LED/DIM50/NFL	PAR20, Cool White, 5000K (6GEM5)
	15W	15PAR30/LED/DIM/30/NFL	PAR30, Warm White, 3000K

Lighting Science

Litetronics

Lumapro

† Requires a minimum of 2 lamps
†† Requires a minimum of 3 lamps
© Lutron Electronics Co., Inc. | PN 368-3266J

Dimmable CFL & LED bulbs

Compatible with C•L® dimmers

List Updated August 4, 2015
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Maestro® C•L dimmers

Maestro C•L: MACL-153M

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description
Lumapro	15W	15PAR30/LED/DIM/50/NFL	PAR30, Cool White, 5000K
	18W	18PAR38/LED/DIM/30/NFL	PAR38, Warm White, 3000K
	18W	18PAR38/LED/DIM/50/NFL	PAR38, Cool White, 5000K
Osram	6W	OSRAM 6W LED A19 270	A19, 2700K, 450 Lumen, E26, 40WE
	6W	OSRAM 6W LED A19 500	A19, 5000K, 450 Lumen, E26, 40WE
Philips	3.5W	9290002417	Candle, 2700K, 150 Lumen, E12 Candelabra base
	3.5W	9290002419	Candle, 2700K, 150 Lumen, E26 medium base, blunt tip clear
	3.5W	3.512BA11DCAAA	Candle, 2700K, 150 Lumen, Candelabra Base
	3.5W	3.5E26B12DCBAAA	Candle, 2700K, 150 Lumen, Medium Base
	3.5W	3.5E26BA12DCBAAA	Candle, 2700K, 150 Lumen, Medium Base
	4.5W	9290002439	Candle, Warm White, 2700K, 320 Lumen, E26 base, Post Light
	4.5W	9290002797†	Candle, 2700K, 330 Lumen, E26, blunt tip
	4.5W	9290002889†	Candle, 2700K, 330 Lumen, E12, blunt tip
	4.5W	9290002890†	A15, 2700K, 330 Lumen, E12
	4.5W	9290002891†	A15, 2700K, 330 Lumen, E26
	6W	9290002242	MR16, 3000K, 300 Lumen, GU10 base
	6W	9290002443	PAR16, 3000K, 300 Lumen, E26
	6.5W	9290011347 (455741)	A19, Warm Glow, 450 Lumen
	7W	9290002020	PAR20, 2700K, 280 Lumen, Medium Base
	7W	7E26A55-E	A19, 2700K, 240 Lumen
	7W	7E26A60	A19 EnduraLED 2700K
	7W	7E26PAR20D-1	PAR20, 2700K, 280 Lumen, Medium Base
	7W	7E26PAR20-E	PAR20, 2700K
	8W	9290002267	A19, 2700K, 470 Lumen
	8W	9290002295	A19, 5000K, 470 Lumen
	8W	9290002329	PAR20, 3000K, 470 Lumen, E26
	8W	9290002330	PAR20
	8W	9290002331	PAR20
	8W	9290002332	PAR20
	8W	9290002333	PAR20
	8W	9290002334	PAR20
	8W	9290002335	PAR20
	8W	8E26A60	A19, 2700K
	8W	9E26A19DCCAAAA	A19, 2700K, 507 Lumen
	8.5W	9290002543	BR30, 5000K, 730 Lumen, 8.5W
	9.5W	9290011345	A19, Soft White, 2200-2700K, 800 Lumen, E26
	10.5W	9290002544	BR30, 2700K, 730 Lumen
	10.5W	9290002707	A19 SlimStyle, Soft White, 2700K, 800 Lumen, 3pk
	11W	9290002268	A19, 2700K, 830 Lumen
	11W	9290002296	A19, 5000K, 830 Lumen
	11W	9290011113	PAR30L, 3000K, ? Lumen, E26
	12W	12E26PAR30L-E2	PAR30, 3000K
	12W	9290002580 (431392)	BR40, 2700K, 800 Lumen
	12.5W	9290001829	A19, 2700K, 908 Lumen
	12.5W	12E26A60	A19, 2700K
	13W	9290002197	BR30, 2700K, 721 Lumen
	13W	9290002201	PAR30, 3000K, 750 Lumen
	13W	9290002233	PAR30, 2700K, 784 Lumen
	13W	9290002234	PAR30, 2700K, 770 Lumen
	13W	9290002323	PAR30, 5000K, 850 Lumen
	13W	9290011120	A21 SlimStyle, 2700K, 1100 Lumen
	13W	13E26B30DAAABAA	BR30, 3000K
	13W	9290002523 13PAR38/F25 3000 DIM AF RO	PAR38, 3000K, 950 Lumen
	14.5W	9290002199	BR40, 2700K, 832 Lumen
	15W	9290002426	A21, 2700K, 1180 Lumen
15W	9290002595	A21, Soft White, 2700K, 1180 Lumen, E26	

† Requires a minimum of 2 lamps

†† Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266J

Dimmable CFL & LED bulbs

Compatible with C•L® dimmers

List Updated August 4, 2015
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Maestro® C•L dimmers

Maestro C•L: MACL-153M

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description
Philips	17W	9290002018	A21, 2700K
	17W	17E26A21D	A21, 2700K
	17W	17E26PAR38-E2	PAR38, 3000K
	18W	9290002202	PAR38, 3000K, 951 Lumen, Medium Base
	18W	9290002236	PAR38
	18W	9290002237	PAR38
	18W	9290002245	PAR38, 2700K, 938 Lumen
	18W	9290002246	PAR38
	18W	9290002307	PAR38
	18W	9290002308	PAR38
	18W	9290002309	PAR38
	18W	9290002310	PAR38
	18W	9290002311	PAR38
	18W	18E26PAR38-3	PAR38
	18W	18E26PAR38-4	PAR38
	18W	18E26PAR38D-2	PAR38, 2700K
	19W	9290002473	PAR38, 3000K, 1250 Lumen
	19.5W	9290002251	PAR38, 3000K, 1210 Lumen
	19.5W	9290002252	PAR38, 2700K, 1183 Lumen
	19.5W	9290002253	PAR38, 3000K, 1212 Lumen
	19.5W	9290002291	PAR38, 4000K, 1207 Lumen
	19.5W	9290002312	PAR38, 2700K, 1100 Lumen
	19.5W	9290002313	PAR38, 2700K, 1196 Lumen
	19.5W	9290002314	PAR38, 3000K, 1200 Lumen
	19.5W	9290002315	PAR38, 3000K, 1225 Lumen
	19.5W	9290002316	PAR38, 4000K, 1200 Lumen
	19.5W	9290002317	PAR38, 4000K, 1245 Lumen
19.5W	9290002321	PAR38, 2700K, 1172 Lumen	
19.5W	9290002322	PAR38, 5000K, 1300 Lumen	
22W	9290002290	A21, 2700K, 1780 Lumen, Medium base	
Satco	7W	S8827 thru S8838	PAR30
	8W	S8794	A19, 2700K, 450 Lumen, GU10
	8W	S8995	A19, 3000K, 450 Lumen
	8W	S9040-S9042	do not publish
	9W	S8991	4" Downlight
	11W	S8993-S8994	BR30, 3000K, Medium and GU24 bases
	11W	S9043-S9045	BR30, various color temperatures
	11W	S9084	PAR30, 3000K, 780 Lumen, E26, short neck, 25° Beam
	11W	S9085	PAR30, 4000K, 780 Lumen, E26, short neck, 25° Beam
	11W	S9086	PAR30, 3000K, 780 Lumen, E26, short neck, 40° Beam
	11W	S9087	PAR30, 4000K, 780 Lumen, E26, short neck, 40° Beam
	11W	S9088	PAR30, 3000K, 780 Lumen, E26, long neck, 25° Beam
	11W	S9089	PAR30, 4000K, 780 Lumen, E26, long neck, 25° Beam
	11W	S9090	PAR30, 3000K, 780 Lumen, E26, long neck, 40° Beam
	11W	S9091	PAR30, 4000K, 780 Lumen, E26, long neck, 40° Beam
	13W	S9003	R40, 3000K, 880 Lumen
	13W	S9046	R40, 2700K, 850 Lumen
	13W	S9047	R40, 4000K, 920 Lumen
	13W	S9048	R40, 5000K, 950 Lumen
	14W	S8814 thru S8819	PAR30
	14W	S8821 thru S8826	PAR30
	14W	S8947-S8949	PAR30 Longneck
	14W	S8971-S8973	PAR30 Longneck
	17W	S8852 thru S8859	PAR38
	17W	S8861 thru S8864	PAR38
	17W	S8977-S8979	PAR38
	17W	S8984-S8986	PAR38
17W	S9092	PAR38, 3000K, 1200 Lumen, E26, 25° beam	

† Requires a minimum of 2 lamps

†† Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266J

Dimmable CFL & LED bulbs

Compatible with C•L® dimmers

List Updated August 4, 2015
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Maestro® C•L dimmers

Maestro C•L: MACL-153M

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description
Satco	17W	S9093	PAR38, 4000K, 1200 Lumen, E26, 25° beam
	17W	S9094	PAR38, 3000K, 1200 Lumen, E26, 40° beam
	17W	S9095	PAR38, 4000K, 1200 Lumen, E26, 40° beam
Solais	7W	LRP20/25/27K	PAR20, 2700K, 475 Lumen, E26, 25° Beam
	7W	LRP20/25/30K	PAR20, 3000K, 500 Lumen, E26, 25° Beam
	7W	LRP20/40/27K	PAR20, 2700K, 475 Lumen, E26, 40° Beam
	7W	LRP20/40/30K	PAR20, 3000K, 500 Lumen, E26, 40° Beam
	11W	LR20/25/27K/675/xx	PAR20, 2700K, 675 Lumen, E26, narrow flood
	11W	LR20/25/30K/750	PAR20, 3000K, 750 Lumen, E26, narrow flood
	11W	LR20/40/27K/675/xx	PAR20, 2700K, 675 Lumen, E26, wide flood
	11W	LR20/40/30K/750/xx	PAR20, 3000K, 750 Lumen, E26, wide flood
	16W	LR30/10/27K/1100/xx	PAR30, 2700K, 1100 Lumen, E26, short neck, 10° Beam
	16W	LR30/10/30K/1125/xx	PAR30, 3000K, 1125 Lumen, E26, short neck, 10° Beam
	16W	LR30/10/30K/1200/xx	PAR30, 3000K, 1200 Lumen, E26, short neck, 10° Beam
	16W	LR30/15/27K/1100/xx	PAR30, 2700K, 1100 Lumen, E26, short neck, 15° Beam
	16W	LR30/15/30K/1125/xx	PAR30, 3000K, 1125 Lumen, E26, short neck, 15° Beam
	16W	LR30/15/30K/1200/xx	PAR30, 3000K, 1200 Lumen, E26, short neck, 15° Beam
	16W	LR30/25/27K/1100/xx	PAR30, 2700K, 1100 Lumen, E26, short neck, 25° Beam
	16W	LR30/25/30K/1125/xx	PAR30, 3000K, 1125 Lumen, E26, short neck, 25° Beam
	16W	LR30/25/30K/1200/WH	PAR30, 3000K, 1200 Lumen, E26, short neck, 25° Beam
	16W	LR30/40/27K/1100/xx	PAR30, 2700K, 1100 Lumen, E26, short neck, 40° Beam
	16W	LR30/40/30K/1125/xx	PAR30, 3000K, 1125 Lumen, E26, short neck, 40° Beam
	16W	LR30/40/30K/1200/xx	PAR30, 3000K, 1200 Lumen, E26, short neck, 40° Beam
	16W	LRP38/25/27K	PAR38, 2700K, 1025 Lumen, E26, 25° Beam
	16W	LRP38/25/30K	PAR38, 3000K, 1100 Lumen, E26, 25° Beam
	16W	LRP38/40/27K	PAR38, 2700K, 1025 Lumen, E26, 40° Beam
	16W	LRP38/40/30K	PAR38, 3000K, 1100 Lumen, E26, 40° Beam
	20W	LR38/25/30K/1450/SL	PAR38, 3000K, 1450 Lumen, E26, 15° Beam
	28W	LR38/15/27K/2000/xx	PAR38, 2700K, 2000 Lumen, E26
	28W	LR38/15/30K/2100/xx	PAR38, 3000K, 2100 Lumen, E26
	28W	LR38/25/27K/2000/xx	PAR38, 2700K, 2000 Lumen, E26
28W	LR38/25/30K/2100/xx	PAR38, 3000K, 2100 Lumen, E26	
28W	LR38/40/27K/2000/xx	PAR38, 2700K, 2000 Lumen, E26	
28W	LR38/40/30K/2100/xx	PAR38, 3000K, 2100 Lumen, E26	
Switch	10W	A260FUS27B1	A19, 800 Lumen
	13W	75FU202	A19, 3000K, 1100 Lumen, E26
	6W	79643	A19, Soft White, 2700K, 450 Lumen, E26, clear
	7W	LED7A19/DIM/0/SE/830 (78214)	A19, 3000K to 2000K, 450 Lumen, E26, Sunset Effect
	7W	LED7A19/DIM/0/SE/830/RP (78213)	A19, 3000K to 2000K, 450 Lumen, E26, Sunset Effect
	8W	LED8A/DIM/F/827	A19, 2700K
	8W	LED8A/DIM/F/830	A19, 3000K
	8W	LED8A15/DIM/827†	A15, 2700K, 450 Lumen, Medium Base
	8W	LED8A15C/DIM/827†	A15, 2700K, 450 Lumen, Candelabra Base
	8W	LED8A19DIMO827RP	A19, 2700K, 470 Lumen, E26
	8W	LED8G25/DIM/F/827	G25, 2700K
	8W	LED8G25/DIM/F/830	G25, 3000K
	Sylvania	8W	LED8PAR16/DIM/930/FL36/P/LW
8W		LED8PAR16/GU10/DIM/930/FL36/RP	PAR16, GU10, Soft White, 390 Lumen
8W		LED8PAR20/DIM/827/FL36	PAR 20, 2700K
8W		LED8PAR20/DIM/827/NFL25	PAR 20, 2700K
8W		LED8PAR20/DIM/830/FL36	PAR 20, 3000K
8W		LED8PAR20/DIM/830/NFL25	PAR 20, 3000K
8W		LED8R20/DIM/SE/830/RP	R20, Soft White, 2700K to 2000K, 520 Lumen
9W		LED/550/RT4/827/FL80/WRFL	4" Downlight, 2700K
9W		LED/550/RT4/830/FL80/WRFL	4" Downlight, 3000K

† Requires a minimum of 2 lamps

†† Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266J



Dimmable CFL & LED bulbs

Compatible with C•L® dimmers

List Updated August 4, 2015
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Maestro® C•L dimmers

Maestro C•L: MACL-153M

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description
Sylvania	10W	LED/600/RT4/830/FL80/RP	Recessed lighting kit, 3000K, 600 Lumen
	10W	LED/RT4/600/827/FL80	Recessed lighting kit, 2700K, 600 Lumen
	10W	LED10A19/DIM/0/SE/830	A19, 3000K, 800 Lumen
	10W	LED10A19/DIM/0/SE/830/RP (78215)	A19, 3000K, 800 Lumen
	10W	LED10PAR20/DIM/P/930/FL30	PAR20, 3000K, 550 Lumen
	10W	LED10PAR30/DIM/SG/827/NFL25	PAR 30, 2700K
	10W	LED10PAR30/DIM/SG/827/SP10	PAR 30, 2700K
	10W	LED10PAR30/DIM/SG/827/WSP15	PAR 30, 2700K
	10W	LED10PAR30/DIM/SG/830/NFL25	PAR 30, 3000K
	10W	LED10PAR30/DIM/SG/830/SP10	PAR 30, 3000K
	10W	LED10PAR30/DIM/SG/830/WSP15	PAR 30, 3000K
	10.5W	LED10A19/DIM/CL/O/827 (79146)	A19, 2700K, 800 Lumen, E26, 60WE
	10.5W	LED10A19/DIM/CL/O/827/BL (79147)	A19, 2700K, 800 Lumen, E26, 60WE
	10.5W	LED10A19/DIM/CL/O/827/G4 (79142)	A19, 2700K, 800 Lumen, E26, 60WE
	10.5W	LED10A19/DIM/CL/O/827/G4/BL (79143)	A19, 2700K, 800 Lumen, E26, 60WE
	10.5W	LED10A19/DIM/CL/O/827/RP (79644)	A19, 2700K, 800 Lumen, E26, 60WE
	10.5W	LED10A19/DIM/CL/O/850/G4 (79144)	A19, 5000K, 800 Lumen, E26, 60WE
	10.5W	LED10A19/DIM/CL/O/850/G4/BL (79145)	A19, 5000K, 800 Lumen, E26, 60WE
	11W	LED/625/RT6/830†	6" Downlight
	11W	LED11BR30/DIM/HO/827/G3 (78413)	BR30, 2700K, 800 Lumen, E26
	11W	LED11BR30/DIM/HO/827/G3/RP (78415)	BR30, 2700K, 800 Lumen, E26
	11W	LED11BR30/DIM/HO/827/G3/RP (79121)	BR30, 2700K, 800 Lumen, E26
	12W	LED12BR30/DIM/HO/827	BR30, 2700K, Medium base
	12W	LED12BR30/DIM/HO/827/HVP	BR30, 2700K, Medium base
	12W	LED12BR30/DIM/SE/830/RP	BR30, Soft White, 2700K to 2000K, 850 Lumen
	15W	LED15BR30/DIM/827	BR30 2700K
	15W	LED15BR40/DIM/HO/827/G3/RP	BR40, Soft White, 2700K, 1100 Lumen, E26, Flood
	15W	LED15PAR30/DIM/P/930/FL40	PAR30, 3000K
	15W	LED15PAR30LN/DIM/827/FL40	PAR30, 2700K
	15W	LED15PAR30LN/DIM/830/NFL25	PAR30, 3000K
	16W	LED16BR40DIMHO827	BR40, 2700K, 1100Lumen
	17W	LED17PAR30LN/DIM/830/WSP15/P	PAR30, 3000K, 1200 Lumen, E26, spot
17W	LED17PAR30LN/DIM/830/WSP20	PAR30, 3000K, 1200 Lumen, E26, wide spot	
17W	LED17PAR30LN/DIM/P/930/NFL25	PAR30, 3000K, 900 Lumen	
18W	LED18PAR38/DIM/827/NFL25	PAR38, 2700K, 860 Lumen	
20W	LED20PAR38/DIM/930/FL40/P2	PAR38, 3000K, 1000 Lumen,	
20W	LED20PAR38DIM830FL40	PAR38, 3000K, 1300 Lumen	
21W	LED21/PAR38/DIM/P/930/FL30/HVP	PAR38, Warm White, 3000K, 1100 Lumen, E26, 21W	
21W	LED21PAR38/DIM/P/930/FL30	PAR38, 3000K, 1100 Lumen	
Toshiba	13W	LDRB1327WE6USD2 (13BR40/27K-T)	BR40, 2700K, 950 Lumen
	13W	LDRB1340WE6USD2 (13BR40/40L-T)	BR40, 4000K, 1050 Lumen
Utilitech	3W	LG161/2DM/IF/LED	G16.5, Warm White, 3000K, 200 Lumen, E12 base, frosted
	3.5W	LCFCDM/LED†	Candle, Flame Tip Clear, 3000K, Candelabra Base

† Requires a minimum of 2 lamps

†† Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266J

Dimmable CFL & LED bulbs

Compatible with C•L® dimmers

List Updated August 4, 2015
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Maestro® C•L dimmers

Maestro C•L: MACL-153M

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description
	3.5W	LEFCDM/LED†	Candle, Flame Tip Clear, 3000K, Medium Base
	4.5W	LR14DMLED	R14, Soft White, 2700K, 300 Lumen, E26, 40WE
	4.8W	LA15DM/CL/300/LED	A15, Warm White, 3000K, 300 Lumen, E26, clear
	4.8W	LA15DM/IF/300/LED	A15, Warm White, 3000K, 300 Lumen, E26, frosted
	4.8W	LA15DMC/CL/300/LED	A15, Warm White, 3000K, 300 Lumen, E12 base, clear
	4.8W	LCFCDM/300/LED	Candle, Warm White, 3000K, 300 Lumen, E12 base, clear flame tip
	4.8W	LCFFDM/300/LED	Candle, Warm White, 3000K, 300 Lumen, E12 base, frosted flame tip
	4.8W	LEFCDM/300/LED	Candle, Warm White, 3000K, 300 Lumen, E26 base, clear flame tip
	4.8W	LG161/2DM/CL/300/LED	G16.5, Warm White, 3000K, 300 Lumen, E12 base, clear
	4.8W	LG161/2DM/IF/300/LED	G16.5, Warm White, 3000K, 300 Lumen, E12 base, frosted
	4.8W	LGMDM/CL/300/LED	G16.5, Warm White, 3000K, 300 Lumen, E26, clear
	5W	LMR16GU10DM/LED	MR16, GU10 Base
	6.5W	LMR16/GU10/DM/LED	MR16, GU10 base
	6.5W	LMR16DMGU10	MR16, GU10 base
	6.5W	LR16DMLED	R16, Soft White, 2700K, 400 Lumen, E26, 40WE
	7.5W	LA19DM/GU24/LED	A19, 3000K, GU24
	7.5W	LA19DM/LED	A19, 3000K, 450 Lumen, E26
	7.5W	LA19DM/LEDG2	A19, 3000K, 450 Lumen
	7.5W	LPAR20DM/5K/LED	PAR20, 5000K
	7.5W	LPAR20DM/LED	PAR20, 3000K
	8W	LA19DM/5K/LED	A19, 5000K
	8W	LG25DM/LEDG2	G25, Warm White, 3000K, 510 Lumen, E26
	8W	LR20DM/LED†	R20, 2700K, 450 Lumen (90mA ridged reflector version)
	9W	LR20HO/LED/G2	R20, Soft White, 650 Lumen, E26, flood
	9W	R20HO/LED/G2	R20, Soft White, 650 Lumen, E26, flood
	9.5W	LPAR20/5K/LEDG5	PAR20, 5000K, 500 Lumen
	9.5W	LPAR20/LEDG5	PAR20, 3000K, 450 Lumen
	9.5W	LPAR20DM/SP/LED	PAR20, 3000K, 465 Lumen, Spot
	9.8W	LA19DM/800/LED/G2	A19, 3000K, 800 Lumen
	10W	LA19DM/800/5K/LEDG2	A19, 5000K
	10W	LA19DM/800/LEDG2	A19, 3000K, 800 Lumen
	10W	LG25/DM/LED†	G25, 3000K
	11W	DLS02-04A27D1E-WH-F1	4" Downlight, 2700K, 600 Lumen, E26 retrofit
	11W	DLS02-04A27D1E-WH-F2	4" Downlight, 2700K, 600 Lumen, E26 retrofit 2pk
	11W	DLS02-06A27D1E-WH-F2	5" or 6" Downlight, 2700K, 700 Lumen, E26 retrofit 2pk
	11W	DLS02-41127D1E-WF1	4" Downlight, Soft White, 2700K, 650 Lumen, E26 retrofit
	12W	LPAR30L/LEDG7/2	PAR30L, 3000K, 800 Lumen, E26, long neck, 2PK
	13W	DLS02-06A50D1E-WH-F1	5" or 6" Downlight, 5000K, 700 Lumen, E26 retrofit
	13W	LBR30DM/LEDG2	BR30
	13.5W	LA19/OM800/LED	A19, 3000K, 800 Lumen, Omni Directional
	13.5W	LA19DM/800/LED	A19, 3000K
	15W	LBR30HO/LED/G2	BR30, Soft White, 1150 Lumen
	15W	LPAR30L/5K/LEDG5	PAR30, 5000K, 800 Lumen, long neck flood
	15W	LPAR30L/LEDG5	PAR30, 3000K, 790 Lumen, long neck flood
	15W	LPAR30LDM/SP/LED	PAR30, 3000K, 790 Lumen, long neck, spot
	15W	LPAR30S/LEDG5	PAR30, 3000K, 750 Lumen, short neck flood
	16W	LA19/OM1100R/LED	A19, 3000K, 1100 Lumen, Omni Directional
	16W	LBR40DMLEDG2	BR40, 2700K, 1065 Lumen
	16W	LPAR38LEDG72	PAR38, 3000K, 950 Lumen, 2PK
	17W	BPCEBR40/DM/LED†	BR40
	17W	LBR40DM/LED†	BR40, 2700K, 1065 Lumen
	18W	LPAR38DM/5K/LED	PAR38, 5000K
	18W	LPAR38DM/LED	PAR38, 3000K
	20W	L20PAR38/LEDG5	PAR38, 3000K, 1000 Lumen, flood
	20W	LBR40HO/LED/G2	BR40, Soft White, 1400 Lumen
	20W	LPAR38/5K/LEDG5	PAR38, 5000K, 1000 Lumen, flood
	20W	LPAR38/LEDG5	PAR38, 3000K, 1000 Lumen, flood

Utilitech

† Requires a minimum of 2 lamps
†† Requires a minimum of 3 lamps
© Lutron Electronics Co., Inc. | PN 368-3266J

Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated August 4, 2015
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Maestro[®] C•L dimmers

Maestro C•L: MACL-153M

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description
Utilitech	20W	LPAR38DM/SP/LED	PAR38, 3000K, 1000 Lumen, Spot
	20.5W	LPAR381400LEDG72	PAR38, 1450 Lumen, 2PK
	22W	LA/OM1600R/5K/LED	A21, Daylight, 5000K, 1600 Lumen
	22W	LA/OM1600R/LED	A21, Warm White, 3000K, 1600 Lumen
	23W	LPAR38/1400/5K/LEDG5	PAR38, 5000K, 1400 Lumen
	23W	LPAR38/1400/LEDG5	PAR38, 3000K, 1400 Lumen
Westinghouse	8W	8A19/LED/DIM/30	A19, Warm White, 3000K
	8W	8A19/LED/DIM/50	A19, Cool White, 5000K
	8W	8PAR20/LED/DIM30/NFL	PAR20, Warm White, 3000K
	8W	8PAR20/LED/DIM50/NFL	PAR20, Warm White, 5000K
	15W	15PAR30/LED/DIM/30/NFL	PAR30, 3000K
	15W	15PAR30/LED/DIM/50/NFL	PAR30, 5000K
	18W	18PAR38/LED/DIM/30/NFL	PAR38, 3000K
	18W	18PAR38/LED/DIM/50/NFL	PAR38, 5000K

† Requires a minimum of 2 lamps

†† Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266J

Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated August 4, 2015
For the most up-to-date list, visit
www.lutron.com/dimcflled



CFL bulbs for Maestro[®] C•L dimmers

Maestro C•L: MACL-153M

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description
EcoSmart	5W	8TC05 [†]	Candle, (ES5CCDF052, ES9CCDF052)
	5W	8TC05F [†]	Candle, Torpedo Tip, 2700K, 200 Lumen
	5W	8TFC05F [†]	Candle, Flame Tip, 2700K, 200 Lumen
	11W	BPESL11R20/DM/ESM	R20, Soft White
	14W	40114	Spiral, Soft White (ES5M814DIM2, ES9M814DIM2)
	14W	2R2014DIM	R20, 2700K, 410 Lumen
	15W	2R3015DIM	R30 Flood, Soft White (ES5R315DIM2)
	15W	2R3015DIM35K	R30 Flood, Bright White (ES5R315DIM35K)
	15W	2R3015DIM50K	R30 Flood, Daylight (ES5R315DIM250K)
Feit	23W	40123	Spiral, Soft White (ES5M823DIM2)
	11W	BPESL11R20/DM	R20
	15W	BPESL15T/DM	Spiral
	23W	BPESL23R40/DIM	R40
GE	23W	BPESL23T/DM	Spiral
	26W	FLE26/2/DVR/40	R40
Philips	26W	FLE26HT3/2/DV/SW	Spiral
	20W	EL/A R40 Dim 20W	R40
Sylvania	5W	CF5EL/B10/827/L/DIM [†]	Candle
	5W	CF5EL/B10C/DIM/827/ADP [†]	Candle
	5W	CF5EL/DEC/DIM [†]	Candle
	14W	CF14EL/TWIST/DIM	Spiral
	24W	CF24EL/TWIST/DIM	Spiral
TCP	5W	8TC05F [†]	Candle
	5W	8TFC05F [†]	Candle, flame tip
	14W	40114	Spiral
	14W	2R2014DIM	R20, 2700K, 410 Lumen
	14W	4R2014TD	R20, TruDim, 2700K
	14W	4R2014TD30K	R20, TruDim, 3000K
	14W	4R2014TD35K	R20, TruDim, 3500K
	14W	4R2014TD41K	R20, TruDim, 4100K
	14W	4R2014TD50K	R20, TruDim, 5000K
	14W	4R2014TD65K	R20, TruDim, 6500K
	15W	2R3015DIM	R30, Soft White, 2700K
	16W	4R3016TD	R30, TruDim, 2700K
	16W	4R3016TD30K	R30, TruDim, 3000K
	16W	4R3016TD35K	R30, TruDim, 3500K
	16W	4R3016TD41K	R30, TruDim, 4100K
	16W	4R3016TD50K	R30, TruDim, 5000K
	16W	4R3016TD65K	R30, TruDim, 6500K
	Utilitech	23W	40123
11W		LBP11R20DM	R20, Soft White, 2700K
15W		LBP15TDM	Spiral
23W		LBP23R40DM	R40
23W		LBP23TDM	Spiral

[†] Requires a minimum of 2 lamps

^{††} Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266J

Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated August 4, 2015
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for wall-mounted C•L dimmers

Diva[®] C•L: DVWCL-153P, DVCL-153P, DVSCCL-153P
Skylark Contour[®] C•L: CTCL-153P
Skylark[®] C•L: LGCL-153PH
Lumea[®] C•L: LGCL-153PH
Toggler[®]/Ariadni[®] C•L: TGCL-153P, AYCL-153P



Maximum wattage controlled: 150W

Brand	Wattage	Model	Description
Commercial Electric	12.5W	CE-JB4-600L-27K (T47)	4" Downlight, 600 Lumen, Soft White, 2700K
	12.5W	CE-JB6-650L-27K (T67)	6" Downlight, 650 Lumen, Soft White, 2700K
	14.5W	CED6 WW 120 WH	6" Downlight, White
Cooper	14.6W	AP706830WBST24 (ALED3T24)	All-Pro™ 5 or 6" Retrofit Module & Trim
	14.6W	RL706830E26WBS	All-Pro 5 or 6" Retrofit Module & Trim
	14.6W	RL706830WBS	All-Pro 6" Retrofit Module & Trim w/ High-Efficacy Connector
Cree	6W	BA19-04527OMF-12DE26-1U100	A19, Warm Soft White, 2700K, 450 Lumen, Medium base
	6W	BA19-04527OMF-12DE26-2U100	A19, Warm Soft White, 2700K, 450 Lumen, Medium base
	6W	BA19-04527OMF-12DE26-3U100	A19 4Flow, 2700K, 460 Lumen, E26
	6W	BA19-04550OMF-12DE26-2U500	A19, 5000K, 450 Lumen, 40WE, 4pk
	6W	BA19-04550OMF-12DE26-3U100	A19 4Flow, 5000K, 460 Lumen, E26
	9.5W	BA19-08027OMF-12DE26-2U100	A19, Soft White, 2700K, 800 Lumen, Medium base
	9.5W	BA19-08027OMF-12DE26-2U500	A19, 2700K, 800 Lumen, E26, 60WE, 4pk
	9.5W	BBR30-06527FLF-12DE26-1U100	BR30, 650 Lumen, Soft White, 2700K
	9.5W	BBR30-06550FLF-12DE26-1U100	BR30, Daylight, 5000K 650 Lumen, 9.5W
	9.5W	CR4-575L	4" Downlight, 2700K, 575 Lumen, Medium Base
	9.5W	CR6-575L	6" Downlight, 2700K, Medium Base
	9.5W	CR6-575L-GU24	6" Downlight, 2700K, GU24 Base
	9.5W	H1CR6TW62527E04	6" Downlight, 2700K, 625 Lumen
	12.5W	DRDL6-06227009-12DE26-1C100	6" Downlight, 2700K TW, 625 Lumen, E26 retrofit
	12.5W	DRDL6-06250009-12DE26-1C100	6" Downlight, 5000K TW, 625 Lumen, E26 retrofit
	18W	BA21-16027OMF-12DE26-1U100	A21, 2700K, 1600 Lumen, E26, 18W
	18W	BA21-16050OMF-12DE26-1U100	A21, 5000K, 1600 Lumen, E26, 18W
	18W	BPAR38-1503027T-12DE26-1U100	PAR38, 3000K, 1500 Lumen, 27 deg spot
18W	BPAR38-1503047T-12DE26-1U100	PAR38, 3000K, 1500 Lumen, 47 deg flood	
EcoSmart	4W	ECS B11 CA W27 25WE CL E26 120 DG	B11, 2700K, 200 Lumen, E26
	6W	ECS 25 40WE W27 120 DG [†]	G25, 2700K, 400 Lumen, E12
	6W	ECS GP19 WW 40WE 120	A19, 3000K
	7W	ECS 25 60WE W27 120 DG [†]	G25, 2700K, E12
	7.5W	BPA15/CL/500/LED/ESM	A15, Soft White, 2700K, 500 Lumen, E26
	7.5W	BPA15C/CL500/LED/ESM	A15, Soft White, 2700K, 500 Lumen, E12
	7.5W	BPCFC/500/LED/ESM	B10, Soft White, 2700K, 500 Lumen, E12
	7.5W	BPEFC/500/LED/ESM	B10, Soft White, 2700K, 500 Lumen, E26
	7.5W	BPGM/CL/500/LED/ESM	G16.5, Soft White, 2700K, 500 Lumen, E26
	8W	ECS 19 CW 120	A19, Cool White, 5000K
	8W	ECS 19 WW 120	A19, Warm White, 3000K
	8W	ECS 20 CW FL 120	PAR20, Daylight, 5000K, 490 Lumen
	8W	ECS 20 CW FL 50WE 120 [†]	PAR20, 5000K, 490 Lumen
	8W	ECS 20 WW FL 120	PAR20, Warm White, 3000K
	8W	ECS 20 WW FL 50WE 120 [†]	PAR20, 3000K, 450 Lumen
	8W	ECS 25 WW 120	G25, Warm White, 3000K
	8W	ECS A19 CW 40WE 120 [†]	A19, 5000K, 480 Lumen
	8W	ECS A19 V1 CW 120	A19, Daylight, 5000K
	8W	ECS A19 V1 WW 120	A19, Warm White, 3000K
	8W	ECS A19 WW 40WE 120 [†]	A19, 3000K, 450 Lumen
	8W	ECS BR20 50WE CW 120 DG [†]	BR20, Daylight, 5000K, 600 Lumen, E26
	8W	ECS BR20 50WE W27 120 [†]	BR20, Soft White, 2700K
	8W	ECS BR20 50WE WW 120 DG [†]	BR20, Warm White, 3000K, 550 Lumen, E26
9.5W	ECO4-575L	4" Downlight, 2700K, 575 Lumen, Medium Base	
9.5W	ECO4-575L-50K	4" Downlight, 5000K, 575 Lumen, Medium Base	
9.5W	ECO4-575L-50K-GU24	4" Downlight, 5000K, GU24 Base	

† Requires a minimum of 2 lamps
†† Requires a minimum of 3 lamps
© Lutron Electronics Co., Inc. | PN 368-3266J

Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated August 4, 2015
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for wall-mounted C•L dimmers

Diva[®] C•L: DVWCL-153P, DVCL-153P, DVSCCL-153P
Skylark Contour[®] C•L: CTCL-153P
Skylark[®] C•L: LGCL-153PH
Lumea[®] C•L: LGCL-153PH
Toggler[®]/Ariadni[®] C•L: TGCL-153P, AYCL-153P



Maximum wattage controlled: 150W

Brand	Wattage	Model	Description
EcoSmart	9.5W	ECO-575L	6" Downlight, 2700K, Medium Base
	9.5W	ECO-575L-50K	6" Downlight, 5000K, Medium Base
	9.5W	ECO-575L-50K-GU24	6" Downlight, 5000K, GU24 Base
	9.5W	ECO-575L-GU24	6" Downlight, 2700K, GU24 Base
	9.5W	ECS DN4 CW E26 120	4" Downlight, Daylight, 5000K, 650 Lumen, E26, retrofit
	9.5W	ECS DN4 CW GU24 120	4" Downlight, Daylight, 5000K, 650 Lumen, Gu24 base, retrofit
	9.5W	ECS DN4 W27 E26 120	4" Downlight, Soft White, 2700K, 650 Lumen, E26 retrofit
	9.5W	ECS DN4 W27 GU24 120	4" Downlight, Soft White, 2700K, 650 Lumen, GU24 base, retrofit
	9.5W	ECS DN6 CW GU24 120	6" Downlight, Daylight, 5000K, 650 Lumen, Gu24 base, retrofit
	9.5W	ECS DN6 W27 E26 120	6" Downlight, Soft White, 2700K, 650 Lumen, E26 retrofit
	9.5W	ECS DN6 W27 E26 120 2BX	6" Downlight, Soft White, 2700K, E26 retrofit, 2pk
	9.5W	ECS DN6 W27 E26 120 BX V3	6" Downlight, Soft White, 2700K, 650 Lumen, E26 retrofit
	9.5W	ECS DN6 W27 GU24 120	6" Downlight, Soft White, 2700K, 650 Lumen, GU24 base, retrofit
	10W	ECS BR30 65WE CW 120 DG [†]	BR30, Daylight, 5000K, 700 Lumen, E26
	10W	ECS BR30 65WE CW 120 DG 3PK [†]	BR30, Daylight, 5000K, 700 Lumen, E26, 3pk
	10W	ECS BR30 65WE W27 120 DG [†]	BR30, Soft White, 2700K, 650 Lumen, E26
	10W	ECS BR30 65WE W27 120 DG 3BX [†]	BR30, Soft White, 2700K, 650 Lumen, E26, 3pk
	10W	ECS BR30 65WE WW 120 DG [†]	BR30, Warm White, 3000K, 650 Lumen, E26
	10.5W	ECS 30 75WE WW GB FL 120	PAR30 Gimbal, 3000K, 750 Lumen, E26, 75WE
	10.5W	ECS 30 75WE xxx GB xx 120	PAR30 Gimbal, Various color temperatures, 75WE
	11W	ECS RFK6 65WE W27 120 REC [†]	Downlight, Soft White, 2700K, 600 Lumen, E26
	13W	ECS A19 V2 CW 120	A19, Daylight, 5000K
	13W	ECS A19 V2 WW 120	A19, Warm White, 3000K
	15W	ECS 38 CW FL 90WE 120	PAR38, 5000K, 970 Lumen
	15W	ECS 38 WW FL 90WE 120	PAR38, 3000K, 900 Lumen
	15W	ECS BR30 75WE CW 120 G1 BL	BR30, Daylight, 5000K, 985 Lumen, E26
	15W	ECS BR30 75WE W27 120 G1 3PK	BR30, Soft White, 2700K, 940 Lumen, E26, 3pk
	15W	ECS BR30 75WE W27 120 G1 BL	BR30, Soft White, 2700K, 940 Lumen, E26
	15W	ECS BR30 W27 FL 120	BR30, Soft White, 2700K
	16W	ECS 38 90WE WW FL 120 TP	PAR38, Bright White, 3000K, 1000 Lumen, E26
	16W	ECS BR40 W27 FL 120	BR40, Soft White, 2700K
	17W	ECS 30 V2 WW FL 120	PAR30, Warm White, 3000K
	18W	ECS 38 CW FL 120	PAR38, Daylight, 5000K
18W	ECS 38 WW FL 120	PAR38, Warm White, 3000K	
19W	ECS 38 120WE WW FL 120 TP	PAR38, Bright White, 3000K, 1300 Lumen, E26	
24W	ECS 38 V2 WW FL 120	PAR38, Warm White, 3000K	
Energetic	17.5W	ELY17D-2BRW-VB	BR40, 2700K, 1100 Lumen
Feit	4.5W	R14DM/LED	R14, Soft White, 2700K, 300 Lumen, E26, 40WE
	4.8W	CFCDM/300/LED [†]	Candle, 3000K, 310 Lumen, Candelabra Base
	4.8W	EFCDM/300/LED [†]	Candle, 3000K, 310 Lumen, Medium Base
	6.5W	BPMP16/GU10/DM/LED [†]	MR16, GU10 base
	6.5W	MR16/GU10/DM/LED [†]	MR16, GU10 base
	6.5W	R16DM/LED	R16, Soft White, 2700K, 400 Lumen, E26, 40WE
	7.5W	PAR20DM/5K/LED	PAR20, 5000K
	7.5W	PAR20DM/LED	PAR20, 3000K
	8W	A19/DM/GU24/LED	A19, 3000K, GU24 Base
	8W	A19/DM/LED	A19, 3000K
	8W	A19/DM/LED/CAN	A19
8W	A19/DM/LED/RP/CAN	A19	
8W	A19DM/5K/LED	A19, 5000K	

[†] Requires a minimum of 2 lamps

^{††} Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266J



Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated August 4, 2015
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for wall-mounted C•L dimmers

Diva[®] C•L: DVWCL-153P, DVCL-153P, DVSCCL-153P
Skylark Contour[®] C•L: CTCL-153P
Skylark[®] C•L: LGCL-153PH
Lumea[®] C•L: LGCL-153PH
Toggler[®]/Ariadni[®] C•L: TGCL-153P, AYCL-153P



Maximum wattage controlled: 150W

Brand	Wattage	Model	Description
Feit	8W	BPCEA19/DM/LED	A19
	8W	BPCER20/DM/LED	R20 (90mA ridged reflector version)
	8W	BPCER20/DM/LED	R20, 2700K, 450 Lumen, E26 Medium base (70 mA smooth reflector version)
	8W	R20/927/LED	R20, 2700K
	8W	R20/930/LED	R20, 3000K
	8W	R20/950/LED	R20, 5000K,
	8W	R20/DM/LED	R20, 2700K, 450 Lumen (90mA ridged reflector version)
	8W	R20DM/LED/CAN	R20 (90mA ridged reflector version)
	8W	R20DM/LEDG2/CAN	R20, 2700K
	9.5W	BPCER20/DM/LED	PAR20
	9.5W	PAR20/5K/LEDG5	PAR20, 5000K
	9.5W	PAR20/5K/LEDG5/CAN	PAR20, 5000K
	9.5W	PAR20/LEDG5	PAR20, 3000K, 450 Lumen
	9.5W	PAR20/LEDG5/CAN	PAR20
	10W	BPAG800/5K/LED	A19, 5000K
	10W	BPAG800/LED	A19, 3000K, 800 Lumen
	10W	G25/DM/LED	G25, 3000K
	13W	BPCEBR30LED	BR30
	13.5W	A19/OM800/5K/LED	A19, 5000K, Omni Directional
	13.5W	A19/OM800/LED	A19, 3000K, Omni Directional
	13.5W	A19DM/800/LED	A19, 3000K
	13.5W	BPCEA19/OM800/LED	A19, Omni Directional
	13.5W	BPCEA19/OM800/LED/CAN	A19, Omni Directional
	14W	LEDR56/830	Downlight, 3000K, 925 Lumen, retrofit kit
	15W	BPCEPAR30/LEDG5	PAR30
	15W	PAR30L/5K/LEDG5	PAR30, 5000K
	15W	PAR30L/5K/LEDG5/CAN	PAR30, 5000K
	15W	PAR30L/LEDG5	PAR30
	15W	PAR30L/LEDG5/CAN	PAR30
	16W	A19/OM1100R/LED	A19, 3000K, 1100 Lumen, Omni Directional
	16.8W	LEDR56/3K	5" or 6" Downlight, 3000K, 840 Lumen
	17W	BPCEBR40/LED	BR40, 2700K, 1065 Lumen
	18W	18PAR38/DM/LED	PAR38, 3000K
	18W	PAR38DM/5K/LED	PAR38, 5000K
	18W	PAR38DM/LED	PAR38, 3000K
	20W	20PAR38/LEDG5	PAR38
	20W	BPCEPAR38/LEDG5	PAR38
	20W	PAR38/5K/LEDG5	PAR38, 5000K
	20W	PAR38/5K/LEDG5/CAN	PAR38, 5000K
	20W	PAR38/LEDG5	PAR38
	20W	PAR38/LEDG5/CAN	PAR38
	20.5W	LEDR56/827	5" or 6" Downlight, 2700K, 1245 Lumen
	22W	A/OM1600R/27K/LED	A21, 2700K, 1600 Lumen
	22W	A/OM1600R/5K/LED	A21, Daylight, 5000K, 1600 Lumen
	22W	A/OM1600R/LED	A21, Warm White, 3000K, 1600 Lumen
GE	7W	LED7DP20B827/20	PAR20, 2700K, Flood, Black Base
	7W	LED7DP20B830/12	PAR20, 3000K, Spot, Black Base
	7W	LED7DP20B830/20	PAR20, 3000K, Flood, Black Base
	7W	LED7DP20S827/20	PAR20, 2700K, Flood, Silver Base
	7W	LED7DP20S830/20	PAR20, 3000K, Flood, Silver Base
	7W	LED7DP20W827/20	PAR20, 2700K, Flood, White Base
	7W	LED7DP20W830/12	PAR20, 3000K, Spot, White Base
	7W	LED7DP20W830/20	PAR20, 3000K, Flood, White Base
	8W	LED8DA19/827	A19, 2700K, 450 Lumen, E26

† Requires a minimum of 2 lamps
†† Requires a minimum of 3 lamps
© Lutron Electronics Co., Inc. | PN 368-3266J

Dimmable CFL & LED bulbs

Compatible with C•L® dimmers

List Updated August 4, 2015
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for wall-mounted C•L dimmers

Diva® C•L: DVWCL-153P, DVCL-153P, DVSCCL-153P
Skylark Contour® C•L: CTCL-153P
Skylark® C•L: LGCL-153PH
Lumea® C•L: LGCL-153PH
Toggler®/Ariadni® C•L: TGCL-153P, AYCL-153P



Maximum wattage controlled: 150W

Brand	Wattage	Model	Description	
GE	10W	LED10DP30S827/20	PAR30, 2700K, Short Neck, Silver Base	
	10W	LED10DP30S830/20	PAR30, 3000K, Short Neck, Silver Base	
	10W	LED10DP30W827/20	PAR30, 2700K, Short Neck, White Base	
	10W	LED10DP3LS827/20	PAR30, 2700K, Long Neck, Silver Base	
	10W	LED10DP3LS830/20	PAR30, 3000K, Long Neck, Silver Base	
	11W	LED11DA19RVL/TP†	A19, 2700K, 570 Lumen	
	11W	LED11DA19V2†	A19, 2700K, 800 Lumen	
	12W	LED12DR30RVL/BK	BR30, Reveal	
	12W	LED12DR30RVL/CDN	BR30, Reveal	
	12W	LED12DR30RVL/TP	BR30, Reveal 2850K, 630 Lumen	
	12W	LED12RS4RVLE26PB (95390)	Downlight, 2700K, 630 Lumen, E26	
	12W	LED12RS4RVLGUPB (95391)	Downlight, 2700K, 630 Lumen, GU24	
	12W	LED12RS6RVL326PB (95392)	Downlight, 2700K, 630 Lumen, E26	
	12W	LED12RS6RVLGUPB (95393)	Downlight, 2700K, 630 Lumen, GU24	
	18W	LED18D38W827/15	PAR38, 2700K, E26, 15° Beam	
	18W	LED18D38W827/25	PAR38, 2700K, E26, 25° Beam	
	18W	LED18D38W827/40	PAR38, 2700K, E26, 40° Beam	
	18W	LED18D38W830/15	PAR38, 3000K, 1400 Lumen, E26, 15° Beam	
	18W	LED18D38W830/25	PAR38, 3000K, 1400 Lumen, E26, 25° Beam	
	18W	LED18D38W830/40	PAR38, 3000K, 1400 Lumen, E26, 40° Beam	
	18W	LED18D38W927/15	PAR38, 2700K, 1100 Lumen, E26, 15° Beam	
	18W	LED18D38W927/25	PAR38, 2700K, 1100 Lumen, E26, 25° Beam	
	18W	LED18D38W927/40	PAR38, 2700K, 1100 Lumen, E26, 40° Beam	
	18W	LED18D38W930/15	PAR38, 3000K, 1200 Lumen, E26, 15° Beam	
	18W	LED18D38W930/25	PAR38, 3000K, 1200 Lumen, E26, 25° Beam	
	18W	LED18D38W930/40	PAR38, 3000K, 1200 Lumen, E26, 40° Beam	
	Halco	18W	PAR38/18NW/FL/LED†	PAR38, 5000K
		18W	PAR38/18WW/FL/LED†	PAR38, 2700K
20W		PAR38FL20/827/LED	PAR38, 2700K, 1150 Lumen Flood	
20W		PAR38FL20/830/LED	PAR38, 3000K, 1200 Lumen Flood	
20W		PAR38FL20/840/LED	PAR38, 4000K, 1250 Lumen Flood	
20W		PAR38FL20/850/LED	PAR38, 5000K, 1300 Lumen Flood	
20W		PAR38NFL20/827/LED	PAR38, 2700K, 1150 Lumen Flood	
20W		PAR38NFL20/830/LED	PAR38, 3000K, 1200 Lumen Flood	
20W		PAR38NFL20/840/LED	PAR38, 4000K Flood	
20W		PAR38NFL20/850/LED	PAR38, 5000K, 1300 Lumen Flood	
20W		PAR38SP20/827/LED	PAR38, 2700K, 1150 Lumen Spot	
20W		PAR38SP20/830/LED	PAR38, 3000K, 1200 Lumen Spot	
20W		PAR38SP20/840/LED	PAR38, 4000K Spot	
20W		PAR38SP20/850/LED	PAR38, 5000K, 1300 Lumen Spot	
Lighting Science	8W	DFN 19 CW 120	A19, Cool White, 5000K	
	8W	DFN 19 NW 120	A19, Neutral White, 4000K	
	8W	DFN 19 W27 120	A19, Warm White, 2700K	
	8W	DFN 19 WW 120	A19, Warm White, 3000K	
	8W	DFN 20 CW FL 120	PAR20, Cool White, 5000K	
	8W	DFN 20 CW NFL 120	PAR20, Cool White, 5000K	
	8W	DFN 20 NW FL 120	PAR20, Neutral White, 4000K	
	8W	DFN 20 NW NFL 120	PAR20, Neutral White, 4000K	
	8W	DFN 20 W27 FL 120	PAR20, Warm White, 2700K	
	8W	DFN 20 W27 NFL 120	PAR20, Warm White, 2700K	
	8W	DFN 20 WW FL 120	PAR20, Warm White, 3000K	
	8W	DFN 20 WW NFL 120	PAR20, Warm White, 3000K	
	8W	DFN 25 CW 120	G25, Cool White, 5000K	

† Requires a minimum of 2 lamps

†† Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266J

Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated August 4, 2015
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for wall-mounted C•L dimmers

Diva[®] C•L: DVWCL-153P, DVCL-153P, DVSCCL-153P
Skylark Contour[®] C•L: CTCL-153P
Skylark[®] C•L: LGCL-153PH
Lumea[®] C•L: LGCL-153PH
Toggler[®]/Ariadni[®] C•L: TGCL-153P, AYCL-153P



Maximum wattage controlled: 150W

Brand	Wattage	Model	Description	
Lighting Science	8W	DFN 25 NW 120	G25, Neutral White, 4000K	
	8W	DFN 25 W27 120	G25, Warm White, 2700K	
	8W	DFN 25 WW 120	G25, Warm White, 3000K	
	8W	DFN A19 V1 CW 120	A19, Cool White, 5000K	
	8W	DFN A19 V1 NW 120	A19, Neutral White, 4000K	
	8W	DFN A19 V1 W27 120	A19, Warm White, 2700K	
	8W	DFN A19 V1 WW 120	A19, Warm White, 3000K	
	10.5W	LS 30 75WE xxx GB xx 120	PAR30, various color temperatures	
	13W	LS GLP6 W27 120 WH S1 BX	6" Downlight, 2700K, E26 retrofit	
	13.5W	DFN A19 V2 CW 120	A19, Cool White, 5000K	
	13.5W	DFN A19 V2 NW 120	A19, Neutral White, 4000K	
	13.5W	DFN A19 V2 W27 120	A19, Warm White, 2700K	
	13.5W	DFN A19 V2 WW 120	A19, Warm White, 3000K	
	14.5W	GLP6 NW WH	6" Downlight, White, 4000K	
	14.5W	GLP6 W27 WH	6" Downlight, White, 2700K	
	14.5W	GLP6 WW WH	6" Downlight, Warm White, 3000K	
	15W	DFN BR30 CW FL 120	BR30, Cool White, 5000K	
	15W	DFN BR30 NW FL 120	BR30, Neutral White, 4000K	
	15W	DFN BR30 W27 FL 120	BR30, Warm White, 2700K	
	15W	DFN BR30 WW FL 120	BR30, Warm White, 3000K	
	16W	DFN BR40 CW 120	BR40, Cool White, 5000K	
	16W	DFN BR40 NW 120	BR40, Neutral White, 4000K	
	16W	DFN BR40 W27 120	BR40, Warm White, 2700K	
	16W	DFN BR40 WW 120	BR40, Warm White, 3000K	
	17W	DFN 30 CW V2 FL 120	PAR30, Cool White, 5000K	
	17W	DFN 30 CW V2 NFL 120	PAR30, Cool White, 5000K	
	17W	DFN 30 NW V2 FL 120	PAR30, Neutral White, 4000K	
	17W	DFN 30 NW V2 NFL 120	PAR30, Neutral White, 4000K	
	17W	DFN 30 W27 V2 FL 120	PAR30, Warm White, 2700K	
	17W	DFN 30 W27 V2 NFL 120	PAR30, Warm White, 2700K	
	17W	DFN 30 WW V2 FL 120	PAR30, Warm White, 3000K	
	17W	DFN 30 WW V2 NFL 120	PAR30, Warm White, 3000K	
	18W	DFN 38 CW FL 120	PAR38, Cool White, 5000K	
	18W	DFN 38 CW NFL 120	PAR38, Cool White, 5000K	
	18W	DFN 38 NW FL 120	PAR38, Neutral White, 4000K	
	18W	DFN 38 NW NFL 120	PAR38, Neutral White, 4000K	
	18W	DFN 38 W27 FL 120	PAR38, Warm White, 2700K	
	18W	DFN 38 W27 NFL 120	PAR38, Warm White, 2700K	
	18W	DFN 38 WW FL 120	PAR38, Warm White, 3000K	
	18W	DFN 38 WW NFL 120	PAR38, Warm White, 3000K	
	24W	DFN 38 CW V2 FL 120	PAR38, Cool White, 5000K	
	24W	DFN 38 CW V2 NFL 120	PAR38, Cool White, 5000K	
	24W	DFN 38 NW V2 FL 120	PAR38, Neutral White, 4000K	
	24W	DFN 38 NW V2 NFL 120	PAR38, Neutral White, 4000K	
	24W	DFN 38 W27 V2 FL 120	PAR38, Warm White, 2700K	
	24W	DFN 38 W27 V2 NFL 120	PAR38, Warm White, 2700K	
	24W	DFN 38 WW V2 FL 120	PAR38, Warm White, 3000K	
	24W	DFN 38 WW V2 NFL 120	PAR38, Warm White, 3000K	
	Litetronics	14W	LP14550FL2D	BR30, 2700K, 925 Lumen
		14W	LP14550FL4D	BR30, 3000K, 925 Lumen
14W		LP14550FL6D	BR30, 4000K, 925 Lumen	
Lumapro	8W	8A19/LED/DIM/30	A19, Warm White, 3000K (6GEM2)	
	8W	8A19/LED/DIM/50	A19, Cool White, 5000K (6GEM3)	
	8W	8PAR20/LED/DIM30/NFL	PAR20, Warm White, 3000K (6GEM4)	

† Requires a minimum of 2 lamps
†† Requires a minimum of 3 lamps
© Lutron Electronics Co., Inc. | PN 368-3266J

Dimmable CFL & LED bulbs

Compatible with C•L® dimmers

List Updated August 4, 2015
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for wall-mounted C•L dimmers

Diva® C•L: DVWCL-153P, DVCL-153P, DVSCCL-153P
Skylark Contour® C•L: CTCL-153P
Skylark® C•L: LGCL-153PH
Lumea® C•L: LGCL-153PH
Toggler®/Ariadni® C•L: TGCL-153P, AYCL-153P



Maximum wattage controlled: 150W

Brand	Wattage	Model	Description
Lumapro	8W	8PAR20/LED/DIM50/NFL	PAR20, Cool White, 5000K (6GEM5)
Luminus	18W	TP120-RT5/6-DIM-E	Retrofit downlight, 3000K, 1100 Lumen
	4.5W	9290002439	Candle, Warm White, 2700K, 320 Lumen, E26 base, Post Light
	6W	9290002242	MR16, 3000K, 300 Lumen, GU10 base
	6.5W	9290011347 (455741)	A19, Warm Glow, 450 Lumen
	7W	9290002020	PAR20, 2700K, 280 Lumen, Medium Base
	7W	9290002706	A19 SlimStyle, Daylight, 5000K, 450 Lumen, E26
	7W	6E26R20	R20, 2700K
	7W	7E26PAR20D-1	PAR20, 2700K, 280 Lumen, Medium Base
	7W	7E26PAR20-E	PAR20, 2700K
	8W	9290002267	A19, 2700K, 470 Lumen
	8W	9290002295	A19, 5000K, 470 Lumen
	8W	9290002329	PAR20, 3000K, 470 Lumen, E26
	8W	9290002330	PAR20
	8W	9290002331	PAR20
	8W	9290002332	PAR20
	8W	9290002333	PAR20
	8W	9290002334	PAR20
	8W	9290002335	PAR20
	8W	9290002704	A19 SlimStyle, 2700K, 450 Lumen, E26, 40WE
	8W	8E26A60	A19, 2700K
	8.5W	9290002543	BR30, 5000K, 730 Lumen, 8.5W
	8.5W	9290011116	BR30, 5000K, 730 Lumen, E26
	9W	9290011346	A19, Daylight, 5000K, 800 Lumen, E26
	9.5W	9290011117	BR30, 2700K, 730 Lumen, WarmGlow to 2200K (Nov 2014 or later)
	9.5W	9290011345	A19, Soft White, 2200-2700K, 800 Lumen, E26
	9.5W	9290011118 (452359)	BR30 SlimStyle, 2700K, 650 Lumen, E26, 65WE
	9.5W	9290011118 (452383)	BR30 SlimStyle, 2700K, 650 Lumen, E26, 65WE
	9.5W	9290011118 (452417)	BR30 SlimStyle, 2700K, 650 Lumen, E26, 65WE
	9.5W	9290011119 (452441)	BR30 SlimStyle, 5000K, 650 Lumen, E26, 65WE
	9.5W	9290011119 (452466)	BR30 SlimStyle, 5000K, 650 Lumen, E26, 65WE
	9.5W	9290011119 (452482)	BR30 SlimStyle, 5000K, 650 Lumen, E26, 65WE
	10.5W	9290002544	BR30, 2700K, 730 Lumen
	10.5W	9290002707	A19 SlimStyle, Soft White, 2700K, 800 Lumen, 3pk
	11W	9290002268	A19, 2700K, 830 Lumen
	11W	9290002296	A19, 5000K, 830 Lumen
	11W	9290011113	PAR30L, 3000K, ? Lumen, E26
	12W	12E26PAR30L-E2	PAR30, 3000K
	12W	9290002580 (431392)	BR40, 2700K, 800 Lumen
	12.5W	9290001829	A19, 2700K, 908 Lumen
	12.5W	12E26A60	A19, 2700K
	13W	9290002197	BR30, 2700K, 721 Lumen
	13W	9290011120	A21 SlimStyle, 2700K, 1100 Lumen
	13W	13E26B30DAAABAA	BR30, 3000K
	13W	9290002523 13PAR38/F25 3000 DIM AF RO	PAR38, 3000K, 950 Lumen
	14.5W	9290002199	BR40, 2700K, 832 Lumen
	15W	9290002426	A21, 2700K, 1180 Lumen
	15W	9290002595	A21, Soft White, 2700K, 1180 Lumen, E26
	15W	9290011111	PAR38, 3000K, 1050 Lumen, E26, Flood
	15W	9290011112	PAR38, 5000K, 1050 Lumen, E26, Flood
	17W	9290002018	A21, 2700K
	17W	17E26A21D	A21, 2700K
	17W	17E26PAR38-E2	PAR38, 3000K

Philips

† Requires a minimum of 2 lamps
† † Requires a minimum of 3 lamps
© Lutron Electronics Co., Inc. | PN 368-3266J

Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated August 4, 2015
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for wall-mounted C•L dimmers

Diva[®] C•L: DVWCL-153P, DVCL-153P, DVSCCL-153P
Skylark Contour[®] C•L: CTCL-153P
Skylark[®] C•L: LGCL-153PH
Lumea[®] C•L: LGCL-153PH
Toggler[®]/Ariadni[®] C•L: TGCL-153P, AYCL-153P



Maximum wattage controlled: 150W

Brand	Wattage	Model	Description	
Philips	18W	18E26PAR38D-2	PAR38, 2700K	
	19W	9290002473	PAR38, 3000K, 1250 Lumen	
	19.5W	9290002251	PAR38, 3000K, 1210 Lumen	
	19.5W	9290002252	PAR38, 2700K, 1183 Lumen	
	19.5W	9290002253	PAR38, 3000K, 1212 Lumen	
	19.5W	9290002291	PAR38, 4000K, 1207 Lumen	
	19.5W	9290002312	PAR38, 2700K, 1100 Lumen	
	19.5W	9290002313	PAR38, 2700K, 1196 Lumen	
	19.5W	9290002314	PAR38, 3000K, 1200 Lumen	
	19.5W	9290002315	PAR38, 3000K, 1225 Lumen	
	19.5W	9290002316	PAR38, 4000K, 1200 Lumen	
	19.5W	9290002317	PAR38, 4000K, 1245 Lumen	
	19.5W	9290002321	PAR38, 2700K, 1172 Lumen	
	19.5W	9290002322	PAR38, 5000K, 1300 Lumen	
		22W	9290002290	A21, 2700K, 1780 Lumen, Medium base
Satco	5.8W	S8842 thru S8844	A19	
	7W	S8827 thru S8838	PAR30	
	10.5W	S9037	A19, 2700K, 810 Lumen, E26	
	10.5W	S9038	A19, 3500K, 830 Lumen, E26	
	10.5W	S9039	A19, 5000K, 870 Lumen, E26	
	11W	S9084	PAR30, 3000K, 780 Lumen, E26, short neck, 25° Beam	
	11W	S9085	PAR30, 4000K, 780 Lumen, E26, short neck, 25° Beam	
	11W	S9086	PAR30, 3000K, 780 Lumen, E26, short neck, 40° Beam	
	11W	S9087	PAR30, 4000K, 780 Lumen, E26, short neck, 40° Beam	
	11W	S9088	PAR30, 3000K, 780 Lumen, E26, long neck, 25° Beam	
	11W	S9089	PAR30, 4000K, 780 Lumen, E26, long neck, 25° Beam	
	11W	S9090	PAR30, 3000K, 780 Lumen, E26, long neck, 40° Beam	
	11W	S9091	PAR30, 4000K, 780 Lumen, E26, long neck, 40° Beam	
		13W	S8959 thru S8963	PAR30
		14W	S8814 thru S8819	PAR30
		14W	S8821 thru S8826	PAR30
		17W	S8852 thru S8859	PAR38
		17W	S8861 thru S8864	PAR38
		17W	S8977-S8979	PAR38
		17W	S8984-S8986	PAR38
	17W	S9092	PAR38, 3000K, 1200 Lumen, E26, 25° beam	
	17W	S9093	PAR38, 4000K, 1200 Lumen, E26, 25° beam	
	17W	S9094	PAR38, 3000K, 1200 Lumen, E26, 40° beam	
	17W	S9095	PAR38, 4000K, 1200 Lumen, E26, 40° beam	
Solais	7W	LRP20/25/27K	PAR20, 2700K, 475 Lumen, E26, 25° Beam	
	7W	LRP20/25/30K	PAR20, 3000K, 500 Lumen, E26, 25° Beam	
	7W	LRP20/40/27K	PAR20, 2700K, 475 Lumen, E26, 40° Beam	
	7W	LRP20/40/30K	PAR20, 3000K, 500 Lumen, E26, 40° Beam	
	11W	LR20/25/27K/675/xx	PAR20, 2700K, 675 Lumen, E26, narrow flood	
	11W	LR20/25/30K/750	PAR20, 3000K, 750 Lumen, E26, narrow flood	
	11W	LR20/40/27K/675/xx	PAR20, 2700K, 675 Lumen, E26, wide flood	
	11W	LR20/40/30K/750/xx	PAR20, 3000K, 750 Lumen, E26, wide flood	
	16W	LR30/10/27K/1100/xx	PAR30, 2700K, 1100 Lumen, E26, short neck, 10° Beam	
	16W	LR30/10/30K/1125/xx	PAR30, 3000K, 1125 Lumen, E26, short neck, 10° Beam	
	16W	LR30/10/30K/1200/xx	PAR30, 3000K, 1200 Lumen, E26, short neck, 10° Beam	
	16W	LR30/15/27K/1100/xx	PAR30, 2700K, 1100 Lumen, E26, short neck, 15° Beam	
	16W	LR30/15/30K/1125/xx	PAR30, 3000K, 1125 Lumen, E26, short neck, 15° Beam	
	16W	LR30/15/30K/1200/xx	PAR30, 3000K, 1200 Lumen, E26, short neck, 15° Beam	
		16W	LR30/25/27K/1100/xx	PAR30, 2700K, 1100 Lumen, E26, short neck, 25° Beam

† Requires a minimum of 2 lamps
†† Requires a minimum of 3 lamps
© Lutron Electronics Co., Inc. | PN 368-3266J

Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated August 4, 2015
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for wall-mounted C•L dimmers

Diva[®] C•L: DVWCL-153P, DVCL-153P, DVSCCL-153P
Skylark Contour[®] C•L: CTCL-153P
Skylark[®] C•L: LGCL-153PH
Lumea[®] C•L: LGCL-153PH
Toggler[®]/Ariadni[®] C•L: TGCL-153P, AYCL-153P



Maximum wattage controlled: 150W

Brand	Wattage	Model	Description
Solais	16W	LR30/25/30K/1125/xx	PAR30, 3000K, 1125 Lumen, E26, short neck, 25° Beam
	16W	LR30/25/30K/1200/WH	PAR30, 3000K, 1200 Lumen, E26, short neck, 25° Beam
	16W	LR30/40/27K/1100/xx	PAR30, 2700K, 1100 Lumen, E26, short neck, 40° Beam
	16W	LR30/40/30K/1125/xx	PAR30, 3000K, 1125 Lumen, E26, short neck, 40° Beam
	16W	LR30/40/30K/1200/xx	PAR30, 3000K, 1200 Lumen, E26, short neck, 40° Beam
	16W	LRP38/25/27K	PAR38, 2700K, 1025 Lumen, E26, 25° Beam
	16W	LRP38/25/30K	PAR38, 3000K, 1100 Lumen, E26, 25° Beam
	16W	LRP38/40/27K	PAR38, 2700K, 1025 Lumen, E26, 40° Beam
	16W	LRP38/40/30K	PAR38, 3000K, 1100 Lumen, E26, 40° Beam
	20W	LR38/25/30K/1450/SL	PAR38, 3000K, 1450 Lumen, E26, 15° Beam
	28W	LR38/15/27K/2000/xx	PAR38, 2700K, 2000 Lumen, E26
	28W	LR38/15/30K/2100/xx	PAR38, 3000K, 2100 Lumen, E26
	28W	LR38/25/27K/2000/xx	PAR38, 2700K, 2000 Lumen, E26
	28W	LR38/25/30K/2100/xx	PAR38, 3000K, 2100 Lumen, E26
	28W	LR38/40/27K/2000/xx	PAR38, 2700K, 2000 Lumen, E26
	28W	LR38/40/30K/2100/xx	PAR38, 3000K, 2100 Lumen, E26
Switch	10W	A260FUS27B1	A19, 800 Lumen
Sylvania	6W	79643	A19, Soft White, 2700K, 450 Lumen, E26, clear
	7W	79120	PAR20, 2700K, 500 Lumen, E26
	7W	LED7A19/DIM/0/SE/830 (78214)	A19, 3000K to 2000K, 450 Lumen, E26, Sunset Effect
	7W	LED7A19/DIM/0/SE/830/RP (78213)	A19, 3000K to 2000K, 450 Lumen, E26, Sunset Effect
	7W	LED7PAR20/DIM/830/FL30 (78785)	PAR20, 3000K, 450 Lumen, E26, 30° Beam
	7W	LED7PAR20/DIM/830/FL30/RP (79094)	PAR20, 3000K, 450 Lumen, E26, 30° Beam
	8W	LED8A/DIM/F/827	A19, 2700K
	8W	LED8A/DIM/F/830	A19, 3000K
	8W	LED8A19DIMO827RP	A19, 2700K, 470 Lumen, E26
	8W	LED8G25/DIM/F/827	G25, 2700K
	8W	LED8G25/DIM/F/830	G25, 3000K
	8W	LED8PAR16/DIM/930/FL36/P/LW	PAR16, Soft White, 390 Lumen
	8W	LED8PAR16/GU10/DIM/930/FL36/RP	PAR16, GU10, Soft White, 390 Lumen
	8W	LED8R20/DIM/SE/830/RP	R20, Soft White, 2700K to 2000K, 520 Lumen
	10W	LED/600/RT4/830/FL80/RP	Recessed lighting kit, 3000K, 600 Lumen
	10W	LED/RT4/600/827/FL80	Recessed lighting kit, 2700K, 600 Lumen
	10W	LED/RT6/700/830/SE/1PK (73195-0)	6" Downlight, 3000K, 700 Lumen, E26, Retro-fit
	10W	LED10A19/DIM/0/SE/830	A19, 3000K, 800 Lumen
	10W	LED10A19/DIM/0/SE/830/RP (78215)	A19, 3000K, 800 Lumen
	10W	LED10PAR20/DIM//P/930/FL30	PAR20, 3000K, 550 Lumen
	10W	LED10PAR30/DIM/SG/827/NFL25	PAR 30, 2700K
	10W	LED10PAR30/DIM/SG/827/SP10	PAR 30, 2700K
	10W	LED10PAR30/DIM/SG/827/WSP15	PAR 30, 2700K
	10W	LED10PAR30/DIM/SG/830/NFL25	PAR 30, 3000K
	10W	LED10PAR30/DIM/SG/830/SP10	PAR 30, 3000K
	10W	LED10PAR30/DIM/SG/830/WSP15	PAR 30, 3000K
	10.5W	LED10A19/DIM/CL/O/827 (79146)	A19, 2700K, 800 Lumen, E26, 60WE
10.5W	LED10A19/DIM/CL/O/827/BL (79147)	A19, 2700K, 800 Lumen, E26, 60WE	
10.5W	LED10A19/DIM/CL/O/827/G4 (79142)	A19, 2700K, 800 Lumen, E26, 60WE	

† Requires a minimum of 2 lamps
†† Requires a minimum of 3 lamps
© Lutron Electronics Co., Inc. | PN 368-3266J

Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated August 4, 2015
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for wall-mounted C•L dimmers

Diva[®] C•L: DVWCL-153P, DVCL-153P, DVSCCL-153P
Skylark Contour[®] C•L: CTCL-153P
Skylark[®] C•L: LGCL-153PH
Lumea[®] C•L: LGCL-153PH
Toggler[®]/Ariadni[®] C•L: TGCL-153P, AYCL-153P



Maximum wattage controlled: 150W

Brand	Wattage	Model	Description
Sylvania	10.5W	LED10A19/DIM/CL/O/827/G4/BL (79143)	A19, 2700K, 800 Lumen, E26, 60WE
	10.5W	LED10A19/DIM/CL/O/827/RP (79644)	A19, 2700K, 800 Lumen, E26, 60WE
	10.5W	LED10A19/DIM/CL/O/850/G4 (79144)	A19, 5000K, 800 Lumen, E26, 60WE
	10.5W	LED10A19/DIM/CL/O/850/G4/BL (79145)	A19, 5000K, 800 Lumen, E26, 60WE
	11W	LED11BR30/DIM/HO/827/G3 (78413)	BR30, 2700K, 800 Lumen, E26
	11W	LED11BR30/DIM/HO/827/G3/RP (78415)	BR30, 2700K, 800 Lumen, E26
	11W	LED11BR30/DIM/HO/827/G3/RP (79121)	BR30, 2700K, 800 Lumen, E26
	12W	LED12BR30/DIM/HO/827	BR30, 2700K, Medium base
	12W	LED12BR30/DIM/HO/827/HVP	BR30, 2700K, Medium base
	12W	LED12BR30/DIM/SE/830/RP	BR30, Soft White, 2700K to 2000K, 850 Lumen
	14W	LED14PAR38/DIM/830/FL40/W	PAR38, 3000K, 1050 Lumen, E26, Flood, 90WE
	14W	LED14PAR38/DIM/850/FL40WRP	PAR38, 5000K, 1050 Lumen, E26, Flood, 90WE
	15W	LED15BR40/DIM/HO/827/G3/RP	BR40, Soft White, 2700K, 1100 Lumen, E26, Flood
	15W	LED15PAR30LN/DIM/827/FL40	PAR30, 2700K
	15W	LED15PAR30LN/DIM/830/NFL25	PAR30, 3000K
	16W	LED16BR40DIMHO827	BR40, 2700K, 1100Lumen
	17W	LED17PAR30LN/DIM/830/WSP15/P	PAR30, 3000K, 1200 Lumen, E26, spot
	17W	LED17PAR30LN/DIM/830/WSP20	PAR30, 3000K, 1200 Lumen, E26, wide spot
	17W	LED17PAR30LN/DIM/P/930/NFL25	PAR30, 3000K, 900 Lumen
	20W	LED20PAR38/DIM/930/FL40/P2	PAR38, 3000K, 1000 Lumen,
	20W	LED20PAR38DIM830FL40	PAR38, 3000K, 1300 Lumen
21W	LED21/PAR38/DIM/P/930/FL30/HVP	PAR38, Warm White, 3000K, 1100 Lumen, E26, 21W	
TCP	11W	LED11E26BR3027K	BR30, 2700K
	14W	LED14E26BR3027K	BR30, 2700K
	17W	LED17E26P3827KFL	PAR38, 2700K
	17W	LED17E26P3827KNFL	PAR38, 2700K
	17W	LED17E26P3830KFL	PAR38, 3000K
	17W	LED17E26P3830KFLBT	PAR38
	17W	LED17E26P3830KFLWT	PAR38
	17W	LED17E26P3830KNFL	PAR38, 3000K
	17W	LED17E26P3830KNFLBT	PAR38
	17W	LED17E26P3830KNFLWT	PAR38
	17W	LED17E26P3841KFL	PAR38, 4100K
	17W	LED17E26P3841KNFL	PAR38, 4100K
	17W	LED17E26P3850KFL	PAR38, 5000K
	17W	LED17E26P3850KNFL	PAR38, 5000K
Toshiba	13W	LDRB1327WE6USD2 (13BR40/27K-T)	BR40, 2700K, 950 Lumen
	13W	LDRB1340WE6USD2 (13BR40/40L-T)	BR40, 4000K, 1050 Lumen
Utilitech	3W	LG161/2DM/IF/LED [†]	G16.5, Warm White, 3000K, 200 Lumen, E12 base, frosted
	4.5W	LR14DMLED	R14, Soft White, 2700K, 300 Lumen, E26, 40WE
	4.8W	LA15DM/CL/300/LED [†]	A15, Warm White, 3000K, 300 Lumen, E26, clear
	4.8W	LA15DM/IF/300/LED [†]	A15, Warm White, 3000K, 300 Lumen, E26, frosted

† Requires a minimum of 2 lamps
†† Requires a minimum of 3 lamps
© Lutron Electronics Co., Inc. | PN 368-3266J

Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated August 4, 2015
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for wall-mounted C•L dimmers

Diva[®] C•L: DVWCL-153P, DVCL-153P, DVSCCL-153P
Skylark Contour[®] C•L: CTCL-153P
Skylark[®] C•L: LGCL-153PH
Lumea[®] C•L: LGCL-153PH
Toggler[®]/Ariadni[®] C•L: TGCL-153P, AYCL-153P



Maximum wattage controlled: 150W

Brand	Wattage	Model	Description
Utilitech	4.8W	LA15DMC/CL/300/LED [†]	A15, Warm White, 3000K, 300 Lumen, E12 base, clear
	4.8W	LCFCDM/300/LED [†]	Candle, Warm White, 3000K, 300 Lumen, E12 base, clear flame tip
	4.8W	LCFFDM/300/LED [†]	Candle, Warm White, 3000K, 300 Lumen, E12 base, frosted flame tip
	4.8W	LEFCDM/300/LED [†]	Candle, Warm White, 3000K, 300 Lumen, E26 base, clear flame tip
	4.8W	LG161/2DM/CL/300/LED [†]	G16.5, Warm White, 3000K, 300 Lumen, E12 base, clear
	4.8W	LG161/2DM/IF/300/LED [†]	G16.5, Warm White, 3000K, 300 Lumen, E12 base, frosted
	4.8W	LGMDM/CL/300/LED [†]	G16.5, Warm White, 3000K, 300 Lumen, E26, clear
	6.5W	LMR16/GU10/DM/LED [†]	MR16, GU10 base
	6.5W	LMR16DMGU10 [†]	MR16, GU10 base
	6.5W	LR16DMLED	R16, Soft White, 2700K, 400 Lumen, E26, 40WE
	7.5W	LA19DM/GU24/LED	A19, 3000K, GU24
	7.5W	LA19DM/LED	A19, 3000K, 450 Lumen, E26
	7.5W	LPAR20DM/5K/LED	PAR20, 5000K
	7.5W	LPAR20DM/LED	PAR20, 3000K
	8W	LA19DM/5K/LED	A19, 5000K
	8W	LG25DM/LEDG2 [†]	G25, Warm White, 3000K, 510 Lumen, E26
	8W	LR20DM/LED	R20, 2700K, 450 Lumen (90mA ridged reflector version)
	8W	LR20DMLEDG2	R20, 2700K, 450 Lumen, E26 Medium base (70 mA smooth reflector version)
	9W	LR20HO/LED/G2	R20, Soft White, 650 Lumen, E26, flood
	9W	R20HO/LED/G2	R20, Soft White, 650 Lumen, E26, flood
	9.5W	LPAR20/5K/LEDG5	PAR20, 5000K, 500 Lumen
	9.5W	LPAR20/LEDG5	PAR20, 3000K, 450 Lumen
	9.5W	LPAR20DM/SP/LED	PAR20, 3000K, 465 Lumen, Spot
	9.8W	LA19DM/800/LED/G2	A19, 3000K, 800 Lumen
	10W	LA19DM/800/5K/LEDG2	A19, 5000K
	10W	LA19DM/800/LEDG2	A19, 3000K, 800 Lumen
	10W	LG25/DM/LED	G25, 3000K
	11W	DLS02-06A27D1E-WH-F2	5" or 6" Downlight, 2700K, 700 Lumen, E26 retrofit 2pk
	11W	DLS02-41127D1E-WF1	4" Downlight, Soft White, 2700K, 650 Lumen, E26 retrofit
	12W	LPAR30L/LEDG7/2	PAR30L, 3000K, 800 Lumen, E26, long neck, 2PK
	13W	DLS02-06A50D1E-WH-F1	5" or 6" Downlight, 5000K, 700 Lumen, E26 retrofit
	13W	DLS02-61327D1E-WF1	5" or 6" Downlight, Soft White, 2700K, 800 Lumen, E26 retrofit
	13W	DLS02-61350D1E-WF1	5" or 6" Downlight, Daylight, 5000K, 800 Lumen, E26 retrofit
	13W	LBR30DM/LEDG2	BR30
	13.5W	LA19/OM800/LED	A19, 3000K, 800 Lumen, Omni Directional
	13.5W	LA19DM/800/LED	A19, 3000K
	15W	LBR30HO/LED/G2	BR30, Soft White, 1150 Lumen
	15W	LPAR30L/5K/LEDG5	PAR30, 5000K, 800 Lumen, long neck flood
	15W	LPAR30L/LEDG5	PAR30, 3000K, 790 Lumen, long neck flood
	15W	LPAR30LDM/SP/LED	PAR30, 3000K, 790 Lumen, long neck, spot
	15W	LPAR30S/LEDG5	PAR30, 3000K, 750 Lumen, short neck flood
	16W	LA19/OM1100R/LED	A19, 3000K, 1100 Lumen, Omni Directional
16W	LBR40DMLEDG2	BR40, 2700K, 1065 Lumen	
16W	LPAR38LEDG72	PAR38, 3000K, 950 Lumen, 2PK	
17.5W	YGA08A35-17.5W-827	BR40, 2700K, 1100 Lumen	
18W	LPAR38DM/5K/LED	PAR38, 5000K	
18W	LPAR38DM/LED	PAR38, 3000K	
20W	L20PAR38/LEDG5	PAR38, 3000K, 1000 Lumen, flood	
20W	LBR40HO/LED/G2	BR40, Soft White, 1400 Lumen	
20W	LPAR38/5K/LEDG5	PAR38, 5000K, 1000 Lumen, flood	
20W	LPAR38/LEDG5	PAR38, 3000K, 1000 Lumen, flood	
20W	LPAR38DM/SP/LED	PAR38, 3000K, 1000 Lumen, Spot	

† Requires a minimum of 2 lamps

†† Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266J



Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated August 4, 2015
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for wall-mounted C•L dimmers

Diva[®] C•L: DVWCL-153P, DVCL-153P, DVSCCL-153P
Skylark Contour[®] C•L: CTCL-153P
Skylark[®] C•L: LGCL-153PH
Lumea[®] C•L: LGCL-153PH
Toggler[®]/Ariadni[®] C•L: TGCL-153P, AYCL-153P



Maximum wattage controlled: 150W

Brand	Wattage	Model	Description
Utilitech	20.5W	LPAR381400LEDG72	PAR38, 1450 Lumen, 2PK
	22W	LA/OM1600R/5K/LED	A21, Daylight, 5000K, 1600 Lumen
	22W	LA/OM1600R/LED	A21, Warm White, 3000K, 1600 Lumen
	23W	LPAR38/1400/5K/LEDG5	PAR38, 5000K, 1400 Lumen
	23W	LPAR38/1400/LEDG5	PAR38, 3000K, 1400 Lumen
Westinghouse	8W	8A19/LED/DIM/30	A19, Warm White, 3000K
	8W	8A19/LED/DIM/50	A19, Cool White, 5000K
	8W	8PAR20/LED/DIM30/NFL	PAR20, Warm White, 3000K
	8W	8PAR20/LED/DIM50/NFL	PAR20, Warm White, 5000K

† Requires a minimum of 2 lamps
†† Requires a minimum of 3 lamps
© Lutron Electronics Co., Inc. | PN 368-3266J

Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated August 4, 2015
For the most up-to-date list, visit
www.lutron.com/dimcflled



CFL bulbs for wall-mounted C•L dimmers

Diva[®] C•L: DVWCL-153P, DVCL-153P, DVSCCL-153P
Skylark Contour[®] C•L: CTCL-153P
Skylark[®] C•L: LGCL-153PH
Lumea[®] C•L: LGCL-153PH
Toggler[®]/Ariadni[®] C•L: TGCL-153P, AYCL-153P



Maximum wattage controlled: 150W

Brand	Wattage	Model	Description
Earthmate	5W	E05129LW	Candle
	5W	8TC05	Candle, (ES5CCDF052, ES9CCDF052)
EcoSmart	5W	8TC05F	Candle, Torpedo Tip, 2700K, 200 Lumen
	5W	8TFC05F	Candle, Flame Tip, 2700K, 200 Lumen
	11W	BPESL11R20/DM/ESM	R20, Soft White
	14W	40114	Spiral, Soft White (ES5M814DIM2, ES9M814DIM2)
	14W	2R2014DIM	R20, 2700K, 410 Lumen
	15W	2R3015DIM	R30 Flood, Soft White (ES5R315DIM2)
	15W	2R3015DIM35K	R30 Flood, Bright White (ES5R315DIM35K)
	15W	2R3015DIM50K	R30 Flood, Daylight (ES5R315DIM250K)
	23W	40123	Spiral, Soft White (ES5M823DIM2)
Feit	11W	BPESL11R20/DM	R20
	13W	LBP13T2C/DM	Spiral, Candelabra base
	15W	BPESL15T/DM	Spiral
	23W	BPESL23R40/DIM†	R40
	23W	BPESL23T/DM	Spiral
GE	14W	FLE14HT3/2/DM/SW†	Spiral
	26W	FLE26/2/DVR/40	R40
	26W	FLE26HT3/2/DV/SW	Spiral
Philips	16W	EL/A R30 Dim 16W†	R30
	20W	EL/A R40 Dim 20W	R40
Sylvania	5W	CF5EL/B10/827/L/DIM	Candle
	5W	CF5EL/B10C/DIM/827/ADP	Candle
	5W	CF5EL/DEC/DIM	Candle
	14W	CF14EL/R20/DIM†	R20
	14W	CF14EL/TWIST/DIM†	Spiral
TCP	24W	CF24EL/TWIST/DIM†	Spiral
	3W	8T03CL	Candle Clear
	5W	8TC05F	Candle
	5W	8TFC05F	Candle, flame tip
	8W	8A08WH	A-bulb
	14W	40114	Spiral
	14W	2R2014DIM	R20, 2700K, 410 Lumen
	14W	4R2014TD	R20, TruDim, 2700K
	14W	4R2014TD30K	R20, TruDim, 3000K
	14W	4R2014TD35K	R20, TruDim, 3500K
	14W	4R2014TD41K	R20, TruDim, 4100K
	14W	4R2014TD50K	R20, TruDim, 5000K
	14W	4R2014TD65K	R20, TruDim, 6500K
	15W	2R3015DIM	R30, Soft White, 2700K
	16W	4R3016TD	R30, TruDim, 2700K
	16W	4R3016TD30K	R30, TruDim, 3000K
	16W	4R3016TD35K	R30, TruDim, 3500K
	16W	4R3016TD41K	R30, TruDim, 4100K
	16W	4R3016TD50K	R30, TruDim, 5000K
	16W	4R3016TD65K	R30, TruDim, 6500K
Utilitech	23W	10123	Spiral
	23W	40123	Spiral
	11W	LBP11R20DM	R20, Soft White, 2700K
	15W	LBP15TDM	Spiral
	23W	LBP23R40DM	R40
	23W	LBP23TDM	Spiral

† Requires a minimum of 2 lamps
†† Requires a minimum of 3 lamps
© Lutron Electronics Co., Inc. | PN 368-3266J

Dimmable CFL & LED bulbs

Compatible with C•L® dimmers

List Updated August 4, 2015
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for C•L lamp dimmers

Credezza® C•L: TTCL-100H

Maximum wattage controlled: 100W



Brand	Wattage	Model	Description
Cree	6W	BA19-04527OMF-12DE26-1U100	A19, Warm Soft White, 2700K, 450 Lumen, Medium base
	6W	BA19-04527OMF-12DE26-2U100	A19, Warm Soft White, 2700K, 450 Lumen, Medium base
	6W	BA19-04550OMF-12DE26-2U500	A19, 5000K, 450 Lumen, 40WE, 4pk
	18W	BA21-16027OMF-12DE26-1U100	A21, 2700K, 1600 Lumen, E26, 18W
	18W	BA21-16050OMF-12DE26-1U100	A21, 5000K, 1600 Lumen, E26, 18W
EcoSmart	8W	ECS 19 WW 120	A19, Warm White, 3000K
	8W	ECS A19 V1 CW 120	A19, Daylight, 5000K
	8W	ECS A19 V1 WW 120	A19, Warm White, 3000K
	13W	ECS A19 V2 CW 120	A19, Daylight, 5000K
	13W	ECS A19 V2 WW 120	A19, Warm White, 3000K
Feit	6.5W	R16DM/LED	R16, Soft White, 2700K, 400 Lumen, E26, 40WE
	10W	BPAG800/5K/LED	A19, 5000K
	10W	BPAG800/LED	A19, 3000K, 800 Lumen
	22W	A/OM1600R/27K/LED	A21, 2700K, 1600 Lumen
	22W	A/OM1600R/5K/LED	A21, Daylight, 5000K, 1600 Lumen
GE	22W	A/OM1600R/LED	A21, Warm White, 3000K, 1600 Lumen
	14W	LED14DA21V2/827W	A21, 2700K, 1100 Lumen, E26
	8W	DFN 19 CW 120	A19, Cool White, 5000K
	8W	DFN 19 NW 120	A19, Neutral White, 4000K
	8W	DFN 19 W27 120	A19, Warm White, 2700K
Lighting Science	8W	DFN 19 WW 120	A19, Warm White, 3000K
	8W	DFN A19 V1 CW 120	A19, Cool White, 5000K
	8W	DFN A19 V1 NW 120	A19, Neutral White, 4000K
	8W	DFN A19 V1 W27 120	A19, Warm White, 2700K
	8W	DFN A19 V1 WW 120	A19, Warm White, 3000K
	13.5W	DFN A19 V2 CW 120	A19, Cool White, 5000K
	13.5W	DFN A19 V2 NW 120	A19, Neutral White, 4000K
	13.5W	DFN A19 V2 W27 120	A19, Warm White, 2700K
	13.5W	DFN A19 V2 WW 120	A19, Warm White, 3000K
	Lumapro	8W	8A19/LED/DIM/30
8W		8A19/LED/DIM/50	A19, Cool White, 5000K (6GEM3)
7W		7E26A60	A19 EnduraLED 2700K
Philips	8W	9290002704	A19 SlimStyle, 2700K, 450 Lumen, E26, 40WE
	8W	8E26A60	A19, 2700K
	12.5W	12E26A60	A19, 2700K
	15W	9290002426	A21, 2700K, 1180 Lumen
	15W	9290002595	A21, Soft White, 2700K, 1180 Lumen, E26
Switch	10W	A260FUS27B1	A19, 800 Lumen
	13W	75FU202	A19, 3000K, 1100 Lumen, E26
Sylvania	8W	LED8A/DIM/F/827	A19, 2700K
	8W	LED8A/DIM/F/830	A19, 3000K
	8W	LED8A19DIM0827RP	A19, 2700K, 470 Lumen, E26
	10.5W	LED10A19/DIM/CL/O/827 (79146)	A19, 2700K, 800 Lumen, E26, 60WE
	10.5W	LED10A19/DIM/CL/O/827/BL (79147)	A19, 2700K, 800 Lumen, E26, 60WE
	10.5W	LED10A19/DIM/CL/O/827/G4 (79142)	A19, 2700K, 800 Lumen, E26, 60WE
	10.5W	LED10A19/DIM/CL/O/827/G4/BL (79143)	A19, 2700K, 800 Lumen, E26, 60WE
	10.5W	LED10A19/DIM/CL/O/827/RP (79644)	A19, 2700K, 800 Lumen, E26, 60WE
	10.5W	LED10A19/DIM/CL/O/850/G4 (79144)	A19, 5000K, 800 Lumen, E26, 60WE
	10.5W	LED10A19/DIM/CL/O/850/G4/BL (79145)	A19, 5000K, 800 Lumen, E26, 60WE
Utilitech	6.5W	LR16DMLED	R16, Soft White, 2700K, 400 Lumen, E26, 40WE
	9.8W	LA19DM/800/LED/G2	A19, 3000K, 800 Lumen
	10W	LA19DM/800/5K/LEDG2	A19, 5000K

† Requires a minimum of 2 lamps

†† Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266J

Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated August 4, 2015
 For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for C•L lamp dimmers

Credenza[®] C•L: TTCL-100H

Maximum wattage controlled: 100W



Brand	Wattage	Model	Description
Utilitech	10W	LA19DM/800/LEDG2	A19, 3000K, 800 Lumen
	22W	LA/OM1600R/5K/LED	A21, Daylight, 5000K, 1600 Lumen
	22W	LA/OM1600R/LED	A21, Warm White, 3000K, 1600 Lumen
Westinghouse	8W	8A19/LED/DIM/30	A19, Warm White, 3000K
	8W	8A19/LED/DIM/50	A19, Cool White, 5000K

† Requires a minimum of 2 lamps
 †† Requires a minimum of 3 lamps
 © Lutron Electronics Co., Inc. | PN 368-3266J

Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated August 4, 2015
For the most up-to-date list, visit
www.lutron.com/dimcflled



CFL bulbs for C•L lamp dimmers

Credenza[®] C•L: TTCL-100H

Maximum wattage controlled: 100W



Brand	Wattage	Model	Description
EcoSmart	14W	40114	Spiral, Soft White (ES5M814DIM2, ES9M814DIM2)
	23W	10123	Spiral
	23W	40123	Spiral, Soft White (ES5M823DIM2)
Feit	15W	BPESL15T/DM	Spiral
	23W	BPESL23T/DM	Spiral
Litetronics	5W	MB-500D	A19
	5W	MB-500DL	A19
	8W	MB-800D	A19
	8W	MB-800DL	A19
	11W	MB-15527D	Post Light
Philips	27W	L-27527D	Spiral
	15W	EL/mdt DIM 15W	Spiral
	20W	EL/mdt DIM 20W	Spiral
Sylvania	32W	EL/dt Dim 32W	Spiral
	14W	CF14EL/TWIST/DIM	Spiral
TCP	24W	CF24EL/TWIST/DIM	Spiral
	14W	40114	Spiral
	23W	10123	Spiral
Utilitech	23W	40123	Spiral
	15W	LBP15TDM	Spiral
	23W	LBP23TDM	Spiral

† Requires a minimum of 2 lamps

†† Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266J

Dimmable CFL & LED bulbs

Compatible with C•L® dimmers

List Updated August 4, 2015
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Maestro Wireless® C•L dimmers

Maestro Wireless: MRF2-6CL

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description	
Commercial Electric	12W	CER6730Axx	Downlight, 670 Lumen, E26 retro fit kit	
	6W	BA19-04527OMF-12DE26-3U100	A19 4Flow, 2700K, 460 Lumen, E26	
	6W	BA19-04550OMF-12DE26-3U100	A19 4Flow, 5000K, 460 Lumen, E26	
	9.5W	BA19-08027OMF-12DE26-2U100	A19, Soft White, 2700K, 800 Lumen, Medium base	
	9.5W	BA19-08027OMF-12DE26-2U500	A19, 2700K, 800 Lumen, E26, 60WE, 4pk	
Cree	9.5W	BBR30-06527FLF-12DE26-1U100	BR30, 650 Lumen, Soft White, 2700K	
	9.5W	BBR30-06550FLF-12DE26-1U100	BR30, Daylight, 5000K 650 Lumen, 9.5W	
	12.5W	DRDL6-06227009-12DE26-1C100	6" Downlight, 2700K TW, 625 Lumen, E26 retrofit	
	12.5W	DRDL6-06250009-12DE26-1C100	6" Downlight, 5000K TW, 625 Lumen, E26 retrofit	
	18W	BA21-16027OMF-12DE26-1U100	A21, 2700K, 1600 Lumen, E26, 18W	
	18W	BA21-16050OMF-12DE26-1U100	A21, 5000K, 1600 Lumen, E26, 18W	
	18W	BPAR38-1503027T-12DE26-1U100	PAR38, 3000K, 1500 Lumen, 27 deg spot	
	18W	BPAR38-1503047T-12DE26-1U100	PAR38, 3000K, 1500 Lumen, 47 deg flood	
	EcoSmart	7W	ECS BR20 50WE CW 120 G1 BL	BR20, Daylight, 5000K, 525 Lumen, E26
		7.5W	BPA15/CL/500/LED/ESM	A15, Soft White, 2700K, 500 Lumen, E26
7.5W		BPA15C/CL500/LED/ESM	A15, Soft White, 2700K, 500 Lumen, E12	
7.5W		BPCFC/500/LED/ESM	B10, Soft White, 2700K, 500 Lumen, E12	
7.5W		BPEFC/500/LED/ESM	B10, Soft White, 2700K, 500 Lumen, E26	
7.5W		BPGM/CL/500/LED/ESM	G16.5, Soft White, 2700K, 500 Lumen, E26	
9.5W		ECS DN4 CW E26 120	4" Downlight, Daylight, 5000K, 650 Lumen, E26, retrofit	
9.5W		ECS DN4 CW GU24 120	4" Downlight, Daylight, 5000K, 650 Lumen, GU24 base, retrofit	
9.5W		ECS DN4 W27 E26 120	4" Downlight, Soft White, 2700K, 650 Lumen, E26 retrofit	
9.5W		ECS DN4 W27 GU24 120	4" Downlight, Soft White, 2700K, 650 Lumen, GU24 base, retrofit	
9.5W		ECS DN6 CW GU24 120	6" Downlight, Daylight, 5000K, 650 Lumen, GU24 base, retrofit	
9.5W		ECS DN6 W27 E26 120	6" Downlight, Soft White, 2700K, 650 Lumen, E26 retrofit	
9.5W		ECS DN6 W27 E26 120 2BX	6" Downlight, Soft White, 2700K, E26 retrofit, 2pk	
9.5W		ECS DN6 W27 E26 120 BX V3	6" Downlight, Soft White, 2700K, 650 Lumen, E26 retrofit	
9.5W		ECS DN6 W27 GU24 120	6" Downlight, Soft White, 2700K, 650 Lumen, GU24 base, retrofit	
15W		ECS BR30 75WE CW 120 G1 BL	BR30, Daylight, 5000K, 985 Lumen, E26	
15W		ECS BR30 75WE W27 120 G1 3PK	BR30, Soft White, 2700K, 940 Lumen, E26, 3pk	
15W		ECS BR30 75WE W27 120 G1 BL	BR30, Soft White, 2700K, 940 Lumen, E26	
Feit		4.5W	R14DM/LED	R14, Soft White, 2700K, 300 Lumen, E26, 40WE
		6.5W	BPMR16/GU10/DM/LED†	MR16, GU10 base
	6.5W	MR16/GU10/DM/LED†	MR16, GU10 base	
	6.5W	R16DM/LED	R16, Soft White, 2700K, 400 Lumen, E26, 40WE	
	13W	BPCEBR30LED	BR30	
	13.5W	A19/OM800/5K/LED†	A19, 5000K, Omni Directional	
	13.5W	A19/OM800/LED†	A19, 3000K, Omni Directional	
	13.5W	BPCEA19/OM800/LED†	A19, Omni Directional	
	13.5W	BPCEA19/OM800/LED/CAN†	A19, Omni Directional	
	14W	LEDR56/830	Downlight, 3000K, 925 Lumen, retrofit kit	
	16.8W	LEDR56/3K†	5" or 6" Downlight, 3000K, 840 Lumen	
	17W	BPCEBR40/LED	BR40, 2700K, 1065 Lumen	
	17W	BR40/DM/LED†	BR40, 2700K, 1065 Lumen	
	20W	20PAR38/LEDG5	PAR38	
	20W	BPCEPAR38/LEDG5	PAR38	
	20W	PAR38/5K/LEDG5	PAR38, 5000K	
	20W	PAR38/5K/LEDG5/CAN	PAR38, 5000K	
	20W	PAR38/LEDG5	PAR38	
	20W	PAR38/LEDG5/CAN	PAR38	
	20.5W	LEDR56/827	5" or 6" Downlight, 2700K, 1245 Lumen	
GE	11W	LED11DA19RVL/TP	A19, 2700K, 570 Lumen	
	11W	LED11DA19V2	A19, 2700K, 800 Lumen	
Halco	20W	PAR38FL20/827/LED	PAR38, 2700K, 1150 Lumen Flood	
	20W	PAR38FL20/830/LED	PAR38, 3000K, 1200 Lumen Flood	
	20W	PAR38FL20/840/LED	PAR38, 4000K, 1250 Lumen Flood	

† Requires a minimum of 2 lamps

†† Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266J

Dimmable CFL & LED bulbs

Compatible with C•L® dimmers

List Updated August 4, 2015
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Maestro Wireless® C•L dimmers

Maestro Wireless: MRF2-6CL

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description
Halco	20W	PAR38FL20/850/LED	PAR38, 5000K, 1300 Lumen Flood
	20W	PAR38NFL20/827/LED	PAR38, 2700K, 1150 Lumen Flood
	20W	PAR38NFL20/830/LED	PAR38, 3000K, 1200 Lumen Flood
	20W	PAR38NFL20/840/LED	PAR38, 4000K Flood
	20W	PAR38NFL20/850/LED	PAR38, 5000K, 1300 Lumen Flood
	20W	PAR38SP20/827/LED	PAR38, 2700K, 1150 Lumen Spot
	20W	PAR38SP20/830/LED	PAR38, 3000K, 1200 Lumen Spot
	20W	PAR38SP20/840/LED	PAR38, 4000K Spot
	20W	PAR38SP20/850/LED	PAR38, 5000K, 1300 Lumen Spot
Litetronics	14W	LP14550FL2D†	BR30, 2700K, 925 Lumen
	14W	LP14550FL4D†	BR30, 3000K, 925 Lumen
	14W	LP14550FL6D†	BR30, 4000K, 925 Lumen
Philips	3.5W	9290002417†	Candle, 2700K, 150 Lumen, E12 Candelabra base
	3.5W	9290002419†	Candle, 2700K, 150 Lumen, E26 medium base, blunt tip clear
	6W	9290011348	A19, Daylight, 5000K, 450 Lumen, E26
	6.5W	9290011347 (455741)	A19, Warm Glow, 450 Lumen
	8W	9290002329	PAR20, 3000K, 470 Lumen, E26
	8.5W	9290002543	BR30, 5000K, 730 Lumen, 8.5W
	9.5W	9290011117	BR30, 2700K, 730 Lumen, WarmGlow to 2200K (Nov 2014 or later)
	9.5W	9290011345	A19, Soft White, 2200-2700K, 800 Lumen, E26
	9.5W	9290011118 (452359)	BR30 SlimStyle, 2700K, 650 Lumen, E26, 65WE
	9.5W	9290011118 (452383)	BR30 SlimStyle, 2700K, 650 Lumen, E26, 65WE
	9.5W	9290011118 (452417)	BR30 SlimStyle, 2700K, 650 Lumen, E26, 65WE
	9.5W	9290011119 (452441)	BR30 SlimStyle, 5000K, 650 Lumen, E26, 65WE
	9.5W	9290011119 (452466)	BR30 SlimStyle, 5000K, 650 Lumen, E26, 65WE
	9.5W	9290011119 (452482)	BR30 SlimStyle, 5000K, 650 Lumen, E26, 65WE
	10.5W	9290002544	BR30, 2700K, 730 Lumen
	10.5W	9290002707	A19 SlimStyle, Soft White, 2700K, 800 Lumen, 3pk
	11W	9290002268	A19, 2700K, 830 Lumen
	11W	9290002296	A19, 5000K, 830 Lumen
	12W	9290002580 (431392)	BR40, 2700K, 800 Lumen
	13W	9290002523 13PAR38/F25 3000 DIM AF RO	PAR38, 3000K, 950 Lumen
	15W	9290002426	A21, 2700K, 1180 Lumen
	15W	9290002595	A21, Soft White, 2700K, 1180 Lumen, E26
	15W	9290011111	PAR38, 3000K, 1050 Lumen, E26, Flood
	15W	9290011112	PAR38, 5000K, 1050 Lumen, E26, Flood
	18W	9290002202	PAR38, 3000K, 951 Lumen, Medium Base
	18W	9290002236	PAR38
	18W	9290002237	PAR38
	18W	9290002245	PAR38, 2700K, 938 Lumen
	18W	9290002246	PAR38
	18W	9290002307	PAR38
	18W	9290002308	PAR38
	18W	9290002309	PAR38
	18W	9290002310	PAR38
	18W	9290002311	PAR38
	18W	18E26PAR38-3	PAR38
	18W	18E26PAR38-4	PAR38
	19W	9290002473	PAR38, 3000K, 1250 Lumen
	19.5W	9290002251	PAR38, 3000K, 1210 Lumen
	19.5W	9290002252	PAR38, 2700K, 1183 Lumen
	19.5W	9290002253	PAR38, 3000K, 1212 Lumen
19.5W	9290002291	PAR38, 4000K, 1207 Lumen	
19.5W	9290002312	PAR38, 2700K, 1100 Lumen	
19.5W	9290002313	PAR38, 2700K, 1196 Lumen	
19.5W	9290002314	PAR38, 3000K, 1200 Lumen	

† Requires a minimum of 2 lamps

† † Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266J

Dimmable CFL & LED bulbs

Compatible with C•L® dimmers

List Updated August 4, 2015
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Maestro Wireless® C•L dimmers

Maestro Wireless: MRF2-6CL

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description	
Philips	19.5W	9290002315	PAR38, 3000K, 1225 Lumen	
	19.5W	9290002316	PAR38, 4000K, 1200 Lumen	
	19.5W	9290002317	PAR38, 4000K, 1245 Lumen	
	19.5W	9290002321	PAR38, 2700K, 1172 Lumen	
	19.5W	9290002322	PAR38, 5000K, 1300 Lumen	
	22W	9290002290	A21, 2700K, 1780 Lumen, Medium base	
Satco	8W	S8794	A19, 2700K, 450 Lumen, GU10	
	8W	S8995	A19, 3000K, 450 Lumen	
	9W	S8991	4" Downlight	
	11W	S9084	PAR30, 3000K, 780 Lumen, E26, short neck, 25° Beam	
	11W	S9085	PAR30, 4000K, 780 Lumen, E26, short neck, 25° Beam	
	11W	S9086	PAR30, 3000K, 780 Lumen, E26, short neck, 40° Beam	
	11W	S9087	PAR30, 4000K, 780 Lumen, E26, short neck, 40° Beam	
	11W	S9088	PAR30, 3000K, 780 Lumen, E26, long neck, 25° Beam	
	11W	S9089	PAR30, 4000K, 780 Lumen, E26, long neck, 25° Beam	
	11W	S9090	PAR30, 3000K, 780 Lumen, E26, long neck, 40° Beam	
	11W	S9091	PAR30, 4000K, 780 Lumen, E26, long neck, 40° Beam	
	13W	S9003	R40, 3000K, 880 Lumen	
	13W	S9046	R40, 2700K, 850 Lumen	
	13W	S9047	R40, 4000K, 920 Lumen	
	13W	S9048	R40, 5000K, 950 Lumen	
	17W	S8977-S8979	PAR38	
	17W	S8984-S8986	PAR38	
	17W	S9092	PAR38, 3000K, 1200 Lumen, E26, 25° beam	
	17W	S9093	PAR38, 4000K, 1200 Lumen, E26, 25° beam	
	17W	S9094	PAR38, 3000K, 1200 Lumen, E26, 40° beam	
	17W	S9095	PAR38, 4000K, 1200 Lumen, E26, 40° beam	
	Solais	7W	LRP20/25/27K	PAR20, 2700K, 475 Lumen, E26, 25° Beam
		7W	LRP20/25/30K	PAR20, 3000K, 500 Lumen, E26, 25° Beam
		7W	LRP20/40/27K	PAR20, 2700K, 475 Lumen, E26, 40° Beam
		7W	LRP20/40/30K	PAR20, 3000K, 500 Lumen, E26, 40° Beam
		11W	LR20/25/27K/675/xx	PAR20, 2700K, 675 Lumen, E26, narrow flood
		11W	LR20/25/30K/750	PAR20, 3000K, 750 Lumen, E26, narrow flood
11W		LR20/40/27K/675/xx	PAR20, 2700K, 675 Lumen, E26, wide flood	
11W		LR20/40/30K/750/xx	PAR20, 3000K, 750 Lumen, E26, wide flood	
16W		LR30/10/27K/1100/xx	PAR30, 2700K, 1100 Lumen, E26, short neck, 10° Beam	
16W		LR30/10/30K/1125/xx	PAR30, 3000K, 1125 Lumen, E26, short neck, 10° Beam	
16W		LR30/10/30K/1200/xx	PAR30, 3000K, 1200 Lumen, E26, short neck, 10° Beam	
16W		LR30/15/27K/1100/xx	PAR30, 2700K, 1100 Lumen, E26, short neck, 15° Beam	
16W		LR30/15/30K/1125/xx	PAR30, 3000K, 1125 Lumen, E26, short neck, 15° Beam	
16W		LR30/15/30K/1200/xx	PAR30, 3000K, 1200 Lumen, E26, short neck, 15° Beam	
16W		LR30/25/27K/1100/xx	PAR30, 2700K, 1100 Lumen, E26, short neck, 25° Beam	
16W		LR30/25/30K/1125/xx	PAR30, 3000K, 1125 Lumen, E26, short neck, 25° Beam	
16W		LR30/25/30K/1200/WH	PAR30, 3000K, 1200 Lumen, E26, short neck, 25° Beam	
16W		LR30/40/27K/1100/xx	PAR30, 2700K, 1100 Lumen, E26, short neck, 40° Beam	
16W		LR30/40/30K/1125/xx	PAR30, 3000K, 1125 Lumen, E26, short neck, 40° Beam	
16W		LR30/40/30K/1200/xx	PAR30, 3000K, 1200 Lumen, E26, short neck, 40° Beam	
16W		LRP38/25/27K	PAR38, 2700K, 1025 Lumen, E26, 25° Beam	
16W		LRP38/25/30K	PAR38, 3000K, 1100 Lumen, E26, 25° Beam	
16W		LRP38/40/27K	PAR38, 2700K, 1025 Lumen, E26, 40° Beam	
16W		LRP38/40/30K	PAR38, 3000K, 1100 Lumen, E26, 40° Beam	
20W		LR38/25/30K/1450/SL	PAR38, 3000K, 1450 Lumen, E26, 15° Beam	
28W		LR38/15/27K/2000/xx	PAR38, 2700K, 2000 Lumen, E26	
28W		LR38/15/30K/2100/xx	PAR38, 3000K, 2100 Lumen, E26	
28W		LR38/25/27K/2000/xx	PAR38, 2700K, 2000 Lumen, E26	
28W		LR38/25/30K/2100/xx	PAR38, 3000K, 2100 Lumen, E26	
28W		LR38/40/27K/2000/xx	PAR38, 2700K, 2000 Lumen, E26	
28W	LR38/40/30K/2100/xx	PAR38, 3000K, 2100 Lumen, E26		

† Requires a minimum of 2 lamps

†† Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266J



Dimmable CFL & LED bulbs

Compatible with C•L® dimmers

List Updated August 4, 2015
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Maestro Wireless® C•L dimmers

Maestro Wireless: MRF2-6CL

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description
Sylvania	13W	75FU202 [†]	A19, 3000K, 1100 Lumen, E26
	6W	79643	A19, Soft White, 2700K, 450 Lumen, E26, clear
	7W	LED7A19/DIM/0/SE/830 (78214)	A19, 3000K to 2000K, 450 Lumen, E26, Sunset Effect
	7W	LED7A19/DIM/0/SE/830/RP (78213)	A19, 3000K to 2000K, 450 Lumen, E26, Sunset Effect
	8W	LED8A19DIMO827RP	A19, 2700K, 470 Lumen, E26
	8W	LED8PAR16/DIM/930/FL36/P/LW [†]	PAR16, Soft White, 390 Lumen
	8W	LED8PAR16/GU10/DIM/930/FL36/RP [†]	PAR16, GU10, Soft White, 390 Lumen
	8W	LED8R20/DIM/SE/830/RP	R20, Soft White, 2700K to 2000K, 520 Lumen
	10W	LED10A19/DIM/0/SE/830	A19, 3000K, 800 Lumen
	10W	LED10A19/DIM/0/SE/830/RP (78215)	A19, 3000K, 800 Lumen
	10.5W	LED10A19/DIM/CL/O/827 (79146)	A19, 2700K, 800 Lumen, E26, 60WE
	10.5W	LED10A19/DIM/CL/O/827/BL (79147)	A19, 2700K, 800 Lumen, E26, 60WE
	10.5W	LED10A19/DIM/CL/O/827/G4 (79142)	A19, 2700K, 800 Lumen, E26, 60WE
	10.5W	LED10A19/DIM/CL/O/827/G4/BL (79143)	A19, 2700K, 800 Lumen, E26, 60WE
	10.5W	LED10A19/DIM/CL/O/827/RP (79644)	A19, 2700K, 800 Lumen, E26, 60WE
	10.5W	LED10A19/DIM/CL/O/850/G4 (79144)	A19, 5000K, 800 Lumen, E26, 60WE
	10.5W	LED10A19/DIM/CL/O/850/G4/BL (79145)	A19, 5000K, 800 Lumen, E26, 60WE
	11W	LED11BR30/DIM/HO/827/G3 (78413)	BR30, 2700K, 800 Lumen, E26
	11W	LED11BR30/DIM/HO/827/G3/RP (78415)	BR30, 2700K, 800 Lumen, E26
	11W	LED11BR30/DIM/HO/827/G3/RP (79121)	BR30, 2700K, 800 Lumen, E26
	11W	LED11PAR20/DIM/930/FL30/P2	PAR20, Soft White, 550 Lumen
	12W	LED12BR30/DIM/HO/827	BR30, 2700K, Medium base
	12W	LED12BR30/DIM/HO/827/HVP	BR30, 2700K, Medium base
	12W	LED12BR30/DIM/SE/830/RP	BR30, Soft White, 2700K to 2000K, 850 Lumen
	14W	LED14PAR38/DIM/830/FL40/W	PAR38, 3000K, 1050 Lumen, E26, Flood, 90WE
	14W	LED14PAR38/DIM/850/FL40WRP	PAR38, 5000K, 1050 Lumen, E26, Flood, 90WE
	16W	LED16BR40DIMHO827	BR40, 2700K, 1100Lumen
17W	LED17PAR30LN/DIM/830/WSP15/P	PAR30, 3000K, 1200 Lumen, E26, spot	
17W	LED17PAR30LN/DIM/830/WSP20	PAR30, 3000K, 1200 Lumen, E26, wide spot	
18W	LED18PAR38/DIM/827/NFL25 [†]	PAR38, 2700K, 860 Lumen	
20W	LED20PAR38/DIM/930/FL40/P2	PAR38, 3000K, 1000 Lumen,	
20W	LED20PAR38DIM830FL40	PAR38, 3000K, 1300 Lumen	
Toshiba	13W	LDRB1327WE6USD2 (13BR40/27K-T)	BR40, 2700K, 950 Lumen
	13W	LDRB1340WE6USD2 (13BR40/40L-T)	BR40, 4000K, 1050 Lumen
Utilitech	3W	LG161/2DM/IF/LED	G16.5, Warm White, 3000K, 200 Lumen, E12 base, frosted
	4.5W	LR14DMLED	R14, Soft White, 2700K, 300 Lumen, E26, 40WE
	4.8W	LA15DM/CL/300/LED	A15, Warm White, 3000K, 300 Lumen, E26, clear
	4.8W	LA15DM/IF/300/LED	A15, Warm White, 3000K, 300 Lumen, E26, frosted
	4.8W	LA15DMC/CL/300/LED	A15, Warm White, 3000K, 300 Lumen, E12 base, clear
	4.8W	LCFFCDM/300/LED	Candle, Warm White, 3000K, 300 Lumen, E12 base, clear flame tip
	4.8W	LCFFDM/300/LED	Candle, Warm White, 3000K, 300 Lumen, E12 base, frosted flame tip
	4.8W	LEFCDM/300/LED	Candle, Warm White, 3000K, 300 Lumen, E26 base, clear flame tip

[†] Requires a minimum of 2 lamps

^{††} Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266J

Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated August 4, 2015
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Maestro Wireless[®] C•L dimmers

Maestro Wireless: MRF2-6CL

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description
Utilitech	4.8W	LG161/2DM/CL/300/LED	G16.5, Warm White, 3000K, 300 Lumen, E12 base, clear
	4.8W	LG161/2DM/IF/300/LED	G16.5, Warm White, 3000K, 300 Lumen, E12 base, frosted
	4.8W	LGMDM/CL/300/LED	G16.5, Warm White, 3000K, 300 Lumen, E26, clear
	6.5W	LMR16/GU10/DM/LED [†]	MR16, GU10 base
	6.5W	LMR16DMGU10 [†]	MR16, GU10 base
	6.5W	LR16DMLED	R16, Soft White, 2700K, 400 Lumen, E26, 40WE
	8W	LG25DM/LEDG2 [†]	G25, Warm White, 3000K, 510 Lumen, E26
	9W	LR20HO/LED/G2	R20, Soft White, 650 Lumen, E26, flood
	9W	R20HO/LED/G2	R20, Soft White, 650 Lumen, E26, flood
	11W	DLS02-06A27D1E-WH-F2	5" or 6" Downlight, 2700K, 700 Lumen, E26 retrofit 2pk
	12W	LPAR30L/LEDG7/2	PAR30L, 3000K, 800 Lumen, E26, long neck, 2PK
	13W	DLS02-06A50D1E-WH-F1	5" or 6" Downlight, 5000K, 700 Lumen, E26 retrofit
	13W	LBR30DM/LEDG2	BR30
	13.5W	LA19/OM800/LED [†]	A19, 3000K, 800 Lumen, Omni Directional
	15W	LBR30HO/LED/G2	BR30, Soft White, 1150 Lumen
	16W	LBR40DMLEDG2	BR40, 2700K, 1065 Lumen
	16W	LPAR38LEDG72	PAR38, 3000K, 950 Lumen, 2PK
	17W	BPCEBR40/DM/LED [†]	BR40
	17W	LBR40DM/LED [†]	BR40, 2700K, 1065 Lumen
	20W	L20PAR38/LEDG5	PAR38, 3000K, 1000 Lumen, flood
	20W	LBR40HO/LED/G2	BR40, Soft White, 1400 Lumen
	20W	LPAR38/5K/LEDG5	PAR38, 5000K, 1000 Lumen, flood
	20W	LPAR38/LEDG5	PAR38, 3000K, 1000 Lumen, flood
	20W	LPAR38DM/SP/LED	PAR38, 3000K, 1000 Lumen, Spot
	20.5W	LPAR381400LEDG72	PAR38, 1450 Lumen, 2PK

† Requires a minimum of 2 lamps
†† Requires a minimum of 3 lamps
© Lutron Electronics Co., Inc. | PN 368-3266J

Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated August 4, 2015
 For the most up-to-date list, visit
www.lutron.com/dimcflled



CFL bulbs for Maestro Wireless[®] C•L dimmers

Maestro Wireless: MRF2-6CL

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description
GE	26W	FLE26HT3/2/DV/SW	Spiral
	14W	4R2014TD	R20, TruDim, 2700K
TCP	14W	4R2014TD30K	R20, TruDim, 3000K
	14W	4R2014TD35K	R20, TruDim, 3500K
	14W	4R2014TD41K	R20, TruDim, 4100K
	14W	4R2014TD50K	R20, TruDim, 5000K
	14W	4R2014TD65K	R20, TruDim, 6500K

† Requires a minimum of 2 lamps
 †† Requires a minimum of 3 lamps
 © Lutron Electronics Co., Inc. | PN 368-3266J

Dimmable CFL & LED bulbs

Compatible with C•L® dimmers

List Updated August 4, 2015
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Caséta® Wireless in-wall dimmer

Caséta Wireless in-wall dimmer: PD-6WCL

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description
Cree	6W	BA19-04527OMF-12DE26-3U100	A19 4Flow, 2700K, 460 Lumen, E26
	6W	BA19-04550OMF-12DE26-3U100	A19 4Flow, 5000K, 460 Lumen, E26
	9.5W	BA19-08027OMF-12DE26-2U100	A19, Soft White, 2700K, 800 Lumen, Medium base
	9.5W	BA19-08027OMF-12DE26-2U500	A19, 2700K, 800 Lumen, E26, 60WE, 4pk
	9.5W	CR4-575L	4" Downlight, 2700K, 575 Lumen, Medium Base
	9.5W	CR6-575L	6" Downlight, 2700K, Medium Base
	9.5W	CR6-575L-GU24	6" Downlight, 2700K, GU24 Base
	9.5W	H1CR6TW62527E04	6" Downlight, 2700K, 625 Lumen
	12.5W	DRDL6-06227009-12DE26-1C100	6" Downlight, 2700K TW, 625 Lumen, E26 retrofit
	12.5W	DRDL6-06250009-12DE26-1C100	6" Downlight, 5000K TW, 625 Lumen, E26 retrofit
	18W	BA21-16027OMF-12DE26-1U100	A21, 2700K, 1600 Lumen, E26, 18W
	18W	BA21-16050OMF-12DE26-1U100	A21, 5000K, 1600 Lumen, E26, 18W
	18W	BPAR38-1503027T-12DE26-1U100	PAR38, 3000K, 1500 Lumen, 27 deg spot
	18W	BPAR38-1503047T-12DE26-1U100	PAR38, 3000K, 1500 Lumen, 47 deg flood
	EcoSmart	7W	ECS BR20 50WE CW 120 G1 BL
8W		ECS 19 CW 120	A19, Cool White, 5000K
8W		ECS 19 WW 120	A19, Warm White, 3000K
8W		ECS 20 CW FL 50WE 120	PAR20, 5000K, 490 Lumen
8W		ECS 20 WW FL 50WE 120	PAR20, 3000K, 450 Lumen
9.5W		ECO4-575L	4" Downlight, 2700K, 575 Lumen, Medium Base
9.5W		ECO4-575L-50K	4" Downlight, 5000K, 575 Lumen, Medium Base
9.5W		ECO4-575L-50K-GU24	4" Downlight, 5000K, GU24 Base
9.5W		ECO-575L	6" Downlight, 2700K, Medium Base
9.5W		ECO-575L-50K	6" Downlight, 5000K, Medium Base
9.5W		ECO-575L-50K-GU24	6" Downlight, 5000K, GU24 Base
9.5W		ECO-575L-GU24	6" Downlight, 2700K, GU24 Base
9.5W		ECS DN4 CW E26 120	4" Downlight, Daylight, 5000K, 650 Lumen, E26, retrofit
9.5W		ECS DN4 CW GU24 120	4" Downlight, Daylight, 5000K, 650 Lumen, GU24 base, retrofit
9.5W		ECS DN4 W27 E26 120	4" Downlight, Soft White, 2700K, 650 Lumen, E26 retrofit
9.5W		ECS DN4 W27 GU24 120	4" Downlight, Soft White, 2700K, 650 Lumen, GU24 base, retrofit
9.5W		ECS DN6 CW GU24 120	6" Downlight, Daylight, 5000K, 650 Lumen, GU24 base, retrofit
9.5W		ECS DN6 W27 GU24 120	6" Downlight, Soft White, 2700K, 650 Lumen, GU24 base, retrofit
10W		ECS BR30 65WE CW 120 DG	BR30, Daylight, 5000K, 700 Lumen, E26
10W		ECS BR30 65WE CW 120 DG 3PK	BR30, Daylight, 5000K, 700 Lumen, E26, 3pk
10W		ECS BR30 65WE W27 120 DG	BR30, Soft White, 2700K, 650 Lumen, E26
10W		ECS BR30 65WE W27 120 DG 3BX	BR30, Soft White, 2700K, 650 Lumen, E26, 3pk
10W		ECS BR30 65WE WW 120 DG	BR30, Warm White, 3000K, 650 Lumen, E26
10.5W		ECS 30 75WE WW GB FL 120	PAR30 Gimbal, 3000K, 750 Lumen, E26, 75WE
10.5W		ECS 30 75WE xxx GB xx 120	PAR30 Gimbal, Various color temperatures, 75WE
11.5W		ECS BR30 65WE CW 120	BR30, 5000K, Medium Base
11.5W		ECS BR30 65WE W27 120	BR30, 2700K, 650 Lumen, Medium Base
14W	ECS BR40 90WE CW 120 DG	BR40, Daylight, 5000K, 1050 Lumen, E26	
14W	ECS BR40 90WE W27 120 DG	BR40, 2700K, 1000 Lumen, E26	
15W	ECS BR30 W27 FL 120	BR30, Soft White, 2700K	
24W	ECS 38 V2 WW FL 120	PAR38, Warm White, 3000K	
Energetic	17.5W	ELY17D-2BRW-VB†	BR40, 2700K, 1100 Lumen
Feit	4.5W	R14DM/LED	R14, Soft White, 2700K, 300 Lumen, E26, 40WE
	5W	MR16/GU10/DM/LED†	MR16, GU10 Base
	6.5W	BPMR16/GU10/DM/LED†	MR16, GU10 base
	6.5W	MR16/GU10/DM/LED†	MR16, GU10 base
	6.5W	R16DM/LED†	R16, Soft White, 2700K, 400 Lumen, E26, 40WE
	7.5W	PAR20DM/5K/LED†	PAR20, 5000K
	7.5W	PAR20DM/LED†	PAR20, 3000K
	8W	BPCER20/DM/LED	R20, 2700K, 450 Lumen, E26 Medium base (70 mA smooth reflector version)
	8W	R20/927/LED	R20, 2700K

† Requires a minimum of 2 lamps

†† Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266J

Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated August 4, 2015
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Caséta[®] Wireless in-wall dimmer

Caséta Wireless in-wall dimmer: PD-6WCL

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description
Feit	8W	R20/930/LED	R20, 3000K
	8W	R20/950/LED	R20, 5000K,
	8W	R20DM/LEDG2/CAN	R20, 2700K
	13W	BPCEBR30LED	BR30
	13.5W	A19/OM800/5K/LED	A19, 5000K, Omni Directional
	13.5W	A19/OM800/LED	A19, 3000K, Omni Directional
	13.5W	BPCEA19/OM800/LED	A19, Omni Directional
	13.5W	BPCEA19/OM800/LED/CAN	A19, Omni Directional
	14W	LEDR56/830	Downlight, 3000K, 925 Lumen, retrofit kit
	17W	BR40/DM/LED [†]	BR40, 2700K, 1065 Lumen
20.5W	LEDR56/827	5" or 6" Downlight, 2700K, 1245 Lumen	
GE	8W	LED8DA19/827	A19, 2700K, 450 Lumen, E26
	14W	LED14DA21V2/827W	A21, 2700K, 1100 Lumen, E26
Lighting Science	8W	DFN 19 CW 120	A19, Cool White, 5000K
	8W	DFN 19 NW 120	A19, Neutral White, 4000K
	8W	DFN 19 W27 120	A19, Warm White, 2700K
	8W	DFN 19 WW 120	A19, Warm White, 3000K
	10.5W	LS 30 75WE xxx GB xx 120	PAR30, various color temperatures
	11.5W	DFN BR30 65WE CW 120	BR30, Cool White, 5000K, Medium base
	11.5W	DFN BR30 65WE NW 120	BR30, Neutral White, 4000K, Medium base
	11.5W	DFN BR30 65WE W27 120	BR30, Warm White, 2700K, Medium base
	11.5W	DFN BR30 65WE WW 120	BR30, Warm White, 3000K, Medium base
	13W	LS GLP6 W27 120 WH S1 BX	6" Downlight, 2700K, E26 retrofit
	15W	DFN BR30 CW FL 120	BR30, Cool White, 5000K
	15W	DFN BR30 NW FL 120	BR30, Neutral White, 4000K
	15W	DFN BR30 W27 FL 120	BR30, Warm White, 2700K
	15W	DFN BR30 WW FL 120	BR30, Warm White, 3000K
	24W	DFN 38 CW V2 FL 120	PAR38, Cool White, 5000K
	24W	DFN 38 CW V2 NFL 120	PAR38, Cool White, 5000K
	24W	DFN 38 NW V2 FL 120	PAR38, Neutral White, 4000K
	24W	DFN 38 NW V2 NFL 120	PAR38, Neutral White, 4000K
	24W	DFN 38 W27 V2 FL 120	PAR38, Warm White, 2700K
	24W	DFN 38 W27 V2 NFL 120	PAR38, Warm White, 2700K
	24W	DFN 38 WW V2 FL 120	PAR38, Warm White, 3000K
	24W	DFN 38 WW V2 NFL 120	PAR38, Warm White, 3000K
Lumapro	8W	8A19/LED/DIM/30	A19, Warm White, 3000K (6GEM2)
	8W	8A19/LED/DIM/50	A19, Cool White, 5000K (6GEM3)
Philips	4.5W	9290002439	Candle, Warm White, 2700K, 320 Lumen, E26 base, Post Light
	4.5W	9290002797 ^{††}	Candle, 2700K, 330 Lumen, E26, blunt tip
	4.5W	9290002889 ^{††}	Candle, 2700K, 330 Lumen, E12, blunt tip
	4.5W	9290002890 ^{††}	A15, 2700K, 330 Lumen, E12
	4.5W	9290002891 ^{††}	A15, 2700K, 330 Lumen, E26
	6W	9290002242	MR16, 3000K, 300 Lumen, GU10 base
	6.5W	9290011347 (455741)	A19, Warm Glow, 450 Lumen
	7W	9290002706	A19 SlimStyle, Daylight, 5000K, 450 Lumen, E26
	8W	9290002267	A19, 2700K, 470 Lumen
	8W	9290002295	A19, 5000K, 470 Lumen
	8W	9290002329	PAR20, 3000K, 470 Lumen, E26
	8.5W	9290002543	BR30, 5000K, 730 Lumen, 8.5W
	9.5W	9290011117	BR30, 2700K, 730 Lumen, WarmGlow to 2200K (Nov 2014 or later)
	9.5W	9290011118 (452359)	BR30 SlimStyle, 2700K, 650 Lumen, E26, 65WE
	9.5W	9290011118 (452383)	BR30 SlimStyle, 2700K, 650 Lumen, E26, 65WE
	9.5W	9290011118 (452417)	BR30 SlimStyle, 2700K, 650 Lumen, E26, 65WE
	9.5W	9290011119 (452441)	BR30 SlimStyle, 5000K, 650 Lumen, E26, 65WE
9.5W	9290011119 (452466)	BR30 SlimStyle, 5000K, 650 Lumen, E26, 65WE	
9.5W	9290011119 (452482)	BR30 SlimStyle, 5000K, 650 Lumen, E26, 65WE	
10.5W	9290002544	BR30, 2700K, 730 Lumen	

[†] Requires a minimum of 2 lamps

^{††} Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266J

Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated August 4, 2015
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Caséta[®] Wireless in-wall dimmer

Caséta Wireless in-wall dimmer: PD-6WCL

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description
Philips	10.5W	9290002707	A19 SlimStyle, Soft White, 2700K, 800 Lumen, 3pk
	11W	9290002268	A19, 2700K, 830 Lumen
	11W	9290002296	A19, 5000K, 830 Lumen
	11W	9290011113	PAR30L, 3000K, ? Lumen, E26
	12W	9290002580 (431392)	BR40, 2700K, 800 Lumen
	13W	9290002201	PAR30, 3000K, 750 Lumen
	13W	9290002233	PAR30, 2700K, 784 Lumen
	13W	9290002234	PAR30, 2700K, 770 Lumen
	13W	9290002323	PAR30, 5000K, 850 Lumen
	13W	9290011120	A21 SlimStyle, 2700K, 1100 Lumen
	13W	9290002523 13PAR38/F25 3000 DIM AF RO	PAR38, 3000K, 950 Lumen
	14.5W	9290002199	BR40, 2700K, 832 Lumen
	15W	9290002595	A21, Soft White, 2700K, 1180 Lumen, E26
	15W	9290011111	PAR38, 3000K, 1050 Lumen, E26, Flood
	15W	9290011112	PAR38, 5000K, 1050 Lumen, E26, Flood
	17W	9290002018 [†]	A21, 2700K
	17W	17E26A21D [†]	A21, 2700K
	18W	9290002202	PAR38, 3000K, 951 Lumen, Medium Base
	18W	9290002236	PAR38
	18W	9290002237	PAR38
	18W	9290002245	PAR38, 2700K, 938 Lumen
	18W	9290002246	PAR38
	18W	9290002307	PAR38
	18W	9290002308	PAR38
	18W	9290002309	PAR38
	18W	9290002310	PAR38
	18W	9290002311	PAR38
	18W	18E26PAR38-3	PAR38
18W	18E26PAR38-4	PAR38	
Samsung	7W	STIPLW8300711AB	SI-P8V071AB0US
Satco	11W	S9084	PAR30, 3000K, 780 Lumen, E26, short neck, 25° Beam
	11W	S9085	PAR30, 4000K, 780 Lumen, E26, short neck, 25° Beam
	11W	S9086	PAR30, 3000K, 780 Lumen, E26, short neck, 40° Beam
	11W	S9087	PAR30, 4000K, 780 Lumen, E26, short neck, 40° Beam
	11W	S9088	PAR30, 3000K, 780 Lumen, E26, long neck, 25° Beam
	11W	S9089	PAR30, 4000K, 780 Lumen, E26, long neck, 25° Beam
	11W	S9090	PAR30, 3000K, 780 Lumen, E26, long neck, 40° Beam
	11W	S9091	PAR30, 4000K, 780 Lumen, E26, long neck, 40° Beam
	17W	S9092	PAR38, 3000K, 1200 Lumen, E26, 25° beam
	17W	S9093	PAR38, 4000K, 1200 Lumen, E26, 25° beam
	17W	S9094	PAR38, 3000K, 1200 Lumen, E26, 40° beam
	17W	S9095	PAR38, 4000K, 1200 Lumen, E26, 40° beam
Solais	7W	LRP20/25/27K	PAR20, 2700K, 475 Lumen, E26, 25° Beam
	7W	LRP20/25/30K	PAR20, 3000K, 500 Lumen, E26, 25° Beam
	7W	LRP20/40/27K	PAR20, 2700K, 475 Lumen, E26, 40° Beam
	7W	LRP20/40/30K	PAR20, 3000K, 500 Lumen, E26, 40° Beam
	11W	LR20/25/27K/675/xx	PAR20, 2700K, 675 Lumen, E26, narrow flood
	11W	LR20/25/30K/750	PAR20, 3000K, 750 Lumen, E26, narrow flood
	11W	LR20/40/27K/675/xx	PAR20, 2700K, 675 Lumen, E26, wide flood
	11W	LR20/40/30K/750/xx	PAR20, 3000K, 750 Lumen, E26, wide flood
	16W	LR30/10/27K/1100/xx	PAR30, 2700K, 1100 Lumen, E26, short neck, 10° Beam
	16W	LR30/10/30K/1125/xx	PAR30, 3000K, 1125 Lumen, E26, short neck, 10° Beam
	16W	LR30/10/30K/1200/xx	PAR30, 3000K, 1200 Lumen, E26, short neck, 10° Beam
	16W	LR30/15/27K/1100/xx	PAR30, 2700K, 1100 Lumen, E26, short neck, 15° Beam
	16W	LR30/15/30K/1125/xx	PAR30, 3000K, 1125 Lumen, E26, short neck, 15° Beam
	16W	LR30/15/30K/1200/xx	PAR30, 3000K, 1200 Lumen, E26, short neck, 15° Beam

[†] Requires a minimum of 2 lamps

^{††} Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266J



Dimmable CFL & LED bulbs

Compatible with C•L® dimmers

List Updated August 4, 2015
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Caséta® Wireless in-wall dimmer

Caséta Wireless in-wall dimmer: PD-6WCL

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description	
Solais	16W	LR30/25/27K/1100/xx	PAR30, 2700K, 1100 Lumen, E26, short neck, 25° Beam	
	16W	LR30/25/30K/1125/xx	PAR30, 3000K, 1125 Lumen, E26, short neck, 25° Beam	
	16W	LR30/25/30K/1200/WH	PAR30, 3000K, 1200 Lumen, E26, short neck, 25° Beam	
	16W	LR30/40/27K/1100/xx	PAR30, 2700K, 1100 Lumen, E26, short neck, 40° Beam	
	16W	LR30/40/30K/1125/xx	PAR30, 3000K, 1125 Lumen, E26, short neck, 40° Beam	
	16W	LR30/40/30K/1200/xx	PAR30, 3000K, 1200 Lumen, E26, short neck, 40° Beam	
	16W	LRP38/25/27K	PAR38, 2700K, 1025 Lumen, E26, 25° Beam	
	16W	LRP38/25/30K	PAR38, 3000K, 1100 Lumen, E26, 25° Beam	
	16W	LRP38/40/27K	PAR38, 2700K, 1025 Lumen, E26, 40° Beam	
	16W	LRP38/40/30K	PAR38, 3000K, 1100 Lumen, E26, 40° Beam	
	20W	LR38/25/30K/1450/SL	PAR38, 3000K, 1450 Lumen, E26, 15° Beam	
	28W	LR38/15/27K/2000/xx	PAR38, 2700K, 2000 Lumen, E26	
	28W	LR38/15/30K/2100/xx	PAR38, 3000K, 2100 Lumen, E26	
	28W	LR38/25/27K/2000/xx	PAR38, 2700K, 2000 Lumen, E26	
	28W	LR38/25/30K/2100/xx	PAR38, 3000K, 2100 Lumen, E26	
	28W	LR38/40/27K/2000/xx	PAR38, 2700K, 2000 Lumen, E26	
	28W	LR38/40/30K/2100/xx	PAR38, 3000K, 2100 Lumen, E26	
	Sylvania	6W	79643	A19, Soft White, 2700K, 450 Lumen, E26, clear
		7W	LED7A19/DIM/0/SE/830 (78214)	A19, 3000K to 2000K, 450 Lumen, E26, Sunset Effect
		7W	LED7A19/DIM/0/SE/830/RP (78213)	A19, 3000K to 2000K, 450 Lumen, E26, Sunset Effect
8W		LED8A/DIM/F/827	A19, 2700K	
8W		LED8A/DIM/F/830	A19, 3000K	
8W		LED8A19DIMO827RP	A19, 2700K, 470 Lumen, E26	
8W		LED8PAR16/DIM/930/FL36/P/LW	PAR16, Soft White, 390 Lumen	
8W		LED8PAR16/GU10/DIM/930/FL36/RP	PAR16, GU10, Soft White, 390 Lumen	
9W		LED/550/RT4/827/FL80/WRFL	4" Downlight, 2700K	
9W		LED/550/RT4/830/FL80/WRFL	4" Downlight, 3000K	
10W		LED10A19/DIM/0/SE/830	A19, 3000K, 800 Lumen	
10W		LED10A19/DIM/0/SE/830/RP (78215)	A19, 3000K, 800 Lumen	
10.5W		LED10A19/DIM/CL/O/827 (79146)	A19, 2700K, 800 Lumen, E26, 60WE	
10.5W		LED10A19/DIM/CL/O/827/BL (79147)	A19, 2700K, 800 Lumen, E26, 60WE	
10.5W		LED10A19/DIM/CL/O/827/G4 (79142)	A19, 2700K, 800 Lumen, E26, 60WE	
10.5W		LED10A19/DIM/CL/O/827/G4/BL (79143)	A19, 2700K, 800 Lumen, E26, 60WE	
10.5W		LED10A19/DIM/CL/O/827/RP (79644)	A19, 2700K, 800 Lumen, E26, 60WE	
10.5W		LED10A19/DIM/CL/O/850/G4 (79144)	A19, 5000K, 800 Lumen, E26, 60WE	
10.5W		LED10A19/DIM/CL/O/850/G4/BL (79145)	A19, 5000K, 800 Lumen, E26, 60WE	
11W		LED11BR30/DIM/HO/827/G3 (78413)	BR30, 2700K, 800 Lumen, E26	
11W	LED11BR30/DIM/HO/827/G3/RP (78415)	BR30, 2700K, 800 Lumen, E26		
11W	LED11BR30/DIM/HO/827/G3/RP (79121)	BR30, 2700K, 800 Lumen, E26		
11W	LED11PAR20/DIM/930/FL30/P2	PAR20, Soft White, 550 Lumen		
12W	LED12BR30/DIM/HO/827	BR30, 2700K, Medium base		
12W	LED12BR30/DIM/HO/827/HVP	BR30, 2700K, Medium base		
17W	LED17PAR30LN/DIM/830/WSP15/P	PAR30, 3000K, 1200 Lumen, E26, spot		
17W	LED17PAR30LN/DIM/830/WSP20	PAR30, 3000K, 1200 Lumen, E26, wide spot		

† Requires a minimum of 2 lamps
†† Requires a minimum of 3 lamps
© Lutron Electronics Co., Inc. | PN 368-3266J

Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated August 4, 2015
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Caséta[®] Wireless in-wall dimmer

Caséta Wireless in-wall dimmer: PD-6WCL

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description
Sylvania	17W	LED17PAR30LN/DIM/P/930/NFL25 [†]	PAR30, 3000K, 900 Lumen
	20W	LED20PAR38/DIM/930/FL40/P2	PAR38, 3000K, 1000 Lumen,
	21W	LED21/PAR38/DIM/P/930/FL30/HVP	PAR38, Warm White, 3000K, 1100 Lumen, E26, 21W
	21W	LED21PAR38/DIM/P/930/FL30	PAR38, 3000K, 1100 Lumen
Utilitech	3W	LG161/2DM/IF/LED [†]	G16.5, Warm White, 3000K, 200 Lumen, E12 base, frosted
	4.5W	LR14DMLED	R14, Soft White, 2700K, 300 Lumen, E26, 40WE
	4.8W	LA15DM/CL/300/LED [†]	A15, Warm White, 3000K, 300 Lumen, E26, clear
	4.8W	LA15DM/IF/300/LED [†]	A15, Warm White, 3000K, 300 Lumen, E26, frosted
	4.8W	LA15DMC/CL/300/LED [†]	A15, Warm White, 3000K, 300 Lumen, E12 base, clear
	4.8W	LCFCDM/300/LED [†]	Candle, Warm White, 3000K, 300 Lumen, E12 base, clear flame tip
	4.8W	LCFFDM/300/LED [†]	Candle, Warm White, 3000K, 300 Lumen, E12 base, frosted flame tip
	4.8W	LEFCDM/300/LED [†]	Candle, Warm White, 3000K, 300 Lumen, E26 base, clear flame tip
	4.8W	LG161/2DM/CL/300/LED [†]	G16.5, Warm White, 3000K, 300 Lumen, E12 base, clear
	4.8W	LG161/2DM/IF/300/LED [†]	G16.5, Warm White, 3000K, 300 Lumen, E12 base, frosted
	4.8W	LGMDM/CL/300/LED [†]	G16.5, Warm White, 3000K, 300 Lumen, E26, clear
	5W	LMR16GU10DM/LED [†]	MR16, GU10 Base
	6.5W	LMR16/GU10/DM/LED [†]	MR16, GU10 base
	6.5W	LMR16DMGU10 [†]	MR16, GU10 base
	6.5W	LR16DMLED [†]	R16, Soft White, 2700K, 400 Lumen, E26, 40WE
	7.5W	LPAR20DM/5K/LED [†]	PAR20, 5000K
	7.5W	LPAR20DM/LED [†]	PAR20, 3000K
	8W	LG25DM/LEDG2 [†]	G25, Warm White, 3000K, 510 Lumen, E26
	8W	LR20DMLEDG2	R20, 2700K, 450 Lumen, E26 Medium base (70 mA smooth reflector version)
	9W	LR20HO/LED/G2	R20, Soft White, 650 Lumen, E26, flood
	9W	R20HO/LED/G2	R20, Soft White, 650 Lumen, E26, flood
	11W	DLS02-04A27D1E-WH-F1	4" Downlight, 2700K, 600 Lumen, E26 retrofit
	11W	DLS02-04A27D1E-WH-F2	4" Downlight, 2700K, 600 Lumen, E26 retrofit 2pk
	11W	DLS02-06A27D1E-WH-F2	5" or 6" Downlight, 2700K, 700 Lumen, E26 retrofit 2pk
	11W	DLS02-41127D1E-WF1	4" Downlight, Soft White, 2700K, 650 Lumen, E26 retrofit
	12W	LPAR30L/LEDG7/2	PAR30L, 3000K, 800 Lumen, E26, long neck, 2PK
	12W	MQTL1017-LED11.5K850 [†]	Downlight, 5000K, 800 Lumen, E26 retrofit kit
	13W	DLS02-06A50D1E-WH-F1	5" or 6" Downlight, 5000K, 700 Lumen, E26 retrofit
	13W	DLS02-61327D1E-WF1	5" or 6" Downlight, Soft White, 2700K, 800 Lumen, E26 retrofit
	13W	DLS02-61350D1E-WF1	5" or 6" Downlight, Daylight, 5000K, 800 Lumen, E26 retrofit
	13W	LBR30DM/LEDG2	BR30
	13.5W	LA19/OM800/LED	A19, 3000K, 800 Lumen, Omni Directional
	15W	LBR30HO/LED/G2	BR30, Soft White, 1150 Lumen
16W	LPAR38LEDG72	PAR38, 3000K, 950 Lumen, 2PK	
17W	BPCEBR40/DM/LED [†]	BR40	
17W	LBR40DM/LED [†]	BR40, 2700K, 1065 Lumen	
17.5W	YGA08A35-17.5W-827 [†]	BR40, 2700K, 1100 Lumen	
20W	LBR40HO/LED/G2	BR40, Soft White, 1400 Lumen	
20.5W	LPAR381400LEDG72	PAR38, 1450 Lumen, 2PK	
Westinghouse	8W	8A19/LED/DIM/30	A19, Warm White, 3000K
	8W	8A19/LED/DIM/50	A19, Cool White, 5000K

† Requires a minimum of 2 lamps
†† Requires a minimum of 3 lamps
© Lutron Electronics Co., Inc. | PN 368-3266J

Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated August 4, 2015
 For the most up-to-date list, visit
www.lutron.com/dimcflled



CFL bulbs for Caséta[®] Wireless in-wall dimmer

Caséta Wireless in-wall dimmer: PD-6WCL

Maximum wattage controlled: 150W



Brand	Wattage	Model	Description
GE	26W	FLE26HT3/2/DV/SW	Spiral
	14W	4R2014TD	R20, TruDim, 2700K
TCP	14W	4R2014TD30K	R20, TruDim, 3000K
	14W	4R2014TD35K	R20, TruDim, 3500K
	14W	4R2014TD41K	R20, TruDim, 4100K
	14W	4R2014TD50K	R20, TruDim, 5000K
	14W	4R2014TD65K	R20, TruDim, 6500K

† Requires a minimum of 2 lamps
 †† Requires a minimum of 3 lamps
 © Lutron Electronics Co., Inc. | PN 368-3266J

Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated August 4, 2015
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Caséta[®] Wireless plug-in lamp dimmer

Caséta Wireless plug-in lamp dimmer: PD-3PCL

Maximum wattage controlled: 100W



Brand	Wattage	Model	Description
Cree	6W	BA19-04527OMF-12DE26-1U100	A19, Warm Soft White, 2700K, 450 Lumen, Medium base
	6W	BA19-04527OMF-12DE26-2U100	A19, Warm Soft White, 2700K, 450 Lumen, Medium base
	6W	BA19-04550OMF-12DE26-2U500	A19, 5000K, 450 Lumen, 40WE, 4pk
	9.5W	BA19-08027OMF-12DE26-2U100	A19, Soft White, 2700K, 800 Lumen, Medium base
	9.5W	BA19-08027OMF-12DE26-2U500	A19, 2700K, 800 Lumen, E26, 60WE, 4pk
	18W	BA21-16027OMF-12DE26-1U100	A21, 2700K, 1600 Lumen, E26, 18W
EcoSmart	8W	ECS 19 CW 120	A19, Cool White, 5000K
	8W	ECS 19 WW 120	A19, Warm White, 3000K
Feit	7.5W	PAR20DM/5K/LED [†]	PAR20, 5000K
	7.5W	PAR20DM/LED [†]	PAR20, 3000K
	9.5W	BPCER20/DM/LED	PAR20
	9.5W	PAR20/5K/LEDG5	PAR20, 5000K
	9.5W	PAR20/5K/LEDG5/CAN	PAR20, 5000K
	9.5W	PAR20/LEDG5	PAR20, 3000K, 450 Lumen
	9.5W	PAR20/LEDG5/CAN	PAR20
	10W	G25/DM/LED	G25, 3000K
	13.5W	A19/OM800/5K/LED	A19, 5000K, Omni Directional
	13.5W	A19/OM800/LED	A19, 3000K, Omni Directional
	13.5W	BPCEA19/OM800/LED	A19, Omni Directional
	13.5W	BPCEA19/OM800/LED/CAN	A19, Omni Directional
	GE	18W	LED18D38W827/15
18W		LED18D38W827/25	PAR38, 2700K, E26, 25° Beam
18W		LED18D38W827/40	PAR38, 2700K, E26, 40° Beam
18W		LED18D38W830/15	PAR38, 3000K, 1400 Lumen, E26, 15° Beam
18W		LED18D38W830/25	PAR38, 3000K, 1400 Lumen, E26, 25° Beam
18W		LED18D38W830/40	PAR38, 3000K, 1400 Lumen, E26, 40° Beam
18W		LED18D38W927/15	PAR38, 2700K, 1100 Lumen, E26, 15° Beam
18W		LED18D38W927/25	PAR38, 2700K, 1100 Lumen, E26, 25° Beam
18W		LED18D38W927/40	PAR38, 2700K, 1100 Lumen, E26, 40° Beam
18W		LED18D38W930/15	PAR38, 3000K, 1200 Lumen, E26, 15° Beam
18W		LED18D38W930/25	PAR38, 3000K, 1200 Lumen, E26, 25° Beam
18W		LED18D38W930/40	PAR38, 3000K, 1200 Lumen, E26, 40° Beam
Lighting Science		8W	DFN 19 CW 120
	8W	DFN 19 NW 120	A19, Neutral White, 4000K
	8W	DFN 19 W27 120	A19, Warm White, 2700K
	8W	DFN 19 WW 120	A19, Warm White, 3000K
Lumapro	8W	8A19/LED/DIM/30	A19, Warm White, 3000K (6GEM2)
	8W	8A19/LED/DIM/50	A19, Cool White, 5000K (6GEM3)
Philips	8W	9290002267	A19, 2700K, 470 Lumen
	8W	9290002295	A19, 5000K, 470 Lumen
	9.5W	9290011345	A19, Soft White, 2200-2700K, 800 Lumen, E26
	11W	9290002268	A19, 2700K, 830 Lumen
	11W	9290002296	A19, 5000K, 830 Lumen
	13W	9290011120	A21 SlimStyle, 2700K, 1100 Lumen
	14.5W	9290002199	BR40, 2700K, 832 Lumen
	15W	9290002595	A21, Soft White, 2700K, 1180 Lumen, E26
Samsung	7W	STIPLW8300711AB	SI-P8V071AB0US
	10.5W	S9037	A19, 2700K, 810 Lumen, E26
Satco	10.5W	S9038	A19, 3500K, 830 Lumen, E26
	10.5W	S9039	A19, 5000K, 870 Lumen, E26
	8W	LED8A/DIM/F/827	A19, 2700K
Sylvania	8W	LED8A/DIM/F/830	A19, 3000K
	8W	LED8A19DIMO827RP	A19, 2700K, 470 Lumen, E26
	10.5W	LED10A19/DIM/CL/O/827 (79146)	A19, 2700K, 800 Lumen, E26, 60WE

† Requires a minimum of 2 lamps
†† Requires a minimum of 3 lamps
© Lutron Electronics Co., Inc. | PN 368-3266J

Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated August 4, 2015
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Caséta[®] Wireless plug-in lamp dimmer

Caséta Wireless plug-in lamp dimmer: PD-3PCL

Maximum wattage controlled: 100W



Brand	Wattage	Model	Description
Sylvania	10.5W	LED10A19/DIM/CL/O/827/BL (79147)	A19, 2700K, 800 Lumen, E26, 60WE
	10.5W	LED10A19/DIM/CL/O/827/G4 (79142)	A19, 2700K, 800 Lumen, E26, 60WE
	10.5W	LED10A19/DIM/CL/O/827/G4/BL (79143)	A19, 2700K, 800 Lumen, E26, 60WE
	10.5W	LED10A19/DIM/CL/O/827/RP (79644)	A19, 2700K, 800 Lumen, E26, 60WE
	10.5W	LED10A19/DIM/CL/O/850/G4 (79144)	A19, 5000K, 800 Lumen, E26, 60WE
	10.5W	LED10A19/DIM/CL/O/850/G4/BL (79145)	A19, 5000K, 800 Lumen, E26, 60WE
Utilitech	7.5W	LA19DM/LEDG2	A19, 3000K, 450 Lumen
	7.5W	LPAR20DM/5K/LED [†]	PAR20, 5000K
	7.5W	LPAR20DM/LED [†]	PAR20, 3000K
	8W	LG25DM/LEDG2	G25, Warm White, 3000K, 510 Lumen, E26
	9.5W	LPAR20/5K/LEDG5	PAR20, 5000K, 500 Lumen
	9.5W	LPAR20/LEDG5	PAR20, 3000K, 450 Lumen
	9.5W	LPAR20DM/SP/LED	PAR20, 3000K, 465 Lumen, Spot
	10W	LG25/DM/LED	G25, 3000K
Westinghouse	13.5W	LA19/OM800/LED	A19, 3000K, 800 Lumen, Omni Directional
	8W	8A19/LED/DIM/30	A19, Warm White, 3000K
	8W	8A19/LED/DIM/50	A19, Cool White, 5000K

† Requires a minimum of 2 lamps
†† Requires a minimum of 3 lamps
© Lutron Electronics Co., Inc. | PN 368-3266J

Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated August 4, 2015
For the most up-to-date list, visit
www.lutron.com/dimcflled



CFL bulbs for Caséta[®] Wireless plug-in lamp dimmer

Caséta Wireless plug-in Lamp dimmer: PD-3PCL

Maximum wattage controlled: 100W



Brand	Wattage	Model	Description
GE	26W	FLE26HT3/2/DV/SW	Spiral

† Requires a minimum of 2 lamps
†† Requires a minimum of 3 lamps
© Lutron Electronics Co., Inc. | PN 368-3266J

Dimmable CFL & LED bulbs

Compatible with C•L® dimmers

List Updated August 4, 2015
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Caséta® Wireless In-wall Dimmer PRO

Caséta Wireless In-wall Dimmer PRO: PD-10NXD

Maximum wattage controlled: 250W



Brand	Wattage	Model	Description
Cree	9.5W	BA19-08027OMF-12DE26-2U100	A19, Soft White, 2700K, 800 Lumen, Medium base
	9.5W	BA19-08027OMF-12DE26-2U500	A19, 2700K, 800 Lumen, E26, 60WE, 4pk
	9.5W	CR4-575L	4" Downlight, 2700K, 575 Lumen, Medium Base
	9.5W	CR6-575L	6" Downlight, 2700K, Medium Base
	9.5W	CR6-575L-GU24	6" Downlight, 2700K, GU24 Base
	9.5W	H1CR6TW62527E04	6" Downlight, 2700K, 625 Lumen
	18W	BA21-16027OMF-12DE26-1U100	A21, 2700K, 1600 Lumen, E26, 18W
EcoSmart	18W	BA21-16050OMF-12DE26-1U100	A21, 5000K, 1600 Lumen, E26, 18W
	8W	ECS 19 CW 120	A19, Cool White, 5000K
	8W	ECS 19 WW 120	A19, Warm White, 3000K
	8W	ECS 20 CW FL 50WE 120	PAR20, 5000K, 490 Lumen
	8W	ECS 20 WW FL 50WE 120	PAR20, 3000K, 450 Lumen
	9.5W	ECO4-575L	4" Downlight, 2700K, 575 Lumen, Medium Base
	9.5W	ECO4-575L-50K	4" Downlight, 5000K, 575 Lumen, Medium Base
	9.5W	ECO4-575L-50K-GU24	4" Downlight, 5000K, GU24 Base
	9.5W	ECO-575L	6" Downlight, 2700K, Medium Base
	9.5W	ECO-575L-50K	6" Downlight, 5000K, Medium Base
	9.5W	ECO-575L-50K-GU24	6" Downlight, 5000K, GU24 Base
	9.5W	ECO-575L-GU24	6" Downlight, 2700K, GU24 Base
	10W	ECS BR30 65WE CW 120 DG	BR30, Daylight, 5000K, 700 Lumen, E26
	10W	ECS BR30 65WE CW 120 DG 3PK	BR30, Daylight, 5000K, 700 Lumen, E26, 3pk
	10W	ECS BR30 65WE W27 120 DG	BR30, Soft White, 2700K, 650 Lumen, E26
	10W	ECS BR30 65WE W27 120 DG 3BX	BR30, Soft White, 2700K, 650 Lumen, E26, 3pk
	10W	ECS BR30 65WE WW 120 DG	BR30, Warm White, 3000K, 650 Lumen, E26
	10.5W	ECS 30 75WE WW GB FL 120	PAR30 Gimbal, 3000K, 750 Lumen, E26, 75WE
	10.5W	ECS 30 75WE xxx GB xx 120	PAR30 Gimbal, Various color temperatures, 75WE
	11.5W	ECS BR30 65WE CW 120	BR30, 5000K, Medium Base
	11.5W	ECS BR30 65WE W27 120	BR30, 2700K, 650 Lumen, Medium Base
	14W	ECS BR40 90WE CW 120 DG	BR40, Daylight, 5000K, 1050 Lumen, E26
	14W	ECS BR40 90WE W27 120 DG	BR40, 2700K, 1000 Lumen, E26
15W	ECS BR30 W27 FL 120	BR30, Soft White, 2700K	
24W	ECS 38 V2 WW FL 120	PAR38, Warm White, 3000K	
Feit	4.5W	R14DM/LED	R14, Soft White, 2700K, 300 Lumen, E26, 40WE
	5W	MR16/GU10/DM/LED†	MR16, GU10 Base
	6.5W	BPMR16/GU10/DM/LED†	MR16, GU10 base
	6.5W	MR16/GU10/DM/LED†	MR16, GU10 base
	6.5W	R16DM/LED†	R16, Soft White, 2700K, 400 Lumen, E26, 40WE
	7.5W	PAR20DM/5K/LED†	PAR20, 5000K
	7.5W	PAR20DM/LED†	PAR20, 3000K
	8W	BPCER20/DM/LED	R20, 2700K, 450 Lumen, E26 Medium base (70 mA smooth reflector version)
	8W	R20/927/LED	R20, 2700K
	8W	R20/930/LED	R20, 3000K
	8W	R20/950/LED	R20, 5000K,
	8W	R20DM/LEDG2/CAN	R20, 2700K
	13W	BPCEBR30LED	BR30
	13.5W	A19/OM800/5K/LED	A19, 5000K, Omni Directional
	13.5W	A19/OM800/LED	A19, 3000K, Omni Directional
	13.5W	BPCEA19/OM800/LED	A19, Omni Directional
	13.5W	BPCEA19/OM800/LED/CAN	A19, Omni Directional
	17W	BR40/DM/LED†	BR40, 2700K, 1065 Lumen
	20.5W	LEDR56/827	5" or 6" Downlight, 2700K, 1245 Lumen
	GE	8W	LED8DA19/827
14W		LED14DA21V2/827W	A21, 2700K, 1100 Lumen, E26
Lighting Science	8W	DFN 19 CW 120	A19, Cool White, 5000K
	8W	DFN 19 NW 120	A19, Neutral White, 4000K

† Requires a minimum of 2 lamps

†† Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266J

Dimmable CFL & LED bulbs

Compatible with C•L® dimmers

List Updated August 4, 2015
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Caséta® Wireless In-wall Dimmer PRO

Caséta Wireless In-wall Dimmer PRO: PD-10NXD

Maximum wattage controlled: 250W



Brand	Wattage	Model	Description
Lighting Science	8W	DFN 19 W27 120	A19, Warm White, 2700K
	8W	DFN 19 WW 120	A19, Warm White, 3000K
	10.5W	LS 30 75WE xxx GB xx 120	PAR30, various color temperatures
	11.5W	DFN BR30 65WE CW 120	BR30, Cool White, 5000K, Medium base
	11.5W	DFN BR30 65WE NW 120	BR30, Neutral White, 4000K, Medium base
	11.5W	DFN BR30 65WE W27 120	BR30, Warm White, 2700K, Medium base
	11.5W	DFN BR30 65WE WW 120	BR30, Warm White, 3000K, Medium base
	13W	LS GLP6 W27 120 WH S1 BX	6" Downlight, 2700K, E26 retrofit
	15W	DFN BR30 CW FL 120	BR30, Cool White, 5000K
	15W	DFN BR30 NW FL 120	BR30, Neutral White, 4000K
	15W	DFN BR30 W27 FL 120	BR30, Warm White, 2700K
	15W	DFN BR30 WW FL 120	BR30, Warm White, 3000K
	24W	DFN 38 CW V2 FL 120	PAR38, Cool White, 5000K
	24W	DFN 38 CW V2 NFL 120	PAR38, Cool White, 5000K
	24W	DFN 38 NW V2 FL 120	PAR38, Neutral White, 4000K
	24W	DFN 38 NW V2 NFL 120	PAR38, Neutral White, 4000K
	24W	DFN 38 W27 V2 FL 120	PAR38, Warm White, 2700K
	24W	DFN 38 W27 V2 NFL 120	PAR38, Warm White, 2700K
	24W	DFN 38 WW V2 FL 120	PAR38, Warm White, 3000K
	24W	DFN 38 WW V2 NFL 120	PAR38, Warm White, 3000K
Lumapro	8W	8A19/LED/DIM/30	A19, Warm White, 3000K (6GEM2)
	8W	8A19/LED/DIM/50	A19, Cool White, 5000K (6GEM3)
Philips	4W	9290002120	X DO NOT RECOMMEND
	4.5W	9290002439	Candle, Warm White, 2700K, 320 Lumen, E26 base, Post Light
	4.5W	9290002797††	Candle, 2700K, 330 Lumen, E26, blunt tip
	4.5W	9290002889††	Candle, 2700K, 330 Lumen, E12, blunt tip
	4.5W	9290002890††	A15, 2700K, 330 Lumen, E12
	4.5W	9290002891††	A15, 2700K, 330 Lumen, E26
	6W	9290002242	MR16, 3000K, 300 Lumen, GU10 base
	7W	9290002706	A19 SlimStyle, Daylight, 5000K, 450 Lumen, E26
	8W	9290002267	A19, 2700K, 470 Lumen
	8W	9290002295	A19, 5000K, 470 Lumen
	8W	9290002329	PAR20, 3000K, 470 Lumen, E26
	8.5W	9290002543	BR30, 5000K, 730 Lumen, 8.5W
	9.5W	9290011117	BR30, 2700K, 730 Lumen, WarmGlow to 2200K (Nov 2014 or later)
	9.5W	9290011118 (452359)	BR30 SlimStyle, 2700K, 650 Lumen, E26, 65WE
	9.5W	9290011118 (452383)	BR30 SlimStyle, 2700K, 650 Lumen, E26, 65WE
	9.5W	9290011118 (452417)	BR30 SlimStyle, 2700K, 650 Lumen, E26, 65WE
	9.5W	9290011119 (452441)	BR30 SlimStyle, 5000K, 650 Lumen, E26, 65WE
	9.5W	9290011119 (452466)	BR30 SlimStyle, 5000K, 650 Lumen, E26, 65WE
	9.5W	9290011119 (452482)	BR30 SlimStyle, 5000K, 650 Lumen, E26, 65WE
	10.5W	9290002544	BR30, 2700K, 730 Lumen
	11W	9290002268	A19, 2700K, 830 Lumen
	11W	9290002296	A19, 5000K, 830 Lumen
	11W	9290011113	PAR30L, 3000K, ? Lumen, E26
	13W	9290002201	PAR30, 3000K, 750 Lumen
	13W	9290002233	PAR30, 2700K, 784 Lumen
	13W	9290002234	PAR30, 2700K, 770 Lumen
	13W	9290002323	PAR30, 5000K, 850 Lumen
	13W	9290002523 13PAR38/F25 3000 DIM AF RO	PAR38, 3000K, 950 Lumen
14.5W	9290002199	BR40, 2700K, 832 Lumen	
15W	9290002595	A21, Soft White, 2700K, 1180 Lumen, E26	
15W	9290011111	PAR38, 3000K, 1050 Lumen, E26, Flood	
15W	9290011112	PAR38, 5000K, 1050 Lumen, E26, Flood	
17W	9290002018†	A21, 2700K	

† Requires a minimum of 2 lamps

†† Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266J

Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated August 4, 2015
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Caséta[®] Wireless In-wall Dimmer PRO

Caséta Wireless In-wall Dimmer PRO: PD-10NXD

Maximum wattage controlled: 250W



Brand	Wattage	Model	Description	
Philips	17W	17E26A21D†	A21, 2700K	
	18W	9290002202	PAR38, 3000K, 951 Lumen, Medium Base	
	18W	9290002236	PAR38	
	18W	9290002237	PAR38	
	18W	9290002245	PAR38, 2700K, 938 Lumen	
	18W	9290002246	PAR38	
	18W	9290002307	PAR38	
	18W	9290002308	PAR38	
	18W	9290002309	PAR38	
	18W	9290002310	PAR38	
	18W	9290002311	PAR38	
	18W	18E26PAR38-3	PAR38	
	18W	18E26PAR38-4	PAR38	
	Samsung	7W	STIPLW8300711AB	SI-P8V071AB0US
Satco	11W	S9084	PAR30, 3000K, 780 Lumen, E26, short neck, 25° Beam	
	11W	S9085	PAR30, 4000K, 780 Lumen, E26, short neck, 25° Beam	
	11W	S9086	PAR30, 3000K, 780 Lumen, E26, short neck, 40° Beam	
	11W	S9087	PAR30, 4000K, 780 Lumen, E26, short neck, 40° Beam	
	11W	S9088	PAR30, 3000K, 780 Lumen, E26, long neck, 25° Beam	
	11W	S9089	PAR30, 4000K, 780 Lumen, E26, long neck, 25° Beam	
	11W	S9090	PAR30, 3000K, 780 Lumen, E26, long neck, 40° Beam	
	11W	S9091	PAR30, 4000K, 780 Lumen, E26, long neck, 40° Beam	
	17W	S9092	PAR38, 3000K, 1200 Lumen, E26, 25° beam	
	17W	S9093	PAR38, 4000K, 1200 Lumen, E26, 25° beam	
	17W	S9094	PAR38, 3000K, 1200 Lumen, E26, 40° beam	
	17W	S9095	PAR38, 4000K, 1200 Lumen, E26, 40° beam	
	Solais	7W	LRP20/25/27K	PAR20, 2700K, 475 Lumen, E26, 25° Beam
		7W	LRP20/25/30K	PAR20, 3000K, 500 Lumen, E26, 25° Beam
7W		LRP20/40/27K	PAR20, 2700K, 475 Lumen, E26, 40° Beam	
7W		LRP20/40/30K	PAR20, 3000K, 500 Lumen, E26, 40° Beam	
11W		LR20/25/27K/675/xx	PAR20, 2700K, 675 Lumen, E26, narrow flood	
11W		LR20/25/30K/750	PAR20, 3000K, 750 Lumen, E26, narrow flood	
11W		LR20/40/27K/675/xx	PAR20, 2700K, 675 Lumen, E26, wide flood	
11W		LR20/40/30K/750/xx	PAR20, 3000K, 750 Lumen, E26, wide flood	
16W		LR30/10/27K/1100/xx	PAR30, 2700K, 1100 Lumen, E26, short neck, 10° Beam	
16W		LR30/10/30K/1125/xx	PAR30, 3000K, 1125 Lumen, E26, short neck, 10° Beam	
16W		LR30/10/30K/1200/xx	PAR30, 3000K, 1200 Lumen, E26, short neck, 10° Beam	
16W		LR30/15/27K/1100/xx	PAR30, 2700K, 1100 Lumen, E26, short neck, 15° Beam	
16W		LR30/15/30K/1125/xx	PAR30, 3000K, 1125 Lumen, E26, short neck, 15° Beam	
16W		LR30/15/30K/1200/xx	PAR30, 3000K, 1200 Lumen, E26, short neck, 15° Beam	
16W		LR30/25/27K/1100/xx	PAR30, 2700K, 1100 Lumen, E26, short neck, 25° Beam	
16W		LR30/25/30K/1125/xx	PAR30, 3000K, 1125 Lumen, E26, short neck, 25° Beam	
16W		LR30/25/30K/1200/WH	PAR30, 3000K, 1200 Lumen, E26, short neck, 25° Beam	
16W		LR30/40/27K/1100/xx	PAR30, 2700K, 1100 Lumen, E26, short neck, 40° Beam	
16W		LR30/40/30K/1125/xx	PAR30, 3000K, 1125 Lumen, E26, short neck, 40° Beam	
16W		LR30/40/30K/1200/xx	PAR30, 3000K, 1200 Lumen, E26, short neck, 40° Beam	
16W		LRP38/25/27K	PAR38, 2700K, 1025 Lumen, E26, 25° Beam	
16W		LRP38/25/30K	PAR38, 3000K, 1100 Lumen, E26, 25° Beam	
16W		LRP38/40/27K	PAR38, 2700K, 1025 Lumen, E26, 40° Beam	
16W		LRP38/40/30K	PAR38, 3000K, 1100 Lumen, E26, 40° Beam	
20W		LR38/25/30K/1450/SL	PAR38, 3000K, 1450 Lumen, E26, 15° Beam	
28W		LR38/15/27K/2000/xx	PAR38, 2700K, 2000 Lumen, E26	
28W		LR38/15/30K/2100/xx	PAR38, 3000K, 2100 Lumen, E26	
28W		LR38/25/27K/2000/xx	PAR38, 2700K, 2000 Lumen, E26	
28W		LR38/25/30K/2100/xx	PAR38, 3000K, 2100 Lumen, E26	
28W		LR38/40/27K/2000/xx	PAR38, 2700K, 2000 Lumen, E26	
28W	LR38/40/30K/2100/xx	PAR38, 3000K, 2100 Lumen, E26		

† Requires a minimum of 2 lamps
† † Requires a minimum of 3 lamps
© Lutron Electronics Co., Inc. | PN 368-3266J

Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated August 4, 2015
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for Caséta[®] Wireless In-wall Dimmer PRO

Caséta Wireless In-wall Dimmer PRO: PD-10NXD

Maximum wattage controlled: 250W



Brand	Wattage	Model	Description
Sylvania	8W	LED8A/DIM/F/827	A19, 2700K
	8W	LED8A/DIM/F/830	A19, 3000K
	8W	LED8A19DIMO827RP	A19, 2700K, 470 Lumen, E26
	8W	LED8PAR16/DIM/930/FL36/P/LW	PAR16, Soft White, 390 Lumen
	8W	LED8PAR16/GU10/DIM/930/FL36/RP	PAR16, GU10, Soft White, 390 Lumen
	9W	LED/550/RT4/827/FL80/WRFL	4" Downlight, 2700K
	9W	LED/550/RT4/830/FL80/WRFL	4" Downlight, 3000K
	11W	LED11PAR20/DIM/930/FL30/P2	PAR20, Soft White, 550 Lumen
	12W	LED12BR30/DIM/HO/827	BR30, 2700K, Medium base
	12W	LED12BR30/DIM/HO/827/HVP	BR30, 2700K, Medium base
	17W	LED17PAR30LN/DIM/830/WSP15/P	PAR30, 3000K, 1200 Lumen, E26, spot
	17W	LED17PAR30LN/DIM/830/WSP20	PAR30, 3000K, 1200 Lumen, E26, wide spot
	17W	LED17PAR30LN/DIM/P/930/NFL25 [†]	PAR30, 3000K, 900 Lumen
	20W	LED20PAR38/DIM/930/FL40/P2	PAR38, 3000K, 1000 Lumen,
	21W	LED21/PAR38/DIM/P/930/FL30/HVP	PAR38, Warm White, 3000K, 1100 Lumen, E26, 21W
	21W	LED21PAR38/DIM/P/930/FL30	PAR38, 3000K, 1100 Lumen
	Utilitech	3W	LG161/2DM/IF/LED [†]
4.5W		LR14DMLED	R14, Soft White, 2700K, 300 Lumen, E26, 40WE
4.8W		LA15DM/CL/300/LED [†]	A15, Warm White, 3000K, 300 Lumen, E26, clear
4.8W		LA15DM/IF/300/LED [†]	A15, Warm White, 3000K, 300 Lumen, E26, frosted
4.8W		LA15DMC/CL/300/LED [†]	A15, Warm White, 3000K, 300 Lumen, E12 base, clear
4.8W		LCFCDM/300/LED [†]	Candle, Warm White, 3000K, 300 Lumen, E12 base, clear flame tip
4.8W		LCFFDM/300/LED [†]	Candle, Warm White, 3000K, 300 Lumen, E12 base, frosted flame tip
4.8W		LEFCDM/300/LED [†]	Candle, Warm White, 3000K, 300 Lumen, E26 base, clear flame tip
4.8W		LG161/2DM/CL/300/LED [†]	G16.5, Warm White, 3000K, 300 Lumen, E12 base, clear
4.8W		LG161/2DM/IF/300/LED [†]	G16.5, Warm White, 3000K, 300 Lumen, E12 base, frosted
4.8W		LGMDM/CL/300/LED [†]	G16.5, Warm White, 3000K, 300 Lumen, E26, clear
5W		LMR16GU10DM/LED [†]	MR16, GU10 Base
6.5W		LMR16/GU10/DM/LED [†]	MR16, GU10 base
6.5W		LMR16DMGU10 [†]	MR16, GU10 base
6.5W		LR16DMLED [†]	R16, Soft White, 2700K, 400 Lumen, E26, 40WE
7.5W		LPAR20DM/5K/LED [†]	PAR20, 5000K
7.5W		LPAR20DM/LED [†]	PAR20, 3000K
8W		LG25DM/LEDG2 [†]	G25, Warm White, 3000K, 510 Lumen, E26
8W		LR20DMLEDG2	R20, 2700K, 450 Lumen, E26 Medium base (70 mA smooth reflector version)
11W		DLS02-41127D1E-WF1	4" Downlight, Soft White, 2700K, 650 Lumen, E26 retrofit
13W	DLS02-61327D1E-WF1	5" or 6" Downlight, Soft White, 2700K, 800 Lumen, E26 retrofit	
13W	DLS02-61350D1E-WF1	5" or 6" Downlight, Daylight, 5000K, 800 Lumen, E26 retrofit	
13W	LBR30DM/LEDG2	BR30	
13.5W	LA19/OM800/LED	A19, 3000K, 800 Lumen, Omni Directional	
17W	BPCEBR40/DM/LED [†]	BR40	
17W	LBR40DM/LED [†]	BR40, 2700K, 1065 Lumen	
Westinghouse	8W	8A19/LED/DIM/30	A19, Warm White, 3000K
	8W	8A19/LED/DIM/50	A19, Cool White, 5000K

† Requires a minimum of 2 lamps
†† Requires a minimum of 3 lamps
© Lutron Electronics Co., Inc. | PN 368-3266J

Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers

List Updated August 4, 2015
 For the most up-to-date list, visit
www.lutron.com/dimcflled



CFL bulbs for Caséta[®] Wireless In-wall Dimmer PRO

Caséta Wireless In-wall Dimmer PRO: PD-10NXD

Maximum wattage controlled: 250W



Brand	Wattage	Model	Description
GE	26W	FLE26HT3/2/DV/SW	Spiral
	14W	4R2014TD	R20, TruDim, 2700K
TCP	14W	4R2014TD30K	R20, TruDim, 3000K
	14W	4R2014TD35K	R20, TruDim, 3500K
	14W	4R2014TD41K	R20, TruDim, 4100K
	14W	4R2014TD50K	R20, TruDim, 5000K
	14W	4R2014TD65K	R20, TruDim, 6500K

† Requires a minimum of 2 lamps
 †† Requires a minimum of 3 lamps
 © Lutron Electronics Co., Inc. | PN 368-3266J

Dimmable CFL & LED bulbs

Compatible with C•L® dimmers


List Updated August 4, 2015
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for 250W C•L dimmers

Diva C•L: DVCL-253P
Ariadni C•L: AYCL-253P

Maximum wattage controlled: 250W



Brand	Wattage	Model	Description
Commercial Electric	12.5W	CE-JB4-600L-27K (T47)	4" Downlight, 600 Lumen, Soft White, 2700K
	12.5W	CE-JB6-650L-27K (T67)	6" Downlight, 650 Lumen, Soft White, 2700K
	14.5W	CED6 WW 120 WH	6" Downlight, White
Cree	6W	BA19-04527OMF-12DE26-1U100	A19, Warm Soft White, 2700K, 450 Lumen, Medium base
	6W	BA19-04527OMF-12DE26-2U100	A19, Warm Soft White, 2700K, 450 Lumen, Medium base
	6W	BA19-04527OMF-12DE26-3U100	A19 4Flow, 2700K, 460 Lumen, E26
	6W	BA19-04550OMF-12DE26-2U500	A19, 5000K, 450 Lumen, 40WE, 4pk
	6W	BA19-04550OMF-12DE26-3U100	A19 4Flow, 5000K, 460 Lumen, E26
	9.5W	BA19-08027OMF-12DE26-2U100	A19, Soft White, 2700K, 800 Lumen, Medium base
	9.5W	BA19-08027OMF-12DE26-2U500	A19, 2700K, 800 Lumen, E26, 60WE, 4pk
	9.5W	BBR30-06527FLF-12DE26-1U100	BR30, 650 Lumen, Soft White, 2700K
	9.5W	BBR30-06550FLF-12DE26-1U100	BR30, Daylight, 5000K 650 Lumen, 9.5W
	9.5W	CR4-575L	4" Downlight, 2700K, 575 Lumen, Medium Base
	9.5W	CR6-575L	6" Downlight, 2700K, Medium Base
	9.5W	CR6-575L-GU24	6" Downlight, 2700K, GU24 Base
	9.5W	H1CR6TW62527E04	6" Downlight, 2700K, 625 Lumen
	18W	BA21-16027OMF-12DE26-1U100	A21, 2700K, 1600 Lumen, E26, 18W
	18W	BA21-16050OMF-12DE26-1U100	A21, 5000K, 1600 Lumen, E26, 18W
	18W	BPAR38-1503027T-12DE26-1U100	PAR38, 3000K, 1500 Lumen, 27 deg spot
	18W	BPAR38-1503047T-12DE26-1U100	PAR38, 3000K, 1500 Lumen, 47 deg flood
	EcoSmart	6W	ECS 25 40WE W27 120 DG [†]
6W		ECS GP19 WW 40WE 120	A19, 3000K
7W		ECS 25 60WE W27 120 DG [†]	G25, 2700K, E12
7.5W		BPA15/CL/500/LED/ESM	A15, Soft White, 2700K, 500 Lumen, E26
7.5W		BPA15C/CL500/LED/ESM	A15, Soft White, 2700K, 500 Lumen, E12
7.5W		BPCFC/500/LED/ESM	B10, Soft White, 2700K, 500 Lumen, E12
7.5W		BPEFC/500/LED/ESM	B10, Soft White, 2700K, 500 Lumen, E26
7.5W		BPGM/CL/500/LED/ESM	G16.5, Soft White, 2700K, 500 Lumen, E26
8W		ECS 19 CW 120	A19, Cool White, 5000K
8W		ECS 19 WW 120	A19, Warm White, 3000K
8W		ECS 20 CW FL 120	PAR20, Daylight, 5000K, 490 Lumen
8W		ECS 20 CW FL 50WE 120 [†]	PAR20, 5000K, 490 Lumen
8W		ECS 20 WW FL 120	PAR20, Warm White, 3000K
8W		ECS 20 WW FL 50WE 120 [†]	PAR20, 3000K, 450 Lumen
8W		ECS 25 WW 120	G25, Warm White, 3000K
8W		ECS A19 CW 40WE 120 [†]	A19, 5000K, 480 Lumen
8W		ECS A19 V1 CW 120	A19, Daylight, 5000K
8W		ECS A19 V1 WW 120	A19, Warm White, 3000K
8W		ECS A19 WW 40WE 120 [†]	A19, 3000K, 450 Lumen
8W		ECS BR20 50WE CW 120 DG [†]	BR20, Daylight, 5000K, 600 Lumen, E26
8W		ECS BR20 50WE W27 120 [†]	BR20, Soft White, 2700K
8W		ECS BR20 50WE WW 120 DG [†]	BR20, Warm White, 3000K, 550 Lumen, E26
9.5W		ECO4-575L	4" Downlight, 2700K, 575 Lumen, Medium Base
9.5W		ECO4-575L-50K	4" Downlight, 5000K, 575 Lumen, Medium Base
9.5W		ECO4-575L-50K-GU24	4" Downlight, 5000K, GU24 Base
9.5W		ECO-575L	6" Downlight, 2700K, Medium Base
9.5W		ECO-575L-50K	6" Downlight, 5000K, Medium Base
9.5W		ECO-575L-50K-GU24	6" Downlight, 5000K, GU24 Base
9.5W		ECO-575L-GU24	6" Downlight, 2700K, GU24 Base
9.5W		ECS DN4 CW E26 120	4" Downlight, Daylight, 5000K, 650 Lumen, E26, retrofit
9.5W		ECS DN4 CW GU24 120	4" Downlight, Daylight, 5000K, 650 Lumen, Gu24 base, retrofit
9.5W		ECS DN4 W27 E26 120	4" Downlight, Soft White, 2700K, 650 Lumen, E26 retrofit
9.5W	ECS DN4 W27 GU24 120	4" Downlight, Soft White, 2700K, 650 Lumen, GU24 base, retrofit	
9.5W	ECS DN6 CW GU24 120	6" Downlight, Daylight, 5000K, 650 Lumen, Gu24 base, retrofit	
9.5W	ECS DN6 W27 E26 120	6" Downlight, Soft White, 2700K, 650 Lumen, E26 retrofit	
9.5W	ECS DN6 W27 E26 120 2BX	6" Downlight, Soft White, 2700K, E26 retrofit, 2pk	

† Requires a minimum of 2 lamps
†† Requires a minimum of 3 lamps
© Lutron Electronics Co., Inc. | PN 368-3266J

Dimmable CFL & LED bulbs

Compatible with C•L® dimmers


List Updated August 4, 2015
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for 250W C•L dimmers

Diva C•L: DVCL-253P
Ariadni C•L: AYCL-253P

Maximum wattage controlled: 250W



Brand	Wattage	Model	Description
EcoSmart	9.5W	ECS DN6 W27 E26 120 BX V3	6" Downlight, Soft White, 2700K, 650 Lumen, E26 retrofit
	9.5W	ECS DN6 W27 GU24 120	6" Downlight, Soft White, 2700K, 650 Lumen, GU24 base, retrofit
	10W	ECS BR30 65WE CW 120 DG†	BR30, Daylight, 5000K, 700 Lumen, E26
	10W	ECS BR30 65WE CW 120 DG 3PK†	BR30, Daylight, 5000K, 700 Lumen, E26, 3pk
	10W	ECS BR30 65WE W27 120 DG†	BR30, Soft White, 2700K, 650 Lumen, E26
	10W	ECS BR30 65WE W27 120 DG 3BX†	BR30, Soft White, 2700K, 650 Lumen, E26, 3pk
	10W	ECS BR30 65WE WW 120 DG†	BR30, Warm White, 3000K, 650 Lumen, E26
	10.5W	ECS 30 75WE WW GB FL 120	PAR30 Gimbal, 3000K, 750 Lumen, E26, 75WE
	10.5W	ECS 30 75WE xxx GB xx 120	PAR30 Gimbal, Various color temperatures, 75WE
	11W	ECS RFK6 65WE W27 120 REC†	Downlight, Soft White, 2700K, 600 Lumen, E26
	13W	ECS A19 V2 CW 120	A19, Daylight, 5000K
	13W	ECS A19 V2 WW 120	A19, Warm White, 3000K
	15W	ECS 38 CW FL 90WE 120	PAR38, 5000K, 970 Lumen
	15W	ECS 38 WW FL 90WE 120	PAR38, 3000K, 900 Lumen
	15W	ECS BR30 75WE CW 120 G1 BL	BR30, Daylight, 5000K, 985 Lumen, E26
	15W	ECS BR30 75WE W27 120 G1 3PK	BR30, Soft White, 2700K, 940 Lumen, E26, 3pk
	15W	ECS BR30 75WE W27 120 G1 BL	BR30, Soft White, 2700K, 940 Lumen, E26
	15W	ECS BR30 W27 FL 120	BR30, Soft White, 2700K
	16W	ECS 38 90WE WW FL 120 TP	PAR38, Bright White, 3000K, 1000 Lumen, E26
	18W	ECS 38 CW FL 120	PAR38, Daylight, 5000K
18W	ECS 38 WW FL 120	PAR38, Warm White, 3000K	
Energetic	17.5W	ELY17D-2BRW-VB	BR40, 2700K, 1100 Lumen
	4.8W	CFCDM/300/LED†	Candle, 3000K, 310 Lumen, Candelabra Base
	4.8W	EFCDM/300/LED†	Candle, 3000K, 310 Lumen, Medium Base
	6.5W	R16DM/LED	R16, Soft White, 2700K, 400 Lumen, E26, 40WE
	7.5W	PAR20DM/5K/LED	PAR20, 5000K
	7.5W	PAR20DM/LED	PAR20, 3000K
	8W	A19/DM/GU24/LED	A19, 3000K, GU24 Base
	8W	A19/DM/LED	A19, 3000K
	8W	A19/DM/LED/CAN	A19
	8W	A19/DM/LED/RP/CAN	A19
	8W	A19DM/5K/LED	A19, 5000K
	8W	BPCEA19/DM/LED	A19
	8W	BPCER20/DM/LED	R20 (90mA ridged reflector version)
	8W	BPCER20/DM/LED	R20, 2700K, 450 Lumen, E26 Medium base (70 mA smooth reflector version)
	8W	R20/927/LED	R20, 2700K
	8W	R20/930/LED	R20, 3000K
	8W	R20/950/LED	R20, 5000K,
	8W	R20/DM/LED	R20, 2700K, 450 Lumen (90mA ridged reflector version)
	8W	R20DM/LED/CAN	R20 (90mA ridged reflector version)
	Feit	8W	R20DM/LEDG2/CAN
9.5W		BPCER20/DM/LED	PAR20
9.5W		PAR20/5K/LEDG5	PAR20, 5000K
9.5W		PAR20/5K/LEDG5/CAN	PAR20, 5000K
9.5W		PAR20/LEDG5	PAR20, 3000K, 450 Lumen
9.5W		PAR20/LEDG5/CAN	PAR20
10W		BPAG800/5K/LED	A19, 5000K
10W		BPAG800/LED	A19, 3000K, 800 Lumen
10W		G25/DM/LED	G25, 3000K
13W		BPCEBR30LED	BR30
13.5W		A19/OM800/5K/LED	A19, 5000K, Omni Directional
13.5W		A19/OM800/LED	A19, 3000K, Omni Directional
13.5W		A19DM/800/LED	A19, 3000K
13.5W		BPCEA19/OM800/LED	A19, Omni Directional

† Requires a minimum of 2 lamps
†† Requires a minimum of 3 lamps
© Lutron Electronics Co., Inc. | PN 368-3266J

Dimmable CFL & LED bulbs

Compatible with C•L® dimmers

List Updated August 4, 2015
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for 250W C•L dimmers

Diva C•L: DVCL-253P
Ariadni C•L: AYCL-253P

Maximum wattage controlled: 250W



Brand	Wattage	Model	Description
Feit	13.5W	BPCEA19/OM800/LED/CAN	A19, Omni Directional
	14W	LEDR56/830	Downlight, 3000K, 925 Lumen, retrofit kit
	15W	BPCEPAR30/LEDG5	PAR30
	15W	PAR30L/5K/LEDG5	PAR30, 5000K
	15W	PAR30L/5K/LEDG5/CAN	PAR30, 5000K
	15W	PAR30L/LEDG5	PAR30
	15W	PAR30L/LEDG5/CAN	PAR30
	16W	A19/OM1100R/LED	A19, 3000K, 1100 Lumen, Omni Directional
	16.8W	LEDR56/3K	5" or 6" Downlight, 3000K, 840 Lumen
	17W	BPCEBR40/LED	BR40, 2700K, 1065 Lumen
	18W	18PAR38/DM/LED	PAR38, 3000K
	18W	PAR38DM/5K/LED	PAR38, 5000K
	18W	PAR38DM/LED	PAR38, 3000K
	20W	20PAR38/LEDG5	PAR38
	20W	BPCEPAR38/LEDG5	PAR38
	20W	PAR38/5K/LEDG5	PAR38, 5000K
	20W	PAR38/5K/LEDG5/CAN	PAR38, 5000K
	20W	PAR38/LEDG5	PAR38
	20W	PAR38/LEDG5/CAN	PAR38
	20.5W	LEDR56/827	5" or 6" Downlight, 2700K, 1245 Lumen
	22W	A/OM1600R/27K/LED	A21, 2700K, 1600 Lumen
	22W	A/OM1600R/5K/LED	A21, Daylight, 5000K, 1600 Lumen
22W	A/OM1600R/LED	A21, Warm White, 3000K, 1600 Lumen	
GE	7W	LED7DP20B827/20	PAR20, 2700K, Flood, Black Base
	7W	LED7DP20B830/12	PAR20, 3000K, Spot, Black Base
	7W	LED7DP20B830/20	PAR20, 3000K, Flood, Black Base
	7W	LED7DP20S827/20	PAR20, 2700K, Flood, Silver Base
	7W	LED7DP20S830/20	PAR20, 3000K, Flood, Silver Base
	7W	LED7DP20W827/20	PAR20, 2700K, Flood, White Base
	7W	LED7DP20W830/12	PAR20, 3000K, Spot, White Base
	7W	LED7DP20W830/20	PAR20, 3000K, Flood, White Base
	8W	LED8DA19/827	A19, 2700K, 450 Lumen, E26
	10W	LED10DP30S827/20	PAR30, 2700K, Short Neck, Silver Base
	10W	LED10DP30S830/20	PAR30, 3000K, Short Neck, Silver Base
	10W	LED10DP30W827/20	PAR30, 2700K, Short Neck, White Base
	10W	LED10DP3LS827/20	PAR30, 2700K, Long Neck, Silver Base
	10W	LED10DP3LS830/20	PAR30, 3000K, Long Neck, Silver Base
	11W	LED11DA19RVL/TP†	A19, 2700K, 570 Lumen
	11W	LED11DA19V2†	A19, 2700K, 800 Lumen
	12W	LED12DR30RVL/BK	BR30, Reveal
	12W	LED12DR30RVL/CDN	BR30, Reveal
	12W	LED12DR30RVL/TP	BR30, Reveal 2850K, 630 Lumen
	18W	LED18D38W827/15	PAR38, 2700K, E26, 15° Beam
	18W	LED18D38W827/25	PAR38, 2700K, E26, 25° Beam
	18W	LED18D38W827/40	PAR38, 2700K, E26, 40° Beam
	18W	LED18D38W830/15	PAR38, 3000K, 1400 Lumen, E26, 15° Beam
	18W	LED18D38W830/25	PAR38, 3000K, 1400 Lumen, E26, 25° Beam
18W	LED18D38W830/40	PAR38, 3000K, 1400 Lumen, E26, 40° Beam	
18W	LED18D38W927/15	PAR38, 2700K, 1100 Lumen, E26, 15° Beam	
18W	LED18D38W927/25	PAR38, 2700K, 1100 Lumen, E26, 25° Beam	
18W	LED18D38W927/40	PAR38, 2700K, 1100 Lumen, E26, 40° Beam	
18W	LED18D38W930/15	PAR38, 3000K, 1200 Lumen, E26, 15° Beam	
18W	LED18D38W930/25	PAR38, 3000K, 1200 Lumen, E26, 25° Beam	
18W	LED18D38W930/40	PAR38, 3000K, 1200 Lumen, E26, 40° Beam	
Halco	18W	PAR38/18NW/FL/LED†	PAR38, 5000K
	18W	PAR38/18WW/FL/LED†	PAR38, 2700K
	20W	PAR38FL20/827/LED	PAR38, 2700K, 1150 Lumen Flood

† Requires a minimum of 2 lamps
†† Requires a minimum of 3 lamps
© Lutron Electronics Co., Inc. | PN 368-3266J

Dimmable CFL & LED bulbs

Compatible with C•L® dimmers

List Updated August 4, 2015
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for 250W C•L dimmers

Diva C•L: DVCL-253P
Ariadni C•L: AYCL-253P

Maximum wattage controlled: 250W



Brand	Wattage	Model	Description
Halco	20W	PAR38FL20/830/LED	PAR38, 3000K, 1200 Lumen Flood
	20W	PAR38FL20/840/LED	PAR38, 4000K, 1250 Lumen Flood
	20W	PAR38FL20/850/LED	PAR38, 5000K, 1300 Lumen Flood
	20W	PAR38NFL20/827/LED	PAR38, 2700K, 1150 Lumen Flood
	20W	PAR38NFL20/830/LED	PAR38, 3000K, 1200 Lumen Flood
	20W	PAR38NFL20/840/LED	PAR38, 4000K Flood
	20W	PAR38NFL20/850/LED	PAR38, 5000K, 1300 Lumen Flood
	20W	PAR38SP20/827/LED	PAR38, 2700K, 1150 Lumen Spot
	20W	PAR38SP20/830/LED	PAR38, 3000K, 1200 Lumen Spot
	20W	PAR38SP20/840/LED	PAR38, 4000K Spot
	20W	PAR38SP20/850/LED	PAR38, 5000K, 1300 Lumen Spot
	Lighting Science	8W	DFN 19 CW 120
8W		DFN 19 NW 120	A19, Neutral White, 4000K
8W		DFN 19 W27 120	A19, Warm White, 2700K
8W		DFN 19 WW 120	A19, Warm White, 3000K
8W		DFN 20 CW FL 120	PAR20, Cool White, 5000K
8W		DFN 20 CW NFL 120	PAR20, Cool White, 5000K
8W		DFN 20 NW FL 120	PAR20, Neutral White, 4000K
8W		DFN 20 NW NFL 120	PAR20, Neutral White, 4000K
8W		DFN 20 W27 FL 120	PAR20, Warm White, 2700K
8W		DFN 20 W27 NFL 120	PAR20, Warm White, 2700K
8W		DFN 20 WW FL 120	PAR20, Warm White, 3000K
8W		DFN 20 WW NFL 120	PAR20, Warm White, 3000K
8W		DFN 25 CW 120	G25, Cool White, 5000K
8W		DFN 25 NW 120	G25, Neutral White, 4000K
8W		DFN 25 W27 120	G25, Warm White, 2700K
8W		DFN 25 WW 120	G25, Warm White, 3000K
8W		DFN A19 V1 CW 120	A19, Cool White, 5000K
8W		DFN A19 V1 NW 120	A19, Neutral White, 4000K
8W		DFN A19 V1 W27 120	A19, Warm White, 2700K
8W		DFN A19 V1 WW 120	A19, Warm White, 3000K
10.5W		LS 30 75WE xxx GB xx 120	PAR30, various color temperatures
13W		LS GLP6 W27 120 WH S1 BX	6" Downlight, 2700K, E26 retrofit
13.5W		DFN A19 V2 CW 120	A19, Cool White, 5000K
13.5W		DFN A19 V2 NW 120	A19, Neutral White, 4000K
13.5W		DFN A19 V2 W27 120	A19, Warm White, 2700K
13.5W		DFN A19 V2 WW 120	A19, Warm White, 3000K
14.5W		GLP6 NW WH	6" Downlight, White, 4000K
14.5W		GLP6 W27 WH	6" Downlight, White, 2700K
14.5W		GLP6 WW WH	6" Downlight, Warm White, 3000K
15W		DFN BR30 CW FL 120	BR30, Cool White, 5000K
15W	DFN BR30 NW FL 120	BR30, Neutral White, 4000K	
15W	DFN BR30 W27 FL 120	BR30, Warm White, 2700K	
15W	DFN BR30 WW FL 120	BR30, Warm White, 3000K	
18W	DFN 38 CW FL 120	PAR38, Cool White, 5000K	
18W	DFN 38 CW NFL 120	PAR38, Cool White, 5000K	
18W	DFN 38 NW FL 120	PAR38, Neutral White, 4000K	
18W	DFN 38 NW NFL 120	PAR38, Neutral White, 4000K	
18W	DFN 38 W27 FL 120	PAR38, Warm White, 2700K	
18W	DFN 38 W27 NFL 120	PAR38, Warm White, 2700K	
18W	DFN 38 WW FL 120	PAR38, Warm White, 3000K	
18W	DFN 38 WW NFL 120	PAR38, Warm White, 3000K	
Litetronics	14W	LP14550FL2D	BR30, 2700K, 925 Lumen
	14W	LP14550FL4D	BR30, 3000K, 925 Lumen
	14W	LP14550FL6D	BR30, 4000K, 925 Lumen
Lumapro	8W	8A19/LED/DIM/30	A19, Warm White, 3000K (6GEM2)
	8W	8A19/LED/DIM/50	A19, Cool White, 5000K (6GEM3)
	8W	8PAR20/LED/DIM30/NFL	PAR20, Warm White, 3000K (6GEM4)

† Requires a minimum of 2 lamps
†† Requires a minimum of 3 lamps
© Lutron Electronics Co., Inc. | PN 368-3266J

Dimmable CFL & LED bulbs

Compatible with C•L® dimmers

List Updated August 4, 2015
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for 250W C•L dimmers

Diva C•L: DVCL-253P
Ariadni C•L: AYCL-253P

Maximum wattage controlled: 250W



Brand	Wattage	Model	Description
Lumapro	8W	8PAR20/LED/DIM50/NFL	PAR20, Cool White, 5000K (6GEM5)
Luminus	18W	TP120-RT5/6-DIM-E	Retrofit downlight, 3000K, 1100 Lumen
Philips	6.5W	9290011347 (455741)	A19, Warm Glow, 450 Lumen
	7W	9290002706	A19 SlimStyle, Daylight, 5000K, 450 Lumen, E26
	8W	9290002267	A19, 2700K, 470 Lumen
	8W	9290002295	A19, 5000K, 470 Lumen
	8W	9290002329	PAR20, 3000K, 470 Lumen, E26
	8W	9290002330	PAR20
	8W	9290002331	PAR20
	8W	9290002332	PAR20
	8W	9290002333	PAR20
	8W	9290002334	PAR20
	8W	9290002335	PAR20
	8W	9290002704	A19 SlimStyle, 2700K, 450 Lumen, E26, 40WE
	8.5W	9290002543	BR30, 5000K, 730 Lumen, 8.5W
	8.5W	9290011116	BR30, 5000K, 730 Lumen, E26
	9W	9290011346	A19, Daylight, 5000K, 800 Lumen, E26
	9.5W	9290011117	BR30, 2700K, 730 Lumen, WarmGlow to 2200K (Nov 2014 or later)
	9.5W	9290011345	A19, Soft White, 2200-2700K, 800 Lumen, E26
	9.5W	9290011118 (452359)	BR30 SlimStyle, 2700K, 650 Lumen, E26, 65WE
	9.5W	9290011118 (452383)	BR30 SlimStyle, 2700K, 650 Lumen, E26, 65WE
	9.5W	9290011118 (452417)	BR30 SlimStyle, 2700K, 650 Lumen, E26, 65WE
	9.5W	9290011119 (452441)	BR30 SlimStyle, 5000K, 650 Lumen, E26, 65WE
	9.5W	9290011119 (452466)	BR30 SlimStyle, 5000K, 650 Lumen, E26, 65WE
	9.5W	9290011119 (452482)	BR30 SlimStyle, 5000K, 650 Lumen, E26, 65WE
	10.5W	9290002544	BR30, 2700K, 730 Lumen
	10.5W	9290002707	A19 SlimStyle, Soft White, 2700K, 800 Lumen, 3pk
	11W	9290002268	A19, 2700K, 830 Lumen
	11W	9290002296	A19, 5000K, 830 Lumen
	11W	9290011113	PAR30L, 3000K, ? Lumen, E26
	12W	9290002580 (431392)	BR40, 2700K, 800 Lumen
	12.5W	9290001829	A19, 2700K, 908 Lumen
	12.5W	12E26A60	A19, 2700K
	13W	9290002197	BR30, 2700K, 721 Lumen
	13W	9290011120	A21 SlimStyle, 2700K, 1100 Lumen
	13W	13E26B30DAAABAA	BR30, 3000K
	13W	9290002523 13PAR38/F25 3000 DIM AF RO	PAR38, 3000K, 950 Lumen
	14.5W	9290002199	BR40, 2700K, 832 Lumen
	15W	9290002426	A21, 2700K, 1180 Lumen
	15W	9290002595	A21, Soft White, 2700K, 1180 Lumen, E26
	15W	9290011111	PAR38, 3000K, 1050 Lumen, E26, Flood
	15W	9290011112	PAR38, 5000K, 1050 Lumen, E26, Flood
	17W	9290002018	A21, 2700K
	17W	17E26A21D	A21, 2700K
	18W	18E26PAR38D-2	PAR38, 2700K
	19W	9290002473	PAR38, 3000K, 1250 Lumen
	19.5W	9290002251	PAR38, 3000K, 1210 Lumen
	19.5W	9290002252	PAR38, 2700K, 1183 Lumen
	19.5W	9290002253	PAR38, 3000K, 1212 Lumen
	19.5W	9290002291	PAR38, 4000K, 1207 Lumen
	19.5W	9290002312	PAR38, 2700K, 1100 Lumen
	19.5W	9290002313	PAR38, 2700K, 1196 Lumen
19.5W	9290002314	PAR38, 3000K, 1200 Lumen	
19.5W	9290002315	PAR38, 3000K, 1225 Lumen	
19.5W	9290002316	PAR38, 4000K, 1200 Lumen	
19.5W	9290002317	PAR38, 4000K, 1245 Lumen	
19.5W	9290002321	PAR38, 2700K, 1172 Lumen	

† Requires a minimum of 2 lamps

†† Requires a minimum of 3 lamps

© Lutron Electronics Co., Inc. | PN 368-3266J



Dimmable CFL & LED bulbs

Compatible with C•L® dimmers

List Updated August 4, 2015
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for 250W C•L dimmers

Diva C•L: DVCL-253P
Ariadni C•L: AYCL-253P

Maximum wattage controlled: 250W



Brand	Wattage	Model	Description
Philips	19.5W	9290002322	PAR38, 5000K, 1300 Lumen
	22W	9290002290	A21, 2700K, 1780 Lumen, Medium base
Satco	7W	S8827 thru S8838	PAR30
	10.5W	S9037	A19, 2700K, 810 Lumen, E26
	10.5W	S9038	A19, 3500K, 830 Lumen, E26
	10.5W	S9039	A19, 5000K, 870 Lumen, E26
	11W	S9084	PAR30, 3000K, 780 Lumen, E26, short neck, 25° Beam
	11W	S9085	PAR30, 4000K, 780 Lumen, E26, short neck, 25° Beam
	11W	S9086	PAR30, 3000K, 780 Lumen, E26, short neck, 40° Beam
	11W	S9087	PAR30, 4000K, 780 Lumen, E26, short neck, 40° Beam
	11W	S9088	PAR30, 3000K, 780 Lumen, E26, long neck, 25° Beam
	11W	S9089	PAR30, 4000K, 780 Lumen, E26, long neck, 25° Beam
	11W	S9090	PAR30, 3000K, 780 Lumen, E26, long neck, 40° Beam
	11W	S9091	PAR30, 4000K, 780 Lumen, E26, long neck, 40° Beam
	13W	S8959 thru S8963	PAR30
	14W	S8814 thru S8819	PAR30
	14W	S8821 thru S8826	PAR30
	17W	S8852 thru S8859	PAR38
	17W	S8861 thru S8864	PAR38
	17W	S8977-S8979	PAR38
	17W	S8984-S8986	PAR38
	17W	S9092	PAR38, 3000K, 1200 Lumen, E26, 25° beam
17W	S9093	PAR38, 4000K, 1200 Lumen, E26, 25° beam	
17W	S9094	PAR38, 3000K, 1200 Lumen, E26, 40° beam	
17W	S9095	PAR38, 4000K, 1200 Lumen, E26, 40° beam	
Solais	7W	LRP20/25/27K	PAR20, 2700K, 475 Lumen, E26, 25° Beam
	7W	LRP20/25/30K	PAR20, 3000K, 500 Lumen, E26, 25° Beam
	7W	LRP20/40/27K	PAR20, 2700K, 475 Lumen, E26, 40° Beam
	7W	LRP20/40/30K	PAR20, 3000K, 500 Lumen, E26, 40° Beam
	11W	LR20/25/27K/675/xx	PAR20, 2700K, 675 Lumen, E26, narrow flood
	11W	LR20/25/30K/750	PAR20, 3000K, 750 Lumen, E26, narrow flood
	11W	LR20/40/27K/675/xx	PAR20, 2700K, 675 Lumen, E26, wide flood
	11W	LR20/40/30K/750/xx	PAR20, 3000K, 750 Lumen, E26, wide flood
	16W	LR30/10/27K/1100/xx	PAR30, 2700K, 1100 Lumen, E26, short neck, 10° Beam
	16W	LR30/10/30K/1125/xx	PAR30, 3000K, 1125 Lumen, E26, short neck, 10° Beam
	16W	LR30/10/30K/1200/xx	PAR30, 3000K, 1200 Lumen, E26, short neck, 10° Beam
	16W	LR30/15/27K/1100/xx	PAR30, 2700K, 1100 Lumen, E26, short neck, 15° Beam
	16W	LR30/15/30K/1125/xx	PAR30, 3000K, 1125 Lumen, E26, short neck, 15° Beam
	16W	LR30/15/30K/1200/xx	PAR30, 3000K, 1200 Lumen, E26, short neck, 15° Beam
	16W	LR30/25/27K/1100/xx	PAR30, 2700K, 1100 Lumen, E26, short neck, 25° Beam
	16W	LR30/25/30K/1125/xx	PAR30, 3000K, 1125 Lumen, E26, short neck, 25° Beam
	16W	LR30/25/30K/1200/WH	PAR30, 3000K, 1200 Lumen, E26, short neck, 25° Beam
	16W	LR30/40/27K/1100/xx	PAR30, 2700K, 1100 Lumen, E26, short neck, 40° Beam
	16W	LR30/40/30K/1125/xx	PAR30, 3000K, 1125 Lumen, E26, short neck, 40° Beam
	16W	LR30/40/30K/1200/xx	PAR30, 3000K, 1200 Lumen, E26, short neck, 40° Beam
	16W	LRP38/25/27K	PAR38, 2700K, 1025 Lumen, E26, 25° Beam
	16W	LRP38/25/30K	PAR38, 3000K, 1100 Lumen, E26, 25° Beam
	16W	LRP38/40/27K	PAR38, 2700K, 1025 Lumen, E26, 40° Beam
	16W	LRP38/40/30K	PAR38, 3000K, 1100 Lumen, E26, 40° Beam
	20W	LR38/25/30K/1450/SL	PAR38, 3000K, 1450 Lumen, E26, 15° Beam
	28W	LR38/15/27K/2000/xx	PAR38, 2700K, 2000 Lumen, E26
	28W	LR38/15/30K/2100/xx	PAR38, 3000K, 2100 Lumen, E26
	28W	LR38/25/27K/2000/xx	PAR38, 2700K, 2000 Lumen, E26
28W	LR38/25/30K/2100/xx	PAR38, 3000K, 2100 Lumen, E26	
28W	LR38/40/27K/2000/xx	PAR38, 2700K, 2000 Lumen, E26	
28W	LR38/40/30K/2100/xx	PAR38, 3000K, 2100 Lumen, E26	
Switch	10W	A260FUS27B1	A19, 800 Lumen
Sylvania	6W	79643	A19, Soft White, 2700K, 450 Lumen, E26, clear

† Requires a minimum of 2 lamps
†† Requires a minimum of 3 lamps
© Lutron Electronics Co., Inc. | PN 368-3266J

Dimmable CFL & LED bulbs

Compatible with C•L® dimmers

List Updated August 4, 2015
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for 250W C•L dimmers

Diva C•L: DVCL-253P
Ariadni C•L: AYCL-253P

Maximum wattage controlled: 250W



Brand	Wattage	Model	Description	
Sylvania	7W	79120	PAR20, 2700K, 500 Lumen, E26	
	7W	LED7A19/DIM/O/SE/830 (78214)	A19, 3000K to 2000K, 450 Lumen, E26, Sunset Effect	
	7W	LED7A19/DIM/O/SE/830/RP (78213)	A19, 3000K to 2000K, 450 Lumen, E26, Sunset Effect	
	8W	LED8A/DIM/F/827	A19, 2700K	
	8W	LED8A/DIM/F/830	A19, 3000K	
	8W	LED8A19DIMO827RP	A19, 2700K, 470 Lumen, E26	
	8W	LED8G25/DIM/F/827	G25, 2700K	
	8W	LED8G25/DIM/F/830	G25, 3000K	
	8W	LED8PAR16/DIM/930/FL36/P/LW	PAR16, Soft White, 390 Lumen	
	8W	LED8PAR16/GU10/DIM/930/FL36/RP	PAR16, GU10, Soft White, 390 Lumen	
	8W	LED8R20/DIM/SE/830/RP	R20, Soft White, 2700K to 2000K, 520 Lumen	
	10W	LED/600/RT4/830/FL80/RP	Recessed lighting kit, 3000K, 600 Lumen	
	10W	LED/RT4/600/827/FL80	Recessed lighting kit, 2700K, 600 Lumen	
	10W	LED/RT6/700/830/SE/1PK (73195-0)	6" Downlight, 3000K, 700 Lumen, E26, Retro-fit	
	10W	LED10A19/DIM/O/SE/830	A19, 3000K, 800 Lumen	
	10W	LED10A19/DIM/O/SE/830/RP (78215)	A19, 3000K, 800 Lumen	
	10.5W	LED10A19/DIM/CL/O/827 (79146)	A19, 2700K, 800 Lumen, E26, 60WE	
	10.5W	LED10A19/DIM/CL/O/827/BL (79147)	A19, 2700K, 800 Lumen, E26, 60WE	
	10.5W	LED10A19/DIM/CL/O/827/G4 (79142)	A19, 2700K, 800 Lumen, E26, 60WE	
	10.5W	LED10A19/DIM/CL/O/827/G4/BL (79143)	A19, 2700K, 800 Lumen, E26, 60WE	
	10.5W	LED10A19/DIM/CL/O/827/RP (79644)	A19, 2700K, 800 Lumen, E26, 60WE	
	10.5W	LED10A19/DIM/CL/O/850/G4 (79144)	A19, 5000K, 800 Lumen, E26, 60WE	
	10.5W	LED10A19/DIM/CL/O/850/G4/BL (79145)	A19, 5000K, 800 Lumen, E26, 60WE	
	11W	LED11BR30/DIM/HO/827/G3 (78413)	BR30, 2700K, 800 Lumen, E26	
	11W	LED11BR30/DIM/HO/827/G3/RP (78415)	BR30, 2700K, 800 Lumen, E26	
	11W	LED11BR30/DIM/HO/827/G3/RP (79121)	BR30, 2700K, 800 Lumen, E26	
	12W	LED12BR30/DIM/HO/827	BR30, 2700K, Medium base	
	12W	LED12BR30/DIM/HO/827/HVP	BR30, 2700K, Medium base	
	12W	LED12BR30/DIM/SE/830/RP	BR30, Soft White, 2700K to 2000K, 850 Lumen	
	15W	LED15BR40/DIM/HO/827/G3/RP	BR40, Soft White, 2700K, 1100 Lumen, E26, Flood	
	16W	LED16BR40DIMHO827	BR40, 2700K, 1100Lumen	
	17W	LED17PAR30LN/DIM/830/WSP15/P	PAR30, 3000K, 1200 Lumen, E26, spot	
	17W	LED17PAR30LN/DIM/830/WSP20	PAR30, 3000K, 1200 Lumen, E26, wide spot	
	20W	LED20PAR38/DIM/930/FL40/P2	PAR38, 3000K, 1000 Lumen,	
	20W	LED20PAR38DIM830FL40	PAR38, 3000K, 1300 Lumen	
	21W	LED21/PAR38/DIM/P/930/FL30/HVP	PAR38, Warm White, 3000K, 1100 Lumen, E26, 21W	
	TCP	11W	LED11E26BR3027K	BR30, 2700K
		14W	LED14E26BR3027K	BR30, 2700K
		17W	LED17E26P3827KFL	PAR38, 2700K
		17W	LED17E26P3827KNFL	PAR38, 2700K
17W		LED17E26P3830KFL	PAR38, 3000K	
17W		LED17E26P3830KFLBT	PAR38	
17W		LED17E26P3830KFLWT	PAR38	

† Requires a minimum of 2 lamps
†† Requires a minimum of 3 lamps
© Lutron Electronics Co., Inc. | PN 368-3266J

Dimmable CFL & LED bulbs

Compatible with C•L® dimmers

List Updated August 4, 2015
For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for 250W C•L dimmers

Diva C•L: DVCL-253P
Ariadni C•L: AYCL-253P

Maximum wattage controlled: 250W



Brand	Wattage	Model	Description
TCP	17W	LED17E26P3830KNFL	PAR38, 3000K
	17W	LED17E26P3830KNFLBT	PAR38
	17W	LED17E26P3830KNFLWT	PAR38
	17W	LED17E26P3841KFL	PAR38, 4100K
	17W	LED17E26P3841KNFL	PAR38, 4100K
	17W	LED17E26P3850KFL	PAR38, 5000K
	17W	LED17E26P3850KNFL	PAR38, 5000K
Toshiba	13W	LDRB1327WE6USD2 (13BR40/27K-T)	BR40, 2700K, 950 Lumen
	13W	LDRB1340WE6USD2 (13BR40/40L-T)	BR40, 4000K, 1050 Lumen
Utilitech	6.5W	LR16DMLED	R16, Soft White, 2700K, 400 Lumen, E26, 40WE
	7.5W	LA19DM/GU24/LED	A19, 3000K, GU24
	7.5W	LA19DM/LED	A19, 3000K, 450 Lumen, E26
	7.5W	LPAR20DM/5K/LED	PAR20, 5000K
	7.5W	LPAR20DM/LED	PAR20, 3000K
	8W	LA19DM/5K/LED	A19, 5000K
	8W	LG25DM/LEDG2†	G25, Warm White, 3000K, 510 Lumen, E26
	8W	LR20DM/LED	R20, 2700K, 450 Lumen (90mA ridged reflector version)
	8W	LR20DMLEDG2	R20, 2700K, 450 Lumen, E26 Medium base (70 mA smooth reflector version)
	9W	LR20HO/LED/G2	R20, Soft White, 650 Lumen, E26, flood
	9W	R20HO/LED/G2	R20, Soft White, 650 Lumen, E26, flood
	9.5W	LPAR20/5K/LEDG5	PAR20, 5000K, 500 Lumen
	9.5W	LPAR20/LEDG5	PAR20, 3000K, 450 Lumen
	9.5W	LPAR20DM/SP/LED	PAR20, 3000K, 465 Lumen, Spot
	9.8W	LA19DM/800/LED/G2	A19, 3000K, 800 Lumen
	10W	LA19DM/800/5K/LEDG2	A19, 5000K
	10W	LA19DM/800/LEDG2	A19, 3000K, 800 Lumen
	10W	LG25/DM/LED	G25, 3000K
	11W	DLS02-06A27D1E-WH-F2	5" or 6" Downlight, 2700K, 700 Lumen, E26 retrofit 2pk
	11W	DLS02-41127D1E-WF1	4" Downlight, Soft White, 2700K, 650 Lumen, E26 retrofit
	12W	LPAR30L/LEDG7/2	PAR30L, 3000K, 800 Lumen, E26, long neck, 2PK
	13W	DLS02-06A50D1E-WH-F1	5" or 6" Downlight, 5000K, 700 Lumen, E26 retrofit
	13W	DLS02-61327D1E-WF1	5" or 6" Downlight, Soft White, 2700K, 800 Lumen, E26 retrofit
	13W	DLS02-61350D1E-WF1	5" or 6" Downlight, Daylight, 5000K, 800 Lumen, E26 retrofit
	13W	LBR30DM/LEDG2	BR30
	13.5W	LA19/OM800/LED	A19, 3000K, 800 Lumen, Omni Directional
	13.5W	LA19DM/800/LED	A19, 3000K
	15W	LBR30HO/LED/G2	BR30, Soft White, 1150 Lumen
	15W	LPAR30L/5K/LEDG5	PAR30, 5000K, 800 Lumen, long neck flood
15W	LPAR30L/LEDG5	PAR30, 3000K, 790 Lumen, long neck flood	
15W	LPAR30LDM/SP/LED	PAR30, 3000K, 790 Lumen, long neck, spot	
15W	LPAR30S/LEDG5	PAR30, 3000K, 750 Lumen, short neck flood	
16W	LA19/OM1100R/LED	A19, 3000K, 1100 Lumen, Omni Directional	
16W	LBR40DMLEDG2	BR40, 2700K, 1065 Lumen	
17.5W	YGA08A35-17.5W-827	BR40, 2700K, 1100 Lumen	
18W	LPAR38DM/5K/LED	PAR38, 5000K	
18W	LPAR38DM/LED	PAR38, 3000K	
20W	L20PAR38/LEDG5	PAR38, 3000K, 1000 Lumen, flood	
20W	LBR40HO/LED/G2	BR40, Soft White, 1400 Lumen	
20W	LPAR38/5K/LEDG5	PAR38, 5000K, 1000 Lumen, flood	
20W	LPAR38/LEDG5	PAR38, 3000K, 1000 Lumen, flood	
20W	LPAR38DM/SP/LED	PAR38, 3000K, 1000 Lumen, Spot	
20.5W	LPAR381400LEDG72	PAR38, 1450 Lumen, 2PK	
22W	LA/OM1600R/5K/LED	A21, Daylight, 5000K, 1600 Lumen	
22W	LA/OM1600R/LED	A21, Warm White, 3000K, 1600 Lumen	
23W	LPAR38/1400/5K/LEDG5	PAR38, 5000K, 1400 Lumen	

† Requires a minimum of 2 lamps
†† Requires a minimum of 3 lamps
© Lutron Electronics Co., Inc. | PN 368-3266J

Dimmable CFL & LED bulbs

Compatible with C•L® dimmers


List Updated August 4, 2015
 For the most up-to-date list, visit
www.lutron.com/dimcflled



LED bulbs for 250W C•L dimmers

Diva C•L: DVCL-253P
 Ariadni C•L: AYCL-253P

Maximum wattage controlled: 250W



Brand	Wattage	Model	Description
Utilitech	23W	LPAR38/1400/LEDG5	PAR38, 3000K, 1400 Lumen
	8W	8A19/LED/DIM/30	A19, Warm White, 3000K
Westinghouse	8W	8A19/LED/DIM/50	A19, Cool White, 5000K
	8W	8PAR20/LED/DIM30/NFL	PAR20, Warm White, 3000K
	8W	8PAR20/LED/DIM50/NFL	PAR20, Warm White, 5000K

† Requires a minimum of 2 lamps
 †† Requires a minimum of 3 lamps
 © Lutron Electronics Co., Inc. | PN 368-3266J

Dimmable CFL & LED bulbs

Compatible with C•L[®] dimmers


List Updated August 4, 2015
For the most up-to-date list, visit
www.lutron.com/dimcflled



CFL bulbs for 250W C•L dimmers

Diva C•L: DVCL-253P
Ariadni C•L: AYCL-253P

Maximum wattage controlled: 250W




Brand	Wattage	Model	Description
EcoSmart	5W	8TC05	Candle, (ES5CCDF052, ES9CCDF052)
	5W	8TC05F	Candle, Torpedo Tip, 2700K, 200 Lumen
	5W	8TFC05F	Candle, Flame Tip, 2700K, 200 Lumen
	23W	40123	Spiral, Soft White (ES5M823DIM2)
GE	26W	FLE26/2/DVR/40	R40
Sylvania	5W	CF5EL/B10/827/L/DIM	Candle
	5W	CF5EL/B10C/DIM/827/ADP	Candle
	5W	CF5EL/DEC/DIM	Candle
TCP	3W	8T03CL	Candle Clear
	5W	8TC05F	Candle
	5W	8TFC05F	Candle, flame tip
	8W	8A08WH	A-bulb
	23W	40123	Spiral

† Requires a minimum of 2 lamps
†† Requires a minimum of 3 lamps
© Lutron Electronics Co., Inc. | PN 368-3266J


Appendix

Dial on the Ariadni®/Diva®/Lumea®/Skylark Contour®/Toggler® 150W C·L dimmer to adjust the low-end trim


Ariadni/Toggler

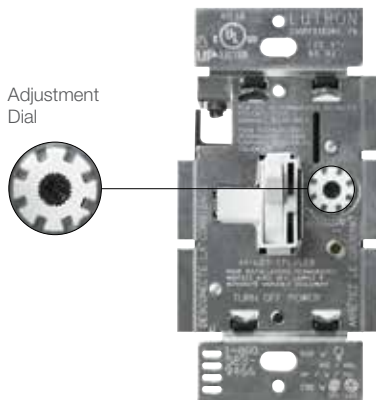


Diva

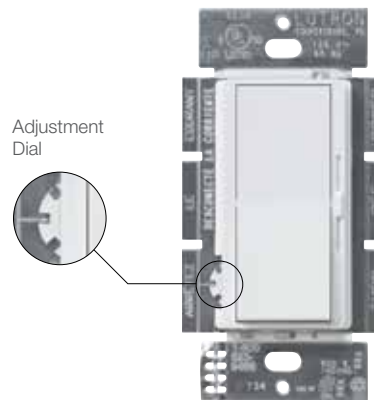

Lumea

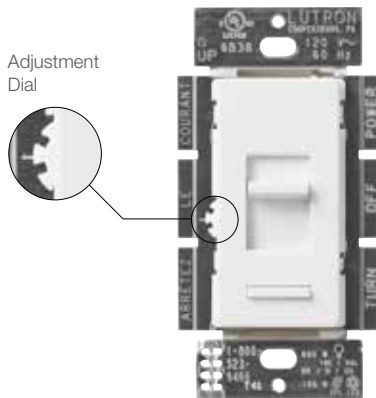

Skylark Contour

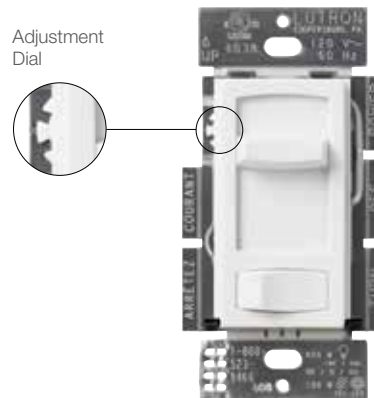

Go back

www.lutron.com

World Headquarters 1.610.282.3800 | 24/7 Technical Support 1.800.523.9466 | Customer Service 1.888.LUTRON1 (1.888.588.7661)

© Lutron Electronics Co., Inc. | P/N 368-3266 REV J