

clear pouring TOPCOAT™


Create a smooth, high-end finish with this pouring topcoat. Dries to a lacquer-like, high-gloss finish. Ideal for canvases, wood panels, or other flat art surfaces. This one-step formula eliminates the need to mix harsh chemicals and flows into a self-leveling, crystal clear coat the will not yellow, leaving your artwork with its original vibrance.

- Water-based
- One-step process
- High-gloss finish



HOW TO USE CLEAR POURING TOPCOAT

Do not shake. Pour over dry, painted surface. Tilt surface for even coverage and drain off excess to prevent pooling. Smooth out sides with a palette knife or brush. Place at a 45° angle and allow to air dry overnight. If a thicker finish is desired, apply a second coat and place surface at the opposite 45° angle. Avoid disturbing surface while topcoat is drying. Application temperature above 50°F. Do not freeze. Water-based. Self-leveling. Non-yellowing. Soap and water clean up.

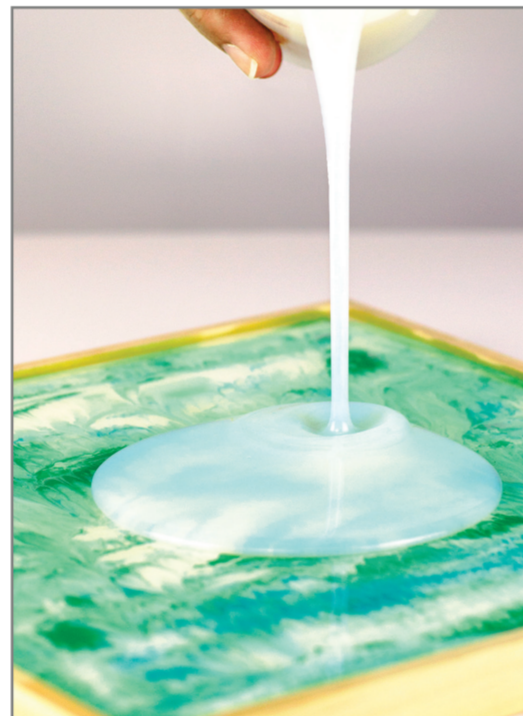

TIPS FOR USING CLEAR POURING TOPCOAT

- Pour enough Clear Pouring Topcoat to cover the entire surface at one time. Tap the edge of the surface to help spread the product over the edges.
- Use a gloved hand or a palette knife to wipe off excess from the edges.
- If applying a second coat, ensure the first coat is dry. Most applications of Clear Pouring Topcoat will dry within 12-48 hours.
- Mix Clear Pouring Topcoat with paint to produce a transparent tint. Be sure to mix well to ensure an even coat.

