


### Features

- Acrylic
- Six transducers and a control amplifier with 25' (7.6 m) of wiring
- User-friendly high-resolution color touch screen (in polished chrome)
- 122 BubbleMassage™ airjets
- With Zones of Control™ feature
- Blower motor with 300 W heater
- Slotted overflow for maximum bathing depth
- Molded lumbar support for comfort
- Available with four chromatherapy lights and Bask™ heated surface with three temperature settings [-GVCLW/GVCRW]
- Integral three-sided tiling flange for alcove installation
- Left or right drain
- 60" (1524 mm) x 30" (762 mm) x 19" (483 mm)

### VIBRACOUSTIC® BUBBLEMESSAGE™ BATH

## K-1167-GVL

ALSO K-1167-GVR, K-1167-GVCLW,  
K-1167-GVCRW

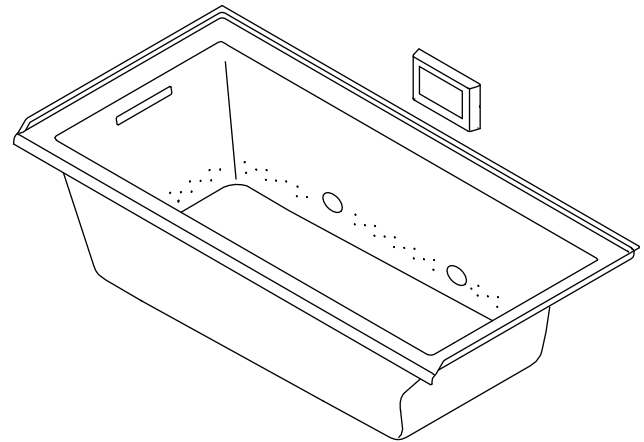

### Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.19.7/CSA B45.10
- CSA B45.5/IAPMO Z124
- ASTM E162
- ASTM E662
- UL 1795

### Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes
- CP: Polished Chrome
- BN: Brushed Nickel

### Specified Model

Model	Description	Colors/Finishes	
K-1167-GVL	VibrAcoustic BubbleMassage bath, left drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
K-1167-GVR	VibrAcoustic BubbleMassage bath, right drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
K-1167-GVCLW	VibrAcoustic BubbleMassage bath with Bask and chromatherapy, left drain (shown)	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
K-1167-GVCRW	VibrAcoustic BubbleMassage bath with Bask and chromatherapy, right drain	<input type="checkbox"/> 0	<input type="checkbox"/> Other _____
<b>Required Accessories</b>			
K-7271	Clearflo slotted overflow brass bath drain <b>OR</b>	<input type="checkbox"/> CP	<input type="checkbox"/> Other _____
K-7272	Clearflo slotted overflow bath drain – PVC pipe	<input type="checkbox"/> CP	<input type="checkbox"/> Other _____

### Product Specification

The acrylic VibrAcoustic bath shall be 60" (1524 mm) in length, 30" (762 mm) in width, and 19" (483 mm) in height. Bath shall feature six transducers and a control amplifier with 25' (7.6 m) of wiring. Bath shall feature a user-friendly high-resolution color touch screen (in polished chrome). Bath shall have blower motor with 300 W heater, 122 BubbleMassage airjets, and Zones of Control. Bath shall feature slotted overflow for maximum bathing depth, and molded lumbar support for comfort. Bath shall be available with four chromatherapy lights and Bask heated surface with three temperature settings [-GVCLW/GVCRW]. Bath shall be for alcove installation and features integral three-sided tiling flange. Bath shall have left or right drain. Bath shall be Kohler Model K-1167-\_\_\_\_\_-\_\_\_\_\_.

