

The Benefits of  
**SANICUBIC® 1**

- Sanicubic 1 can handle up to 50 gallons per minute from several fixtures
- Powerful motor for absolute reliability and efficiency
- Thermally protected
- Visual LED alarm mounted on the unit (wired audible alarm included with the system)
- Easy installation above the floor
- Accepts accidental flushing of sanitary items, such as feminine hygiene products.



**SANIFLO®**  
packaged grinding  
systems



The Benefits of  
**SANICUBIC® 2**

- Sanicubic 2 can handle up to 90 gallons per minute from several fixtures
- Dual motor for absolute reliability and power
- Thermally protected
- Visual LED and audible alarm mounted on the unit (wired audible alarm included with the system)
- Easy installation above the floor
- Accepts accidental flushing of sanitary items, such as feminine hygiene products.



**SANIFLO®**  
A Group SFA Company  
Toll Free: 1-800-571-8191

[www.saniflo.com](http://www.saniflo.com)

Copyright 2012 SFA SANIFLO, Inc. All rights reserved



**SANICUBIC® 1**

Above the floor simplex system



Part# 089



↑ 36 ft. ↑   ← 328 ft. →

**Discharge:** Vertically to 36 ft. (11m) and/or Horizontally to 328 ft. (100m)

**Discharge rate at 36':** 26 gal/min (98 liters/min)

**Discharge rate at 3':** 50 gal/min (189 liters/min)

**Discharge pipe diameter:** 1½"

**HP:** 1 HP

**Amperage:** 10.0 A

**Temperature:** Maximum 158°F (70°C)

**Dimensions:** H 13¾" (35cm) x W 18" (46cm) x D 16¾" (42.6cm)

**Motor:** A powerful 1 HP grinder pump

**Power supply:** 115 Volts - 60 Hz Single phase operation

**SANICUBIC® 2**

Above the floor duplex system



Part# 029



↑ 36 ft. ↑   ← 328 ft. →

**Discharge:** Vertically to 36 ft. (11m) and/or Horizontally to 328 ft. (100m)

**Discharge rate at 36':** 38 gal/min (144 liters/min)\*\*

**Discharge rate at 3':** 90 gal/min (341 liters/min)\*\*

**Discharge pipe diameter:** 1½"

**HP:** 1 HP per motor

**Amperage:** 13.0 A

**Temperature:** Maximum 158°F (70°C)

**Dimensions:** H 16½" (42cm) x W 23¾" (60cm) x D 19¼" (49cm)

**Motor:** Two powerful 1 HP grinder pumps

**Power supply:** 220/240 Volts - 60 Hz Single phase operation

\*\*Both motors in operation.

# SANICUBIC® 1

A simplex grinder system, fully pre-assembled with its unique above the floor installation.

## INLET - UP TO 4 INLETS

3 inlets - 1½" or 4"  
1 inlet - 1½"  
(coupling provided)

VENT  
1½"

DISCHARGE  
1 ½" with a check valve built inside

## CONTROL PANEL

Visual mounted alarm, LED power control and overload indicator

## MOTOR

A powerful 1 HP grinder pump

These units come equipped with a visual and audible external alarm box (15 ft. long wire)



## INLET - UP TO 4 INLETS

3 inlets - 1½" or 4"  
1 inlet - 1½"  
(coupling provided)


## INLET - UP TO 5 INLETS

4 inlets - 1½" or 4"  
1 inlet - 1½"  
(coupling provided)





Scan with your smart phone to watch a clip of the SaniCubic 1 system

Performance Curve

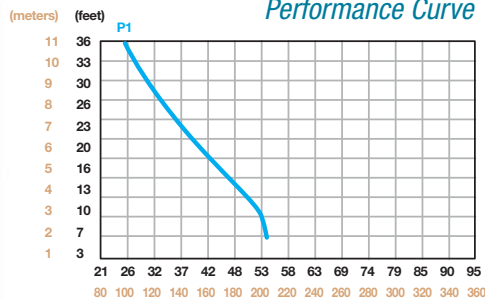

Flow Rate: (gallons/minute)  
(liters/minute)

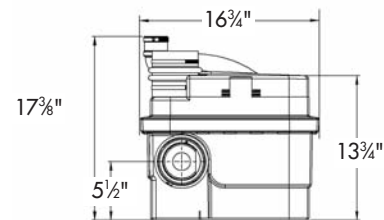

# SANICUBIC® 2

The ultimate duplex grinder system, fully pre-assembled with its unique above the floor installation.

## INLET - UP TO 5 INLETS

4 inlets - 1½" or 4"  
1 inlet - 1½"  
(coupling provided)

VENT  
1½"

## CONTROL PANEL

Visual and audible mounted alarm, LED power control and overload indicator

DISCHARGE  
1 ½" with check valves built inside

## INLET - UP TO 5 INLETS

4 inlets - 1½" or 4"  
1 inlet - 1½"  
(coupling provided)


## INLET - UP TO 5 INLETS

4 inlets - 1½" or 4"  
1 inlet - 1½"  
(coupling provided)

## MOTORS

Two powerful grinder pumps of 1 HP each

Performance Curve

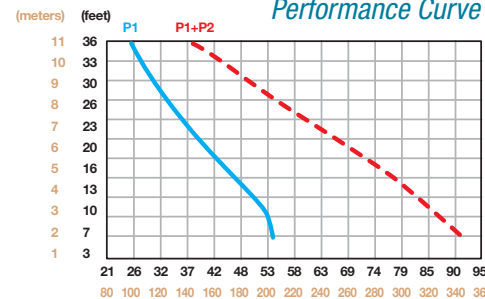

Flow Rate: (gallons/minute)  
(liters/minute)

