


Installation

1 Cleaning the air hose

- A 3/8" air hose is required, with a maximum length of 25 ft.
- Clean the air hose of accumulated dust and moisture before connecting it to the air supply.



NOTE: If a longer air hose is required, connect a 1/2" air hose to the 3/8" air hose to ensure the tool has the necessary air supply.

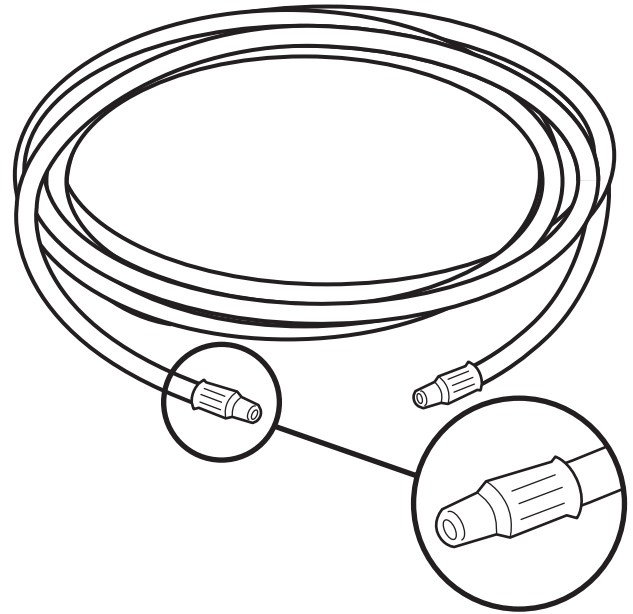

2 Connecting to the air supply

- Always use clean dry air. Excessive moisture and dirt will greatly reduce the life of any air motor. We recommend the installation of an in-line filter-regulator as close to the tool as possible.
- Ensure all hoses and fittings are the correct size and secured tightly.

| Recommended Air Line Set-Up | |
|-----------------------------|--------------------|
| Part | Description |
| A | Dual Action Sander |
| B | Quick Plug |
| C | Quick Coupler |
| D | Air Hose |
| E | In-line Filter |
| F | Air Compressor |

