

GOOF PROOF SHOWER

GPSS-3024 Goof Proof Shower Seat



This Shower Seat is a heavy duty stay-in-place molded plastic form that is easily installed, and can be tiled the same day. The Shower Seat is a standard 30" wide, and has guide marks on the top surface to make it easy to trim the seat to 24" wide. Two level vials are supplied to indicate the proper minimum water drainage slope of 1/4" per 12" run. For new installations, the seat is installed over the wall boards and secured into blocking between the studs using six 2 1/4" long screws. For retrofit installations, the seat is installed over the tile and secured with the screws into six plastic toggle anchors.

STEP 1

Install A Shower Seat — FAST, EASY & RIGHT

For new or retrofit installations!

Locate and mark



Included Hardware

Screws,
Toggle Anchors
and Shims
(6 each)





STEP 2

Install with supplied hardware



Specifications

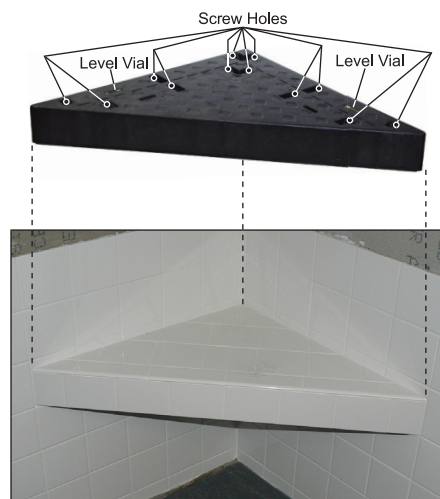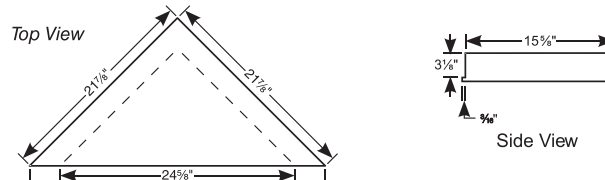

STEP 3

Finish with tile



- Easily Adjustable width 24" or 30"
- Six pre-drilled mounting holes
- Level vials ensure correct pitch
- Full width tile support ledge
- Waffle pattern assures optimal tile adhesion

Mark E. Industries, Inc.
855 Dunbar Avenue
Oldsmar FL. 34677
Phone 1-866-771-9470
Fax 813-855-2533
www.markeindustries.com
info@markeindustries.com

Innovations for Contractors, Builders
and the Do-It-Yourselfer



MARK E
INDUSTRIES