



INSTRUCTIONS FOR REPLACEMENT OF COOLER PADS

1. OPEN UNIT UP

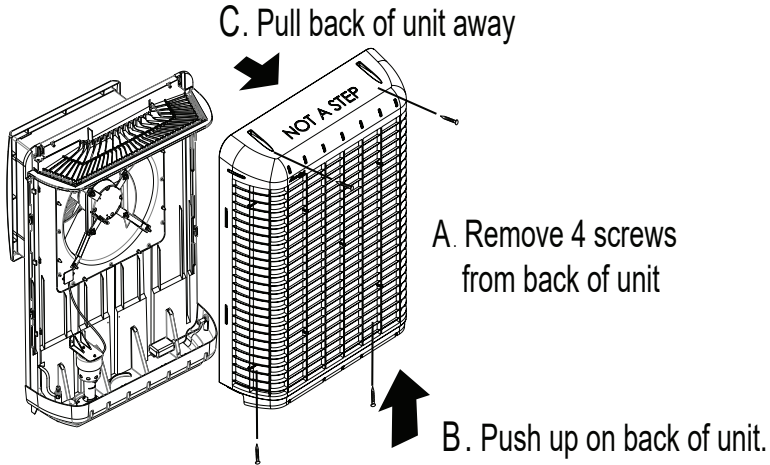


2. REMOVE OLD PADS

Locate media pegs and remove.




Using pliers, pull plugs out from the exterior.

Or pull clips off pegs from the interior.



3. INSTALL NEW BACK PAD



Position large pad inside the back grill.

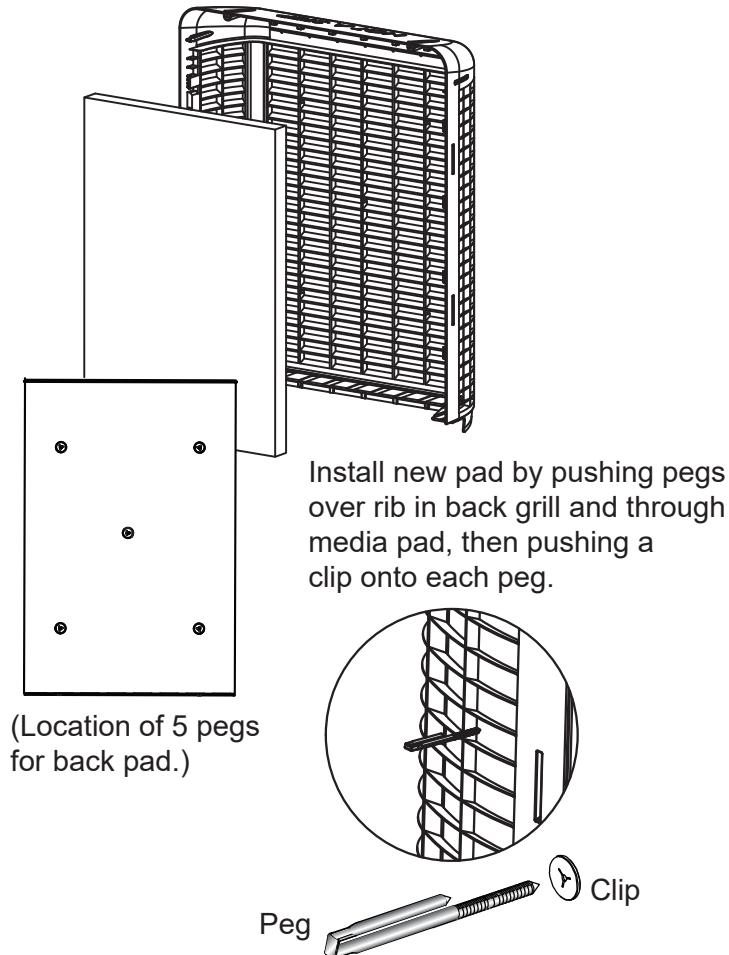

NOTE: New plugs and clips are included in replacement kit. Dispose of used pads, plugs and clips.

4. INSTALL NEW SIDE PADS

Position small sections of the pad in the sides of the back grill.

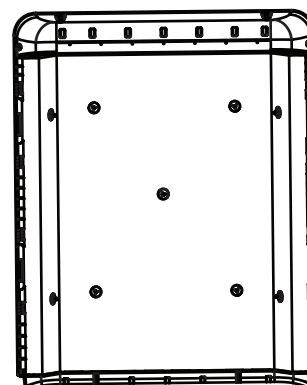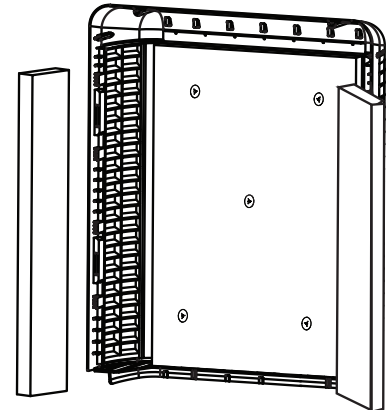

Install each side pad using 2 pegs and clips.

Locate pegs at top and bottom for best support.