




Hardware			
Label	Picture	Description	QTY
1		Bolt (M8*60MM)	9
2		Spring Washer	9
3		Washer	9
(4)		Allen Key	1
Assembly Preparation			
Before Beginning Assembly:			
<ul> <li>Read instructions, cover to cover-</li> <li>Have 2 adults on hand for assembly-</li> <li>Do not assemble on flooring or carpet-</li> <li>Assemble on a clean non-marring surface (packing foam)-</li> <li>Save all packaging until finished-</li> </ul>			
Assembly Steps			

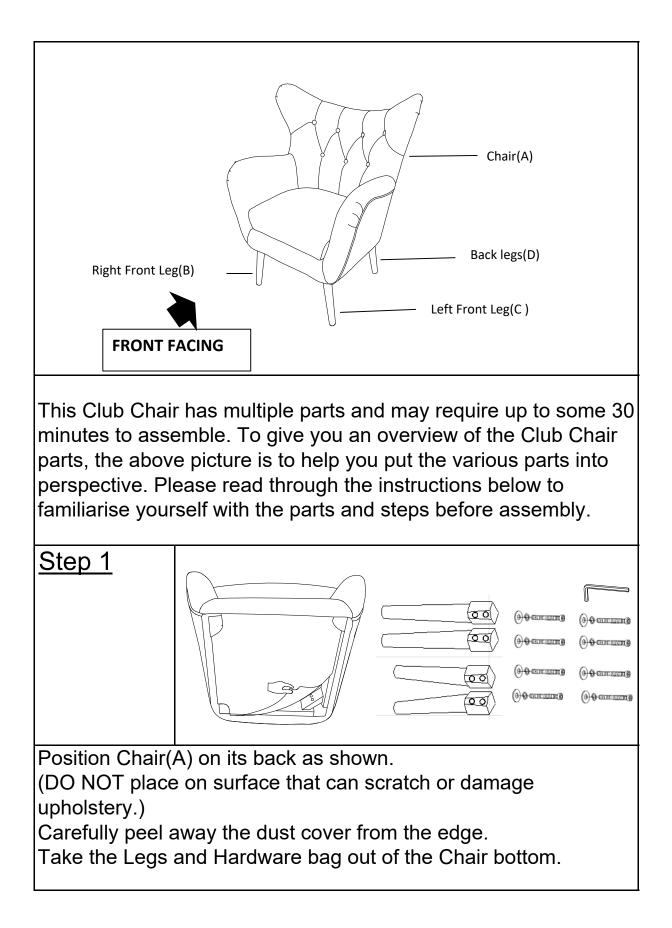

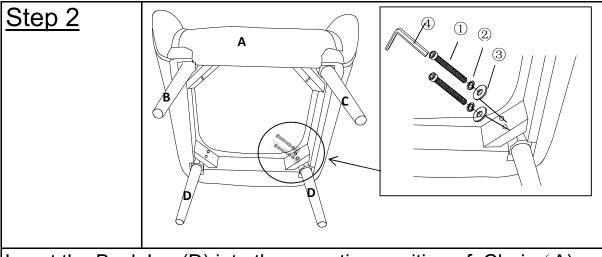

Insert the Back Leg(D) into the mounting position of Chair (A). Attach the Back Leg(D) using Bolts(1), Spring Washers(2) and Washers(3)with Allen Key(4).

Repeat the same process to install the remaining three Legs. **At this stage, Loosely tighten these bolts.** 

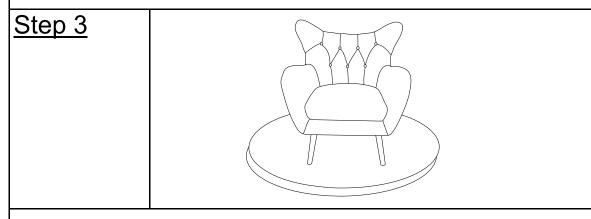

Place the chair on a LEVEL SURFACE to see if it wobbles. If it wobbles, press firmly down on both armrests at the same time. This will help to ensure all Bolts and gaps reach full alignment status.

If no wobbles found, proceed to tighten all the bolts.DO NOT fully tighten a BOLT in one go and then move on to the next.

Rather, In a sequential manner, gradually tighten each Bolt until all bolts are evenly secured.

This methodology will ensure maximum eveness once all Bolts are fully tightened.

