

NICOR[®] | **LED**

4" Retractable **LED** Downlight
DLR4-R



**Adjustable Accent Lighting
For Your Residential Spaces**

DLR4-R

4" Retractable LED Downlight

The **DLR4-R retractable fixture** takes the guesswork out of where to position your light. This warm ambient light source gives you 359 degrees of rotation and 80 degrees of adjustable tilt making this 4" fixture perfect for both accent and task lighting. You direct the light exactly where you need it without having to move anything in your design space. From LED color rendering and CCT options to fixture performance, this series is ideal for commercial, hospitality and residential applications.

Construction

Cast aluminum trim routes heat away from electrical components
Low profile, integrated driver, allows for use in shallow housings
Adjustable trim allows for 359° of rotation and 80° of tilt
Tension rail allows for locking to a fixed angle

Optical System

Polystyrene diffuser and reflector cone create a uniform light distribution that reduces glare without sacrificing lumen output
Beam angle of 61°

Electrical

Utilizes high performing LEDs with greater than 90 CRI and an R9 greater than 50
Dimmable to less than 8% with most standard triac dimmers
Operating temperature rating of 0°F to 120°F (-18°C to 49°C)
Input voltage of 120V
Meets FCC 15: 2016 Class B requirements
TM-21 Reported L70(9k) life >54,000 hours
LM-79, LM-80 testing performed in accordance with IESNA standards

Finish


Exterior white powder coat finish, with interior high reflective finish

Installation

Compatible with most 4" recessed housings (19000A-LED, 19000A-LED-ID, 19000AR-LED) at least 4" high with inside diameter between 4" - 4-1/2"
Quick and easy installation with a screw-in Edison base (GU24 socket string available) and friction clip system (base not needed with 19000A-LED-ID housing)

Warranty

5-year limited system warranty standard

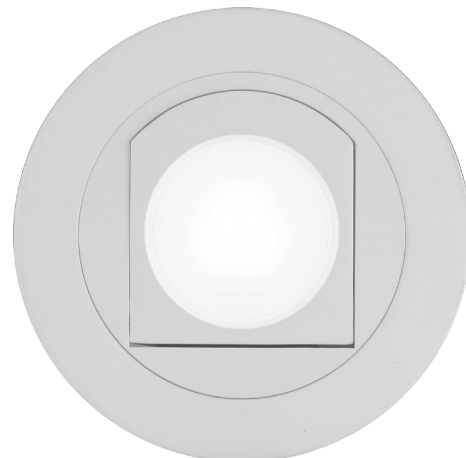

PRODUCT INFORMATION

LED Reported Lifetime: >54,000 Hours
Input Voltage: 120V
Power Draw: 10W
Fixture Height: 3.375in (86mm)
Trim Width: 5in (127mm)



ORDERING INFORMATION

Example: DLR4-R-10-120-3K-WH

Series	Version	Voltage	CCT's	Trim Color
DLR4-R (Retractable)	10 (Version 1.0)	120 (120V)	2K (2000)	WH (white)
			3K (3000)	
			4K (4000)	

All reports based on current industry standards; field performance may differ from laboratory performance
Specification and dimensions subject to change without notice