

HyLoft®

Unique Storage

HyLoft's heavy duty shelving systems have patented low-profile brackets so that you can store more items without a large infringing bracket. Each shelf can support up to 150 lbs. All of our products feature a scratch resistant white powder coat finish. Shelves are 15" x 45". There are two shelves per box.



HyLoft's Add-On Storage Hooks add even more versatility to the already popular ceiling storage unit. These hooks hang from any HyLoft Ceiling or Wall mounted unit. They can be used to hang bikes, bags, sports equipment, lawn and garden items, extension cords, and so much more. Each hook is 4" x 6.5", and there are 4 hooks in each package.

HyLoft's Add-On Storage Racks provide endless ways to maximize space and neatly store miscellaneous items. Hang a ladder, lawn tools, lumber, surfboard or any other long items. These hanging racks will attach securely to any HyLoft ceiling or wall storage unit. Each rack is 10" x 32", there are two racks per package.



Accessories




ASSEMBLY INSTRUCTIONS

48" X 48" Ceiling Mounted Shelf

MISSING A PART?

There is no need to return this item to the store. Instead call our TOLL FREE HOTLINE.

1-800-253-1561

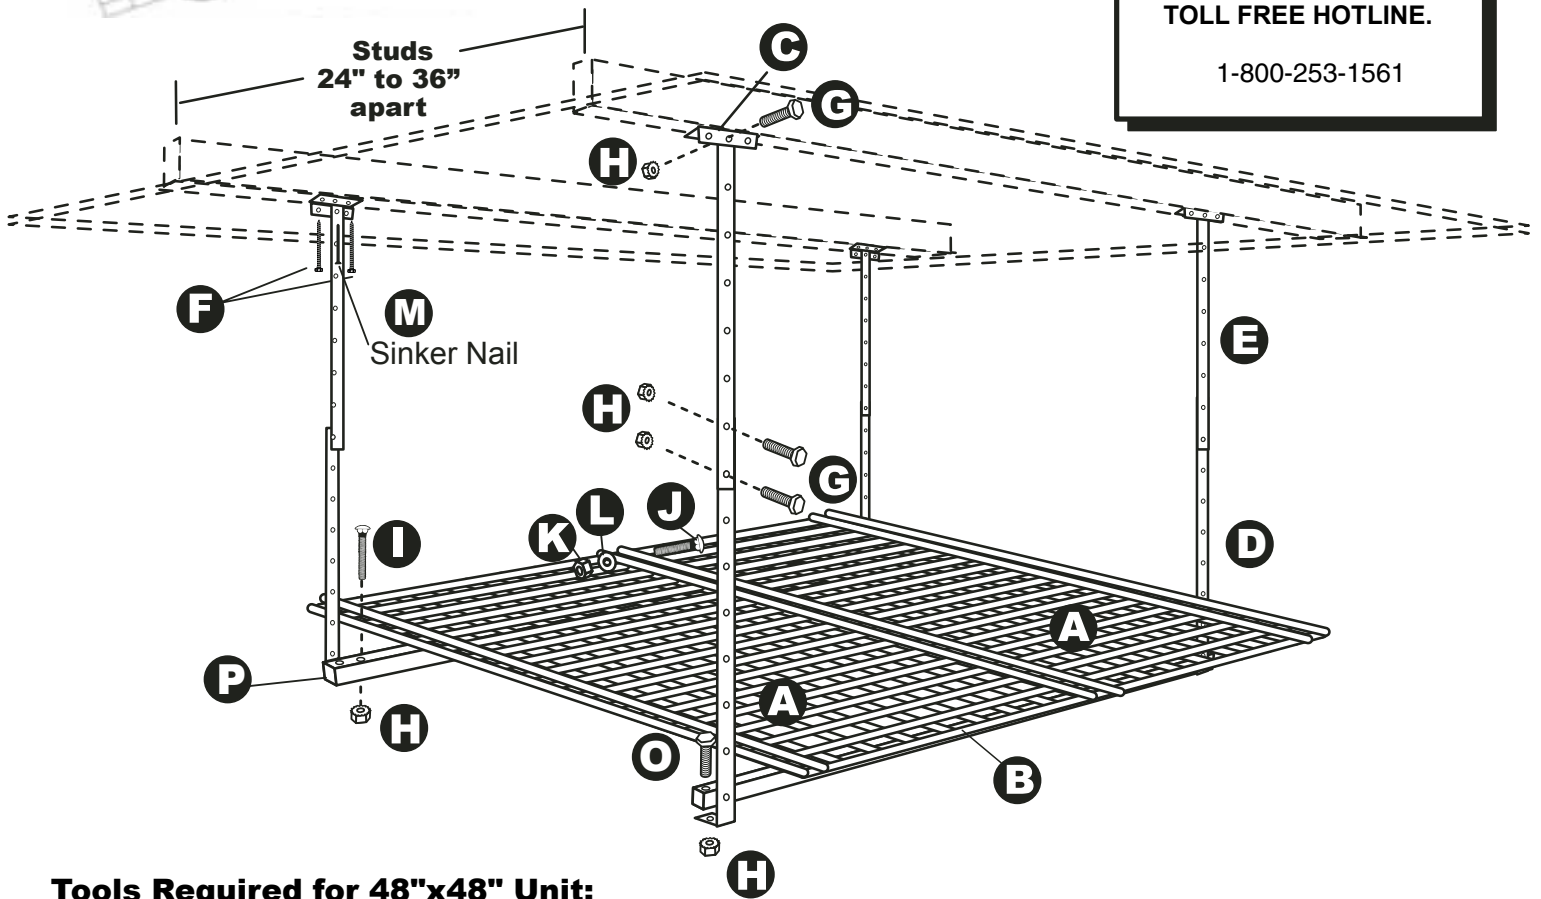

Tools Required for 48"x48" Unit:

- Hammer
- 7/16" Wrench(11 mm)
- Stud Finder
- Drill and 3/16"(5 mm) drill bit
- Ratchet and 7/16"(11 mm) Socket
- Tape Measure
- Pencil
- Ladder

Parts Included:

- A** 2 wire grids 24"wide(61cm)
- B** 2 support Bars
- C** 4 Angle Brackets
- D** 4 Downrods Bent
- E** 4 Downrods Straight
- F** 8 Lag Screws 5/16" X 2 1/2" (8mm x 63mm)
- G** 12 Hex Bolts 1/4" X 1/2"(6mm x 13mm)
- H** 20 Hex Nuts Serrated 1/4"(6mm)
- I** 4 Carriage Bolts 1/4" x 2" (6mm x 51mm)
- J** 2 Carriage Bolts 8/32 X 1"(4.8 mm x 25.4mm)
- K** 2 Hex Nuts 8/32"(5mm)
- L** 2 Washers 3/16" ID(5mm)
- M** 4 Sinker Nails
- N** 2 Plastic Tie Straps
- O** 4 Hex Bolts 1/4" X 1 1/2" (6mm x 38mm)
- P** 4 End Plugs
- Q** HyLoft Sticker

Instructional Video



These Instructions and Limited Warranty




Before beginning the unit installation, decide where it will work best for you above the open garage door (if room allows) or beyond the open door.

PLEASE NOTE If installing above the open garage door: at least 17" of open space is required between the highest point of door as measured during its upward travel and the ceiling.

Locate the ceiling joists in the area of desired installation and determine the direction in which they are running. In order to adequately disperse the stored load, you should install not more than two HyLoft units on any two ceiling joists. The ceiling Angle Brackets are installed parallel to the ceiling joists. Refer to the diagram below or photos on the package for additional installation clarification.



INSTALL CEILING ANGLES

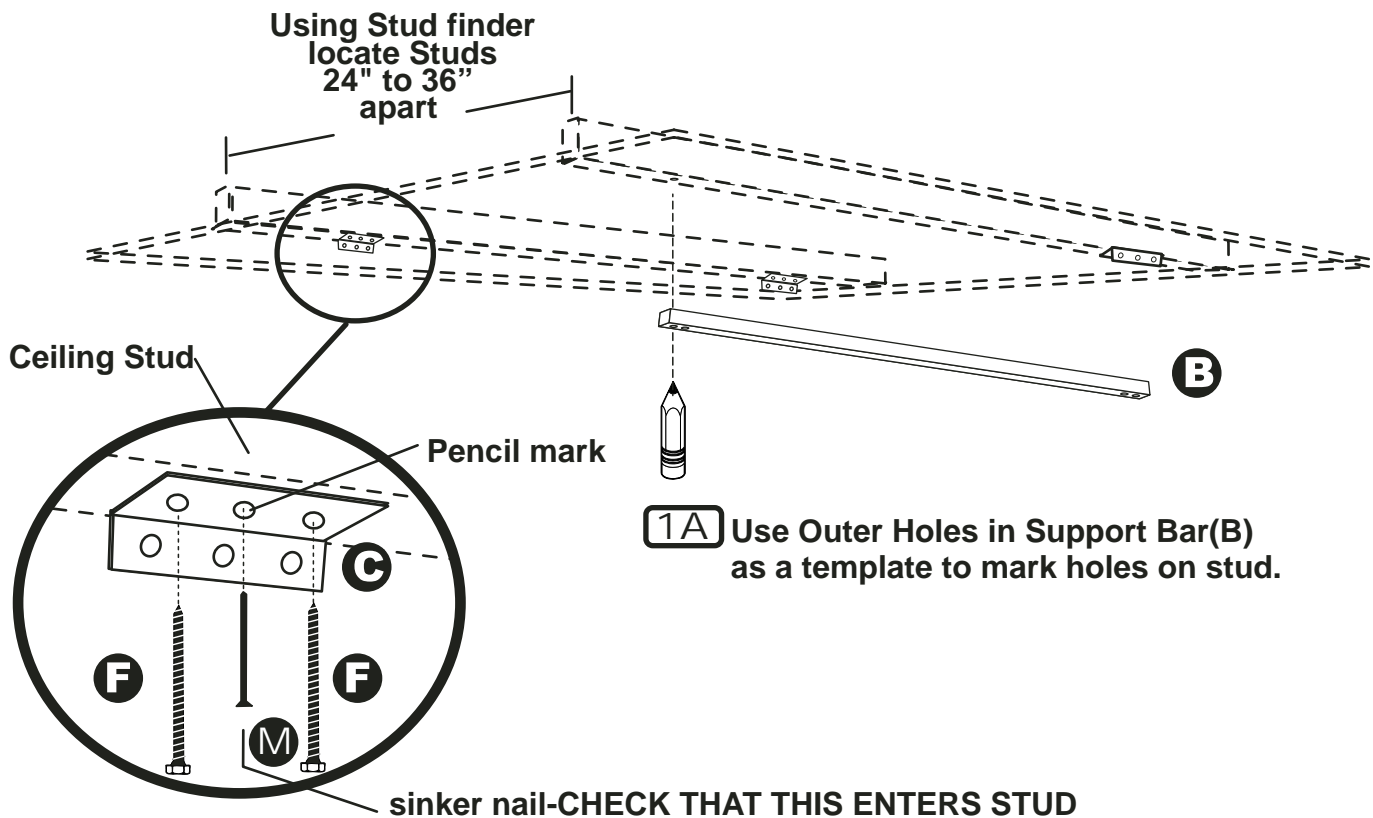


1B Attach Angles(C) into Ceiling Studs.

Use sinker nail (M) in center hole (with pencil mark) to hold in place and test that it is in the stud.

Pre-drill 3/16" holes for 2 screws.

Use a 7/16" socket wrench or Nut Driver to install two of the 1/4 x 3" screws(F)

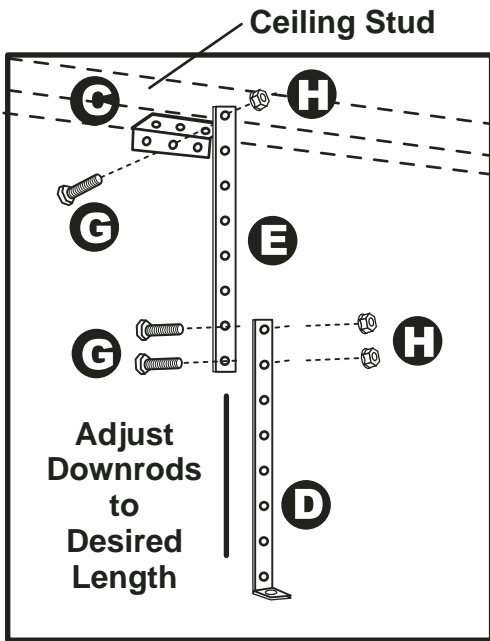


Adjust Downrods to Desired Length

2A Connect two-Piece Downrods(D & E) to center hole in Ceiling Angle

2

ATTACH DOWNRODS and SUPPORT BARS

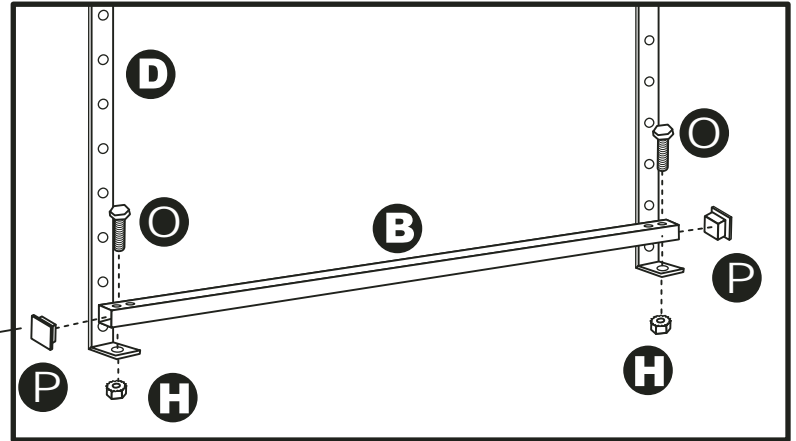


Insert end plugs before attaching

2B Connect Support Bars(B) to Downrods

3


PLACE AND ATTACH GRIDS

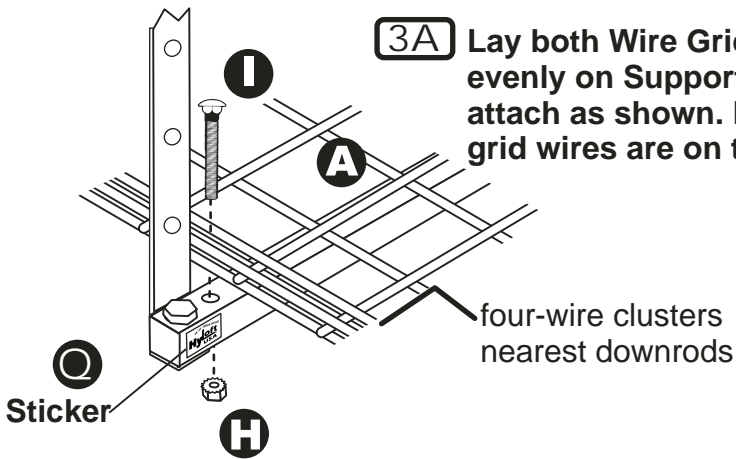

3A Lay both Wire Grids(A) evenly on Support Bars and attach as shown. Note: Long grid wires are on the bottom.

four-wire clusters nearest downrods

Sticker

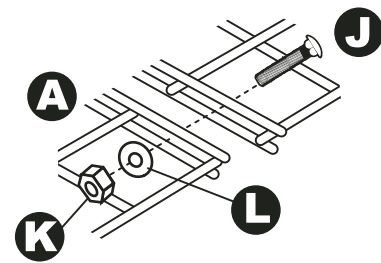

3B Bolt together Grids(A) using 2 bolts(J), washers and nuts(K).

You have now completed the installation are ready to load your new HyLoft Storage Unit. **(Maximum 250 lbs. per 48" x 48" unit, evenly distributed)**. Place the sticker provided on a support bar for easy reference information.

Periodically (at least annually) check all connections to ensure that they remain tightly fastened.

Installing Two HyLoft 48 x 48 Units

Follow the instructions above. Multiple HyLoft's may be joined together by using tie straps provided.