

# mini aqua® UNIVOLT

PART NO. FP1035

## DESCRIPTION

Using the proven functionality of our other mini pumps, the Mini Aqua® is incredibly slim in size. It is designed to give the installation flexibility where the latest generation of A/C units are becoming even smaller.

The Aspen Mini Aqua® pump is designed to be installed:

- Within wall mounted evaporators
- In plastic conduit

## IN THE BOX


- 1 x Mini Aqua® pump
- 1 x Anti Siphoning Device
- 1 x Assembled reservoir including filter, float and lid
- 1 x 150mm / 6" vinyl breather tube 6mm / 1/4" i/d
- 1 x 1.5m / 59" Suction tube 6mm / 1/4" i/d
- 1 x 220mm / 8.6" Blue Inlet hose 14mm / 0.5" i/d
- 1 x Drain tray connector
- 2 x Velcro strips
- 2 x Cable ties 140 / 5.5" x 3.6mm / 0.14"
- 4 x Cable ties 300mm / 11.8" x 3.6mm / 0.14"

## SPECIFICATIONS


- Pump rating: 100V – 250V AC, 16W
- 1PH 60 Hz
- 3A volt-free alarm wires, N.C. contacts rated @ 5A inductive at 230V
- Hall effect semi conductor level sensors, with high level safety
- Maximum water temperature: 40°C / 104°F
- Continuously rated
- Class II appliance
- Fully potted
- Thermally protected
- 28mm / 1.1" (h) x 165mm / 6.5" (w) x 28mm / 1.1" (d)
- Weight: 0.18kg / 6.3 US Oz

## PERFORMANCE

- Water flow rate / hr @ 0m / ft: 10L / 2.6 US Gal
- Maximum recommended head: 10m / 33ft
- 22 dB(A) @ 1m / 3.3 ft
- This is a Universal voltage pump. Different voltages may give slightly different performances.

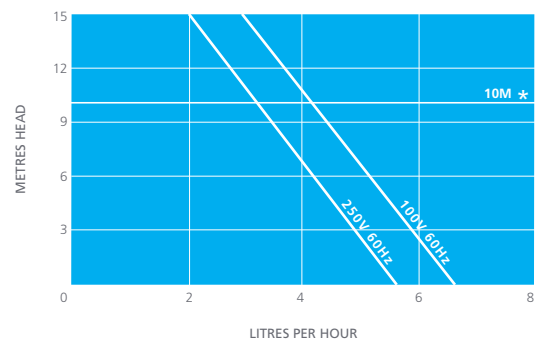

\* Max. recommended head

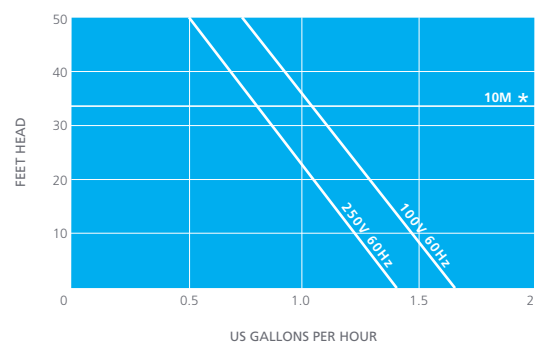

\* Max. recommended head