

PERFORMANCE PLATINUM™



The new degree of comfort®


PERFORMANCE PLATINUM™ Series Condensing Tankless Gas Water Heaters with Built-In Recirculation

Key Features

- **Compatible with 1/2" gas line**
- **Built-in recirculation** — Provides instant hot water at the tap¹ saving time and reducing water waste
- **Timer-Based Recirculation** — Gives homeowner options to program unit timer to match their daily routine
- **Internal Recirculation** — Pumps water through the heat exchanger in a loop to prevent cold water bursts
- **Automatic Freeze Protection** — Pump turns on at 46°F, recirculating internally to keep the unit safe from freezing temperatures
- **Max vent lengths: 100' @ 3", 50' @ 2"** — Means more flexible and versatile installation options
- **Common vent two units** — Fewer wall penetrations, easier to install and more flexible options
- **Vent with Room Air Intake (single units only, not common vented)** — Save time and money on installation
- **Max GPM of 11** — for 199K BTU model

Crossover valve and service valves included.

\$125 VALUE



Specifications

Rheem Model Number		ECO200DVRHLN	ECO180DVRHLN
Gas Input Rate	MAX	199,000 BTU/h	180,000 BTU/h
	MIN	18,000 BTU/h	18,000 BTU/h
	High Altitude (2,500-10,000 ft.)	180,000 BTU/h	180,000 BTU/h
Uniform Energy Factor (UEF)		0.94	0.94
Gallons Per Minute (GPM)	MAX GPM	11.0 Gal	9.9 Gal
	45°F Rise	8.5 Gal	7.7 Gal
	77°F Rise	5.0 Gal	4.5 Gal
Number of Bathrooms ²		4	3 - 4
Temp. Range		100°F - 140°F	
Type		Indoor Direct Vent (Outdoor Conversion Coming Soon)	
Flue System		Sealed Combustion Direct Vent, Single Vent	
Ignition System		Direct Electronic Ignition / Automatic Flame Sensing	
Burner System		Premixed Metal Fiber Burner	
Gas Valve System		Air ratio valve	
Minimum Flow Activation Flow		0.5 GPM	
Minimum Continuous Flow Rate		0.4 GPM	
Internal Pipe Material		STS 304, Copper Tubing	
Water Holding Capacity		Under 2 Gallon	
Water Pressure	MAX	Hot water 150 psi	
	MIN	15 psi	
Gas Pressure	Nat. Gas	5.0" WC to 10.5" WC	
	Casing	Cold Rolled Carbon Steel	
Materials	Heat Exchanger	Heat Exchanger : STS 304	
	Safety Devices	Flame Sensor, Overheat Cut Off Limit Switch , Gas Leak Detector sensor, Water Leak Detector Sensor, Exhaust Temperature Sensor, Water Temperature Sensor	
Warranty		12-Year Heat Exchanger – Residential 5-Year Heat Exchanger – Commercial 5-Year Parts including Pump 1-Year Labor	

ECO200DVRHLN & ECO180DVRHLN

Indoor Direct Vent Model
18,000-199,000 BTU/h
Natural Gas



Installation Information

Rheem Model Number	ECO200DVRHLN / ECO180DVRHLN
Height	28.7"
Width	17.3"
Depth	14.8"
Weight	85 lbs
Max. Vent Run	2" (50ft) / 3" (100ft)
Venting Materials	Schedule 40 PVC, CPVC, PP
Power Supply	120V 60Hz
Max. Power Consumption	172W(82W+90W_PUMP)
Gas Conn.	3/4"
Water Conn.	3/4"


¹ Individual results may vary.

² Individual results may vary based on temperature rise demands.



PERFORMANCE PLATINUM™ Series Condensing Tankless Gas Water Heaters with Built-In Recirculation

Water Heater Flow Rate Curves




Model Number	Temperature Rise (° F)							
	35°	45°	50°	60°	70°	80°	90°	100°
ECO200DVRHLN Water Flow (GPM)	11.0	8.5	7.7	6.4	5.5	4.8	4.3	3.8
ECO180DVRHLN Water Flow (GPM)	9.9	7.7	6.9	5.8	5.0	4.3	3.9	3.5

Above estimates are for sizing purposes only.

Model #	Inlet Temp. 37-47°		Inlet Temp. 47-57°		Inlet Temp. 57-62°		Inlet Temp. 62-77°	
	Max. GPM	Approx. Usage						
ECO200DVRHLN	4.8	☺☺☺	5.5	☺☺☺☺	6.4	☺☺☺☺☺	7.7	☺☺☺☺☺☺
ECO180DVRHLN	4.3	☺☺☺	5.0	☺☺☺☺	5.8	☺☺☺☺☺	6.9	☺☺☺☺☺☺☺

Dimensions

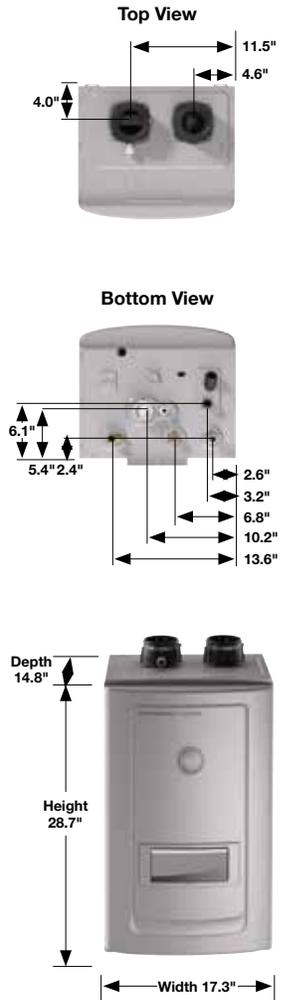

Venting

Maximum Vent Length for Direct Vent (2 Pipe)

Number of Water Heaters Common Vented	PIPE SIZE		
	2"	3"	4"
1	50'	100'	N/A
2	N/A	50'	83'

NOTE: Minimum vent length 7' for 2" and 3" venting.

Venting Materials Allowed: PVC, CPVC, PP


Equivalent Elbow Lengths in Ft. of Straight Pipe	Equivalent Elbow Lengths in Ft. of Straight Pipe	
	2"	3"
90°	8'	5'
45°	4'	2.5'

Recirculation Lengths

Maximum Equivalent Recirculation Length	
3/4"	500'
1/2"	200'

NOTE: Refer to fitting manufacturer guide for pressure loss in fittings expressed as equivalent feet.

Recirculation Pump Head Loss Curve

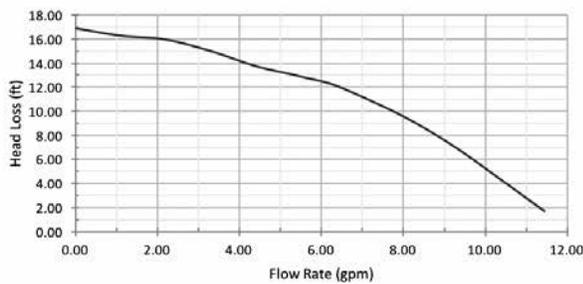

INCLUDED IN THE BOX:

- Tankless water heater with built-in recirculation pump
- Brass service valves
- Crossover valve
- Pressure relief valve
- 5' 120V 3-prong power cord
- Mounting & spare parts kit
- Vent screens
- Use & care manual

ALSO NEEDED FOR INSTALLATION:

- Schedule 40 PVC venting in 2" or 3" (sold separately)
- 120V outlet near installation location*
- Water and gas lines near installation location*
- Condensate Wastewater Neutralizer (sold separately)*

*Check local code requirements

OPTIONAL ACCESSORIES:

- On-Demand Recirculation kit & Manual Wall Switch
- Venting kits

Accessories available at homedepot.com

In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.