

## CIMARRON® CLASS 5®

### COMFORT HEIGHT® COMBINATION ELONGATED TOILET K-3609

#### Features

- Vitreous china
- Combination toilet
- Elongated bowl
- 12" (305 mm) rough-in
- 1.28 gpf (4.8 lpf)
- Less seat and supply
- 2-1/8" (54 mm) glazed trapway
- Class Five® flushing system
- With Insuliner® insulated tank lining (-U)
- 10-1/2" (267 mm) x 7-1/8" (181 mm) water area
- 28-3/4" (730 mm) x 17-5/8" (447 mm) x 30-3/4" (781 mm)

ADA

CSA B651

OBC



#### Codes/Standards Applicable

Specified model meets or exceeds the following:

- ADA
- ICC/ANSI A117.1
- CSA B651
- OBC
- ASME A112.19.2/CSA B45.1
- EPA WaterSense®

#### Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

#### Specified Model

Model	Description	Trip Lever	Colors/Finishes	
K-3609	Elongated front	left-hand	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-3609-RA	Elongated front	right-hand	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-3609-T	Elongated front, tank lock	left-hand	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-3609-TR	Elongated front, tank lock	right-hand	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-3609-U	Elongated front, insulated tank	left-hand	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-3609-UR	Elongated front, insulated tank	right-hand	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____

#### Recommended Accessories

K-4664	Brevia™ seat with cover	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-4650	Lustra™ elongated, open-front toilet seat – for Accessibility compliant installation	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____

#### Product Specification

The elongated combination toilet shall be made of vitreous china. Toilet shall be 28-3/4" (730 mm) in length, 17-5/8" (447 mm) in width, and 30-3/4" (781 mm) in height with a 10-1/2" (267 mm) x 7-1/8" (181 mm) water area. Toilet shall be 12" (305 mm) rough-in and 2-1/8" (54 mm) glazed trapway. Toilet shall be 1.28 gpf (4.8 lpf) with Class 5™ flushing system. Toilet shall be Kohler Model K-3609-\_\_\_\_\_.

# CIMARRON® CLASS 5®

## Recommended Accessories (cont.)

K-7637 3/8" Angle supply with stop

Other\_\_\_\_\_

## Technical Information

Fixture:	
Configuration	two-piece, elongated
Water per flush	1.28 gal (4.8 L)
Passageway	2-1/8" (54 mm)
Water area	10-1/2" (267 mm) x 7-7/8" (200 mm)
Water depth from rim	6-3/8" (162 mm)
Seat post hole centers	5-1/2" (140 mm)

Included components:	
Bowl	K-4309
Tank cover	1086929
Tank cover with locks	1086929-T
Trip lever, left-hand	1059436
Trip lever, right-hand	1116014

Bolt cap accessory pack	1013092
Tank accessory pack	1016548
Tank, left-hand trip lever, 1.28 gpf (4.8 lpf)	K-4421
Insulated tank, left-hand trip lever, 1.28 gpf (4.8 lpf)	K-4421-U


## Installation Notes

Install this product according to the installation guide.

Will comply with the American Disabilities Act (**ADA**) when installed per the requirements of the Accessibility Guidelines, Section 604 Water Closets, of the Act. The Model Plumbing Codes require the installation of elongated open-front toilet seats in public bathrooms.

Will comply with **CSA B651** when installed per Clause 4.3.6 of the standard.

Will comply with **OBC** Barrier Free requirements when installed per Clause 3.8.3.8 and 3.8.3.9.

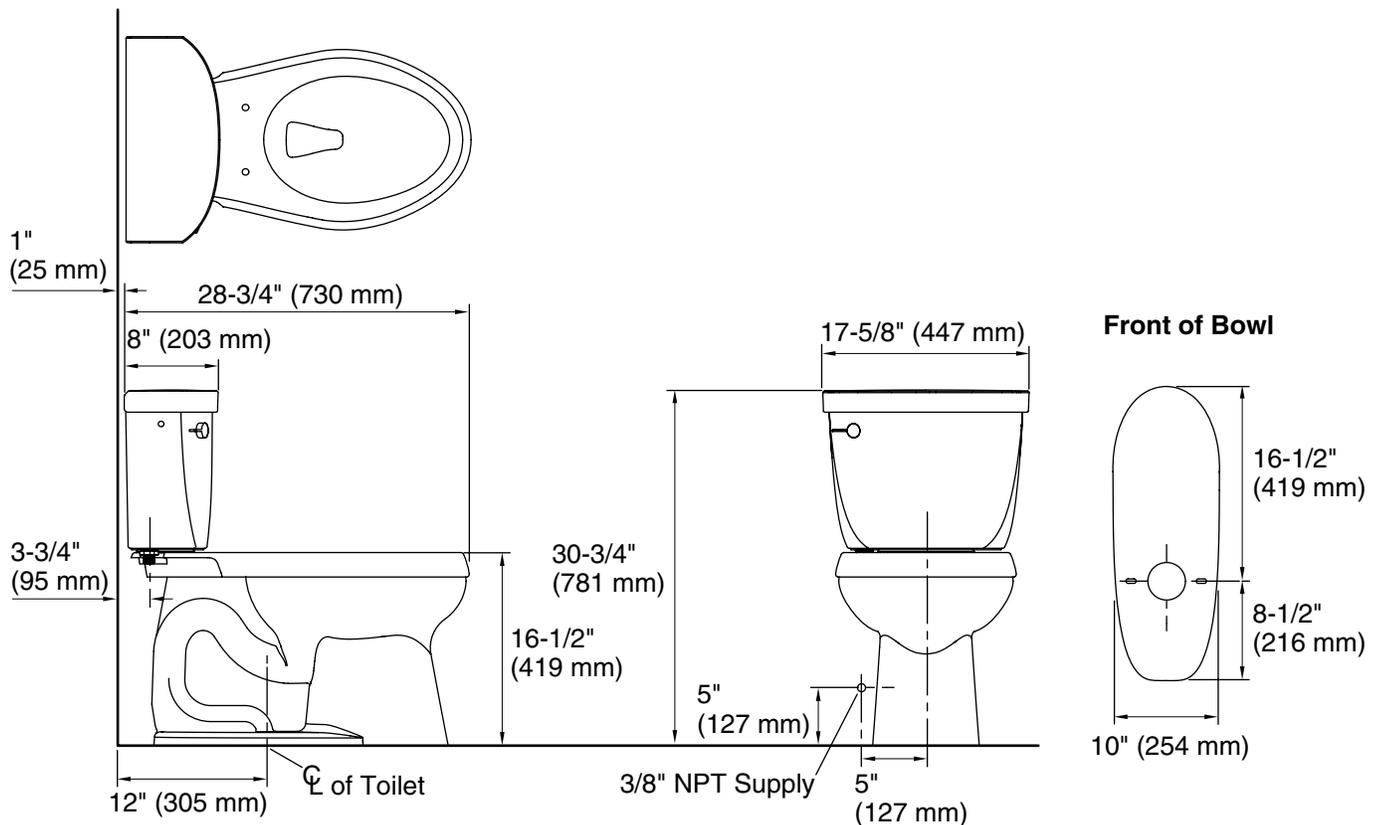

## Product Diagram