




**HITCH-HAUL® CARGO CARRIER**  
OPERATION MANUAL & SAFETY INSTRUCTIONS

**30110208**

Distributed By:  
Masterbuilt Manufacturing, Inc.  
1 Masterbuilt Court  
Columbus, Georgia 31907  
Customer Service 1-800-489-1581

Manual Code: 9011090003 101210-10JH

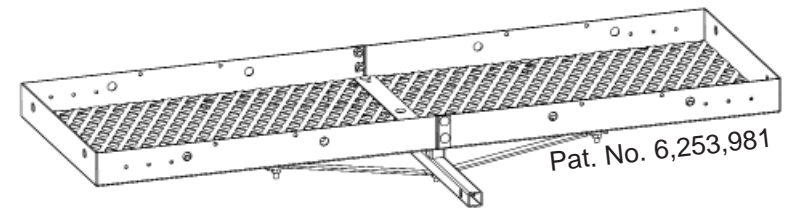


Tools needed for assembly: 2 Adjustable Wrenches

**WARNING**

- Do not exceed maximum weight capacity of 300lbs when using 1.25" receiver bar.
- Do not exceed maximum weight capacity of 500lbs when using 2" receiver bar.
- Distribute weight evenly on platform.
- Use extreme caution when transporting live animals (in approved carriers); exhaust fumes may be fatal.
- The Hitch-Haul® is not intended for transporting humans.
- Do not carry loads wider or deeper than Hitch-Haul®.
- Do not carry flammable items on Hitch-Haul®.
- Hitch-Haul® accessory tail light kit must be used when loads cover vehicle's tail lights.
- Do not allow exhaust fumes to blow directly on items. This is a FIRE HAZARD. See "IMPORTANT NOTICE".
- Masterbuilt is not responsible for any damage if warnings are not heeded.


**DO NOT LOAD SCOOTERS OR MOTORCYCLES ON HITCH-HAUL®**

**PARTS LIST**

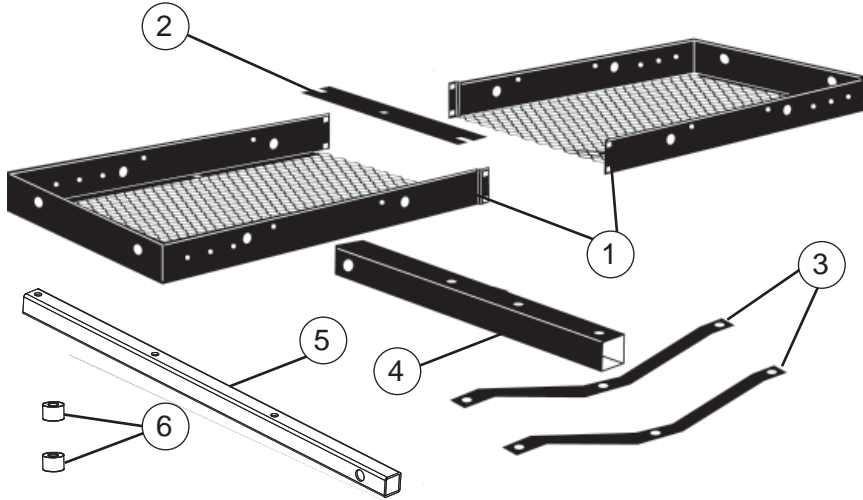

ITEM NO.	QUANTITY	DESCRIPTION
1	2	Platform Halves
2	1	Tie Plate
3	2	Support Bridges
4	1	Receiver Bar - 2"
5	1	Receiver Bar - 1.25"
6	2	Bushings

**HARDWARE LIST**

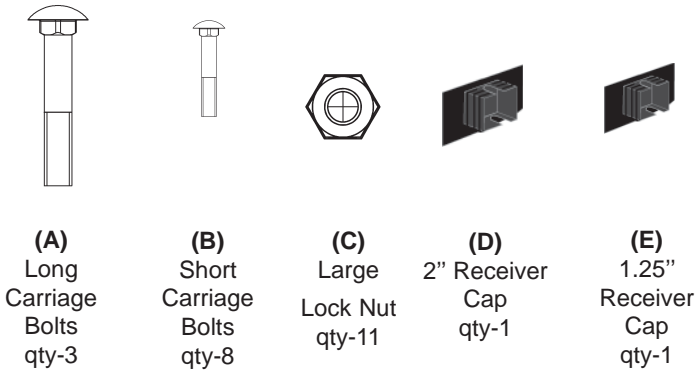

**LIMITED WARRANTY**

MASTERBUILT Mfg., Inc. warrants all parts of this HITCH-HAUL® Cargo Carrier product to be free from defects in material and workmanship for 90 days from date of purchase. Within this period, MASTERBUILT Mfg., Inc. shall correct any defect by repairing or replacing defective parts of the equipment, or making available parts thereof, FOB Columbus, GA.

MASTERBUILT Mfg., Inc. shall not be obligated to repair or replace equipment which has been repaired by others, abused, altered or misused. We further state that we shall not be held liable for any losses due to neglectful use on the part of the operator. Upon expiration of such warranty, all liability shall terminate. No other warranties are expressed or implied.

**NOTE:** Paint finish will scratch and chip under normal use, and therefore carries no warranty.

**COMPLETE & RETURN TO**

**ATTN: WARRANTY REGISTRATION**

Masterbuilt Manufacturing, Inc.

1 Masterbuilt Court • Columbus, GA 31907

Name: \_\_\_\_\_

Address: \_\_\_\_\_


City, State/Province, Postal Code: \_\_\_\_\_

Phone Number: \_\_\_\_\_ E-Mail Address: \_\_\_\_\_

Model Number: \_\_\_\_\_ Serial Number: \_\_\_\_\_

Purchase Date: \_\_\_\_\_ Place of Purchase: \_\_\_\_\_

## VEHICLE ASSEMBLY

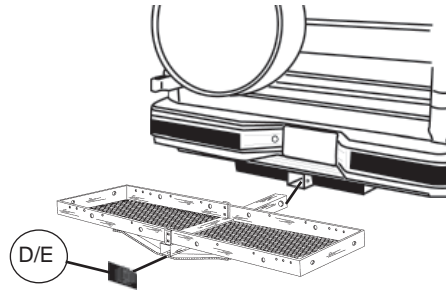

### STEP 4.

**Note:** Clevis pin and receiver hitch not included. Install platform to your vehicle by sliding receiver tube into vehicle receiver hitch. Clevis pin must slide through receiver hitch and receiver tube hole at the same time to secure Hitch-Haul properly. Place safety clip through clevis pin.

### STEP 4a.

Align plastic receiver cap (D/E)\* with open end of receiver bar that faces away from vehicle. With even pressure, press cap into opening.

\*Receiver cap (D) is for the 2" receiver bar.  
Receiver cap (E) is for the 1.25" receiver bar.

### IMPORTANT NOTICE:

If exhaust fumes blow directly onto cargo carrier, position load away from exhaust. An extension or lift kit may be required to do so. Call 1-800-489-1581 or visit us at [www.masterbuilt.com](http://www.masterbuilt.com).




## REPLACEMENT PARTS LIST

ITEM NO.	DESCRIPTION
990050033	Platform Half Kit
990050034	Tie Plate Kit
990050035	Bridge Support Kit
990050037	2" Receiver Bar
990050038	1.25" Receiver Bar
952050005	2" Receiver Cap
9014090004	1.25" Receiver Cap
9911100007	Bushings Kit
998050011	Hardware Bag
9011090003	Instruction Manual

**STOP!**  
DO NOT RETURN TO RETAILER  
For Assembly Assistance, Missing or Damaged Parts  
Call: MASTERBUILT Customer Service at 1-800-489-1581

## ASSEMBLY INSTRUCTIONS

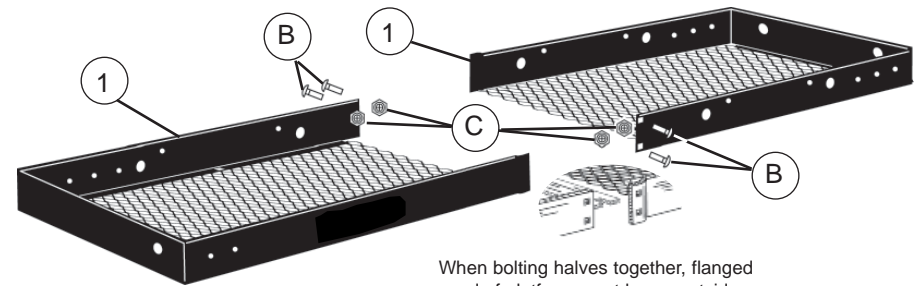


### PLATFORM ASSEMBLY

### STEP 1.

**Note:** Do not tighten bolts until STEP 3.

Bring both halves of the platform (1) together. Align platform angle side holes and connect with a short carriage bolt (B) and lock nut (C).


### FOR 2" RECEIVER ASSEMBLY

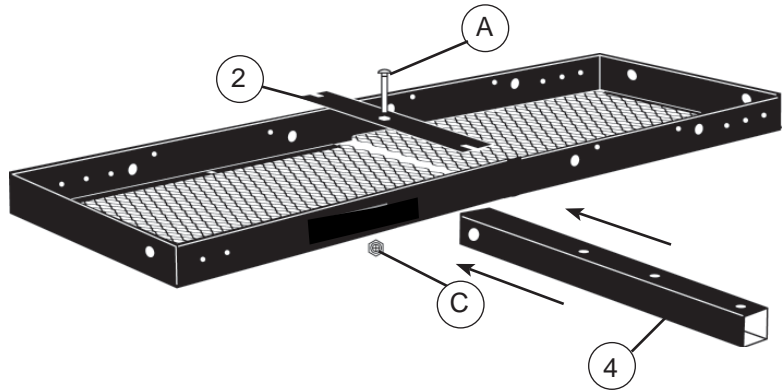

#### **STEP 2.**


Place tie plate (2) in the middle top of the platform, aligning the holes with the platform. Take the long carriage bolt (A) and put it through center hole of tie plate. Add 2" receiver bar tube (4), place carriage bolt (A) through center hole and secure with lock nut (C).

### FOR 1 1/4" RECEIVER ASSEMBLY

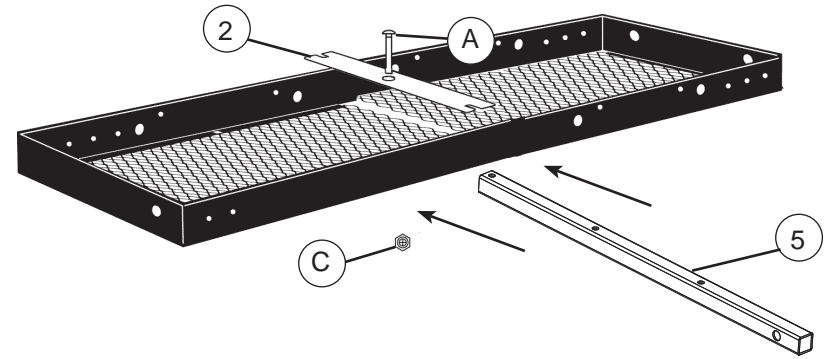

#### **STEP 2.**


Place tie plate (2) in the middle top of the platform aligning the holes with the platform. Take the long carriage bolt (A) and put it through center hole of tie plate into 1 1/4" receiver (5). Next, secure using carriage bolt (A) with locking nut (C).

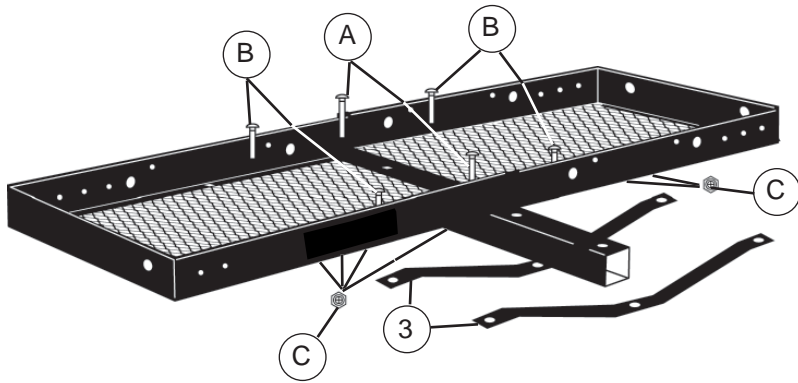

#### **STEP 3.**

Place long carriage bolts (A) on each end of tie plate and receiver bar tube. Place bridge support (3) on each outer carriage bolt and secure with lock nut (C). Each end of bridge support will then be mounted to platform using remaining four short carriage bolts (B) and lock nuts (C).

**Tighten all bolts and nuts at this time.**

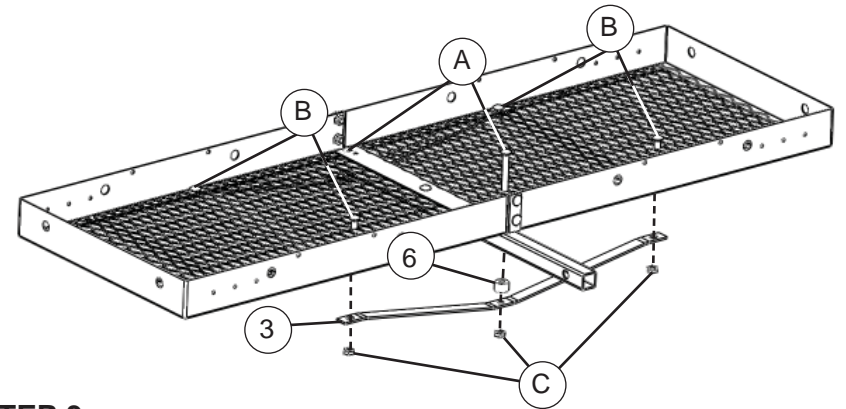

#### **STEP 3.**

Place long carriage bolts (A) on each end of tie plate and receiver bar tube. Position bushings (6) on center hole of bridge support (3) as shown. Place bridge support (3) on each outer carriage bolt and secure with lock nut (C). Each end of bridge support will then be mounted to platform using remaining four short carriage bolts (B) and lock nuts (C).

**Tighten all bolts and nuts at this time.**