

WALLPACK LIGHT

SPEC SHEET



Suitable for
Wet Locations



Catalog No. : STL15-4K-BZ

Type : Wallpack Light

Project Name :

Location :

Qty :

Date :

This versatile wall pack provides a sleek, discrete, and low-profile design to beautifully compliment both commercial and residential applications. It's zero-uplight forward throw light distribution directs light where it's needed without emitting wasteful and eye-soring glare. No maintenance, high efficiency LEDs results in large energy and cost savings over traditional HID wallpacks.

APPLICATIONS

Suitable for outdoor applications in residential, commercial, apartment, retail, and industrial uses on driveways, building perimeters, loading bays, over-doors, and entry-ways.

PRODUCT PERFORMANCE AT A GLANCE

SYSTEM WATTAGE	LED WATTAGE	LUMENS	LPW	CRI	REPLACES (MH)
15W	14W	1645 lm	109 lm/w	≥82	35W

HOUSING

High-grade die-cast aluminum housing with UV-stabilized polycarbonate lens mounted with stainless steel hardware.

OPTICS

Direct LED distribution with white reflective light distribution refractor. Optical system is designed for zero uplight. Light engine is weather protected with silicone sealed clear glass for maximum light output.

FINISH

Fade, weather, and abrasion resistant, electrostatically applied, thermally cured, triglycidic isocyanurate (TGIC) textured polyester powdercoat finish. Paint is dark bronze.

IP RATING & LISTINGS

LED light engine is weather proof rated IP65.

DLC, cULus, FCC Certified

MOUNTING

Easy knock-outs on back box with built-in leveling bubble allows mounting to any standard 3 1/2" to 4" square and octagonal or 4 inch round electrical junction boxes.


Can also be flush mounted to any surface and wired via conduit entries.

Can be mounted in upward or downward orientation.

WARRANTY


Fixture is covered by a 5-year limited warranty. See probrite.com/warranty for details.

PRODUCT LINE DRAWING

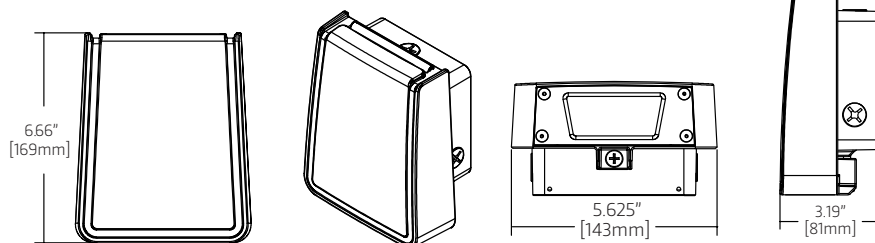


SUGGESTED MOUNTING HEIGHT:
6-12FT.(1.8-3.7M)

3D PHOTOMETRIC VIEW

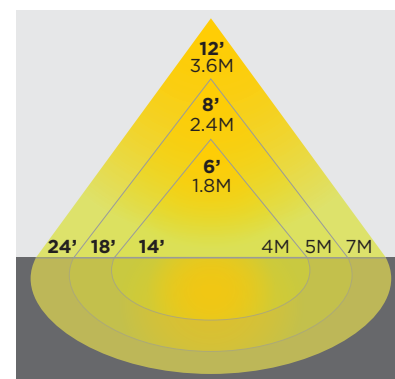


PRODUCT SPECIFICATIONS

Product Dimensions	: 6.66"×5.625"×3.19
Weight	: 3.31lbs
Lumens	: 1645
System Wattage	: 15W
LED Wattage	: 14W
Efficacy	: 109
CRI	: 82
Replaces (MH)	: 35W
Mounting	: Wall mount
Frequency	: 50-60Hz
THD (Total Harmonic Distortion)	: <20%
PF (Power Factor)	: >0.9
Ambient Operating Temperature	: (-30) - 40°C
Input Voltage	: 120-277V
LED Chip	: HL-AT-2835FVW-S1-08-PCT-HR3
Photocell	: No
Driver	: 0-10V Dimming
Standard Lifetime	: L70 >50,000hrs
Standard Warranty	: 5 Years
Water Proofing Grade	: IP66
CCT	: 4000K
Certifications	: DLC, UL/cUL

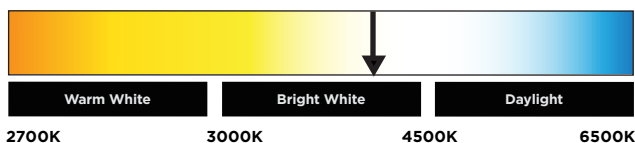

2D PHOTOMETRIC VIEW

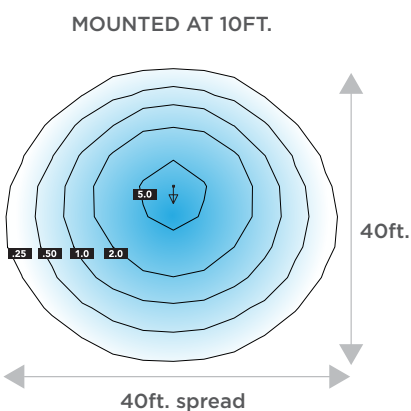

APPLICATION

