



Installation Instructions

Double Sided Pulls for Glass or Wood Doors

Double Sided pull includes Screw inserts for Glass doors. Screw dowels for glass can accommodate glass thickness ranging from 3/8" up to 1".

If needed for wood doors, Screw dowels can be changed to accommodate wood doors ranging from 1-3/8" up to 1-3/4" thick.


Included in Kit



SCREWS FOR WOOD DOORS AND ALLEN KEY



To Fasten, use Allen Key to tighten the Set Screw.

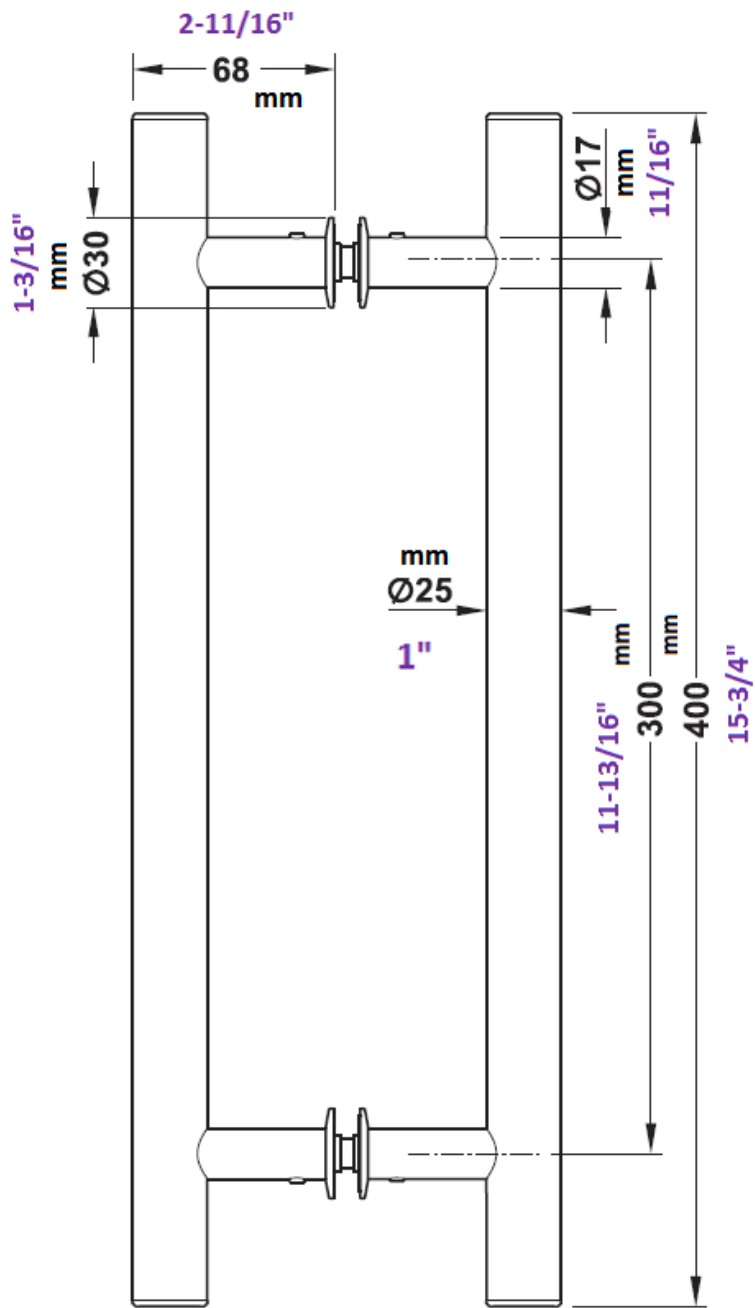

Drill hole Ø 13 mm
 1/2"