

D-LUX™


PRO SOUND

UNDERLAYMENT AND CRACK ISOLATION MEMBRANE

HOMELUX®
TILE ACCESSORIES

PROTECT

Moisture protection up to 5 lbs. MVER

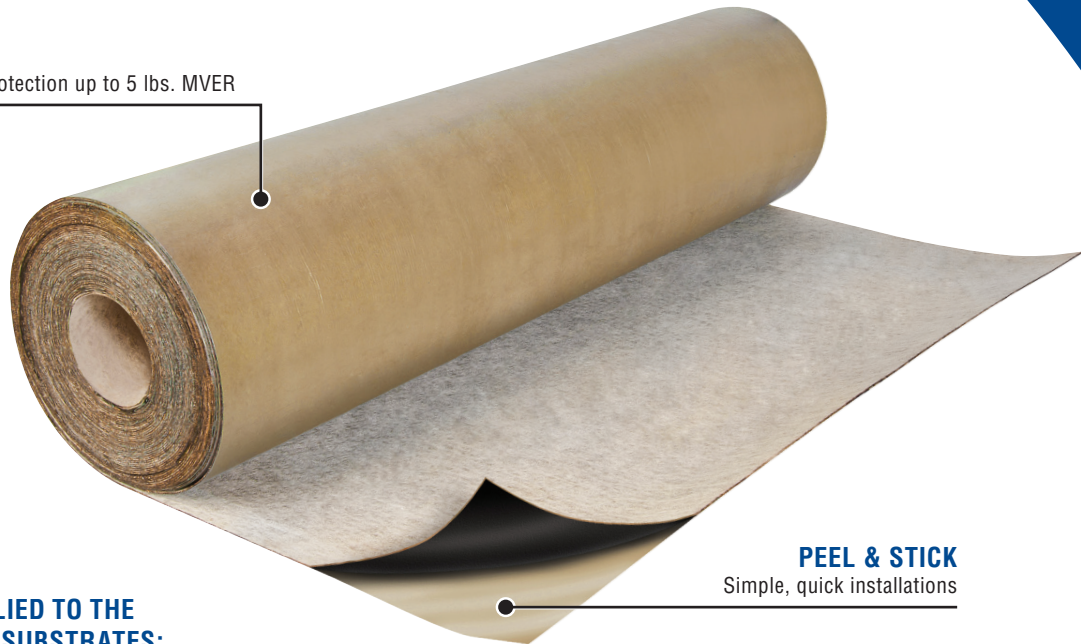

PEEL & STICK

Simple, quick installations

CAN BE APPLIED TO THE FOLLOWING SUBSTRATES:

- Concrete Slabs
- Plywood
- OSB
- Ceramic Tile
- Terrazzo, Marble, Slate & Stone
- Pre-cast Floor Panels
- Radiant Heat Floors
- VCT, VAT & Vinyl Floors
- Leveling & Patching Compounds

SPECIFICATIONS

ITEM NO.	HLPROSOUND
ROLL DIMENSIONS	3 ft. x 40 ft. (120 sq. ft.)
THICKNESS	130 mil (3.3mm)
WARRANTY	Limited 5 Year*
INSTALL WITH ROBERTS PRIMER	1331 Multipurpose Flooring Primer

*Visit our website for full warranty details: www.homeluxusa.com

D-LUX PRO SOUND is a Sound Control Underlayment and Crack Isolation Membrane. Its 130 mil internally reinforced Peel & Stick sheet membrane was designed specifically for thin set installations of ceramic, porcelain and natural stone tiles. This membrane underlayment provides moisture protection up to 5 lb. moisture vapor emission rate, and the added antimicrobials minimize mold and mildew growth.

Due to the very high natural/SBS rubber content and its exclusive non-woven poly propylene fabric construction, alkalinity in mortars are prevented from breaking down the system. This combination of materials also adds the strength to withstand horizontal structural movement and concrete shrinkage cracks (up to 3/8"), preventing the transfer of stress load to the tile which can lead to cracked and broken tiles.

Be Seamlessly Bold

www.HOMELUXUSA.com

U.S. Headquarters
866 435 8665

Canada
800 840 9422

Europe/Middle East
0031 24 6485348

Australia
011 61 3 9797 1888

New Zealand
64 9 415 9700

A0517