

Type of Appliance

- Temperature controlled, continuous flow, gas hot water system
- Certified for installation in manufactured (mobile) homes
- Forced combustion / Direct vent

Rinnai Model Number

REU-VC2025FFU-US

Operation / Installation

Forced combustion; indoor only

Minimum/Maximum Gas Rate (Input)

10,300 - 150,000 BTU/h (3.0-44.0 kWh)

Electrical

Appliance: AC 120 Volts - 60 Hz
 Controller: DC 12 Volts

Electrical Consumption

Normal: 76 w Standby: 2 w Anti-frost protection: 120 w

Amperage

Max: 4A Fuse: 10A

Ignition System

Direct electronic ignition

Hot Water Capacity

Minimum flow rate: 0.26 GPM (1 l/min)
 Minimum activation flow rate: 0.4 GPM (1.5 l/min)
 Maximum flow rate: 6.5 GPM (24.6 l/min)

Temperature

98° - 120° F (37° - 49° C) (factory default) Maximum temperature is selectable at 120° F(49° C) or at 140° F(60° C); 98° - 160° F(37° - 71° C) available with the MCC-91-2 controller for hydronic applications

Temperature (without remote)

120° F (49° C) (factory default) or 140° F (60° C)

Installation

Indoor only

Uniform Energy Factor (UEF)

0.81

Service Connections

Gas supply: 3/4 inch MNPT Cold water inlet: 3/4 inch MNPT
 Hot water outlet: 3/4 inch MNPT

Water Flow Control


Water flow sensor, electronic water control device and fixed by-pass

Minimum/Maximum Water Supply Pressure

20 - 150 PSI (138-1035 KPa) (recommended 30-80 PSI (209 - 552 KPa) for optimal performance)

Rinnai is continually updating and improving products; therefore, specifications are subject to change without prior notice. Local, state, provincial and federal codes must be adhered to prior to installation.

FLOW TABLE

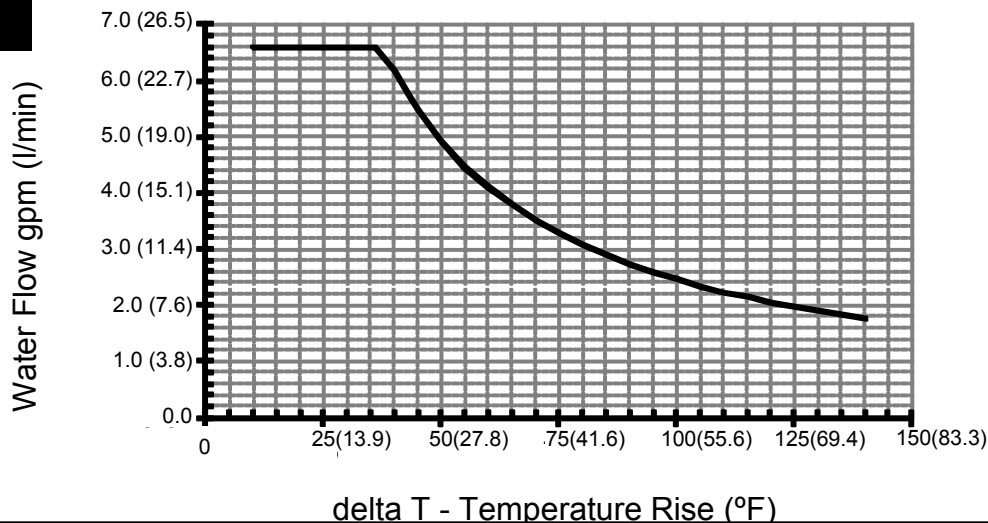

Water Temperature Control

Controller

Simulation feed forward and feedback

MC-91-2US (part of the front panel)
 Deluxe controller: MC-100V-1US (optional)
 Bathroom controller: BC-100V-1US (optional)
 MCC-91-2US (optional; for hydronic applications)

Controller Cable

Non-polarized two-core cable, minimum 22 AWG

Safety Devices

- Flame failure - Flame Rod
- Boiling protection
- Combustion fan rpm check
- Over current - glass fuse
- Remaining flame (OHS)
- Thermal fuse
- Automatic frost protection

Clearances from Combustibles (suitable for closet, attic, and crawl space installations)

- Top of heater - 6 inches(152mm)
- Front of heater - 6 inches(152mm)*
- Sides of heater - 2 inches(51mm)
- Back of heater - 0 inches
- Ground / bottom - 12 inches(305mm)
- From vent pipe - 0 inches

Clearances from Non-combustibles * 24 inches required for serviceability

- Top of heater - 2 inches(51mm)
- Front of heater - 6 inches(152mm)*
- Sides of heater - 1/2 inch(13mm)
- Back of heater - 0 inches
- Ground / bottom - 12 inches(305mm)
- From vent pipe - 0 inches

Min. / Max. Gas Supply Pressure

Natural Gas: min 4" W.C. (10mbar) max 10.5" W.C. (26.1mbar)
 Propane Gas: min 8" W.C. (20mbar) max 13.5" W.C. (33.6mbar)

Manifold Gas Pressure (inches W.C.)

Natural Gas: high fire 1.8" W.C. (4.5mbar) low fire 0.61" W.C. (1.5mbar)
 Propane Gas: high fire 2.8" W.C. (7.0mbar) low fire 0.87" W.C. (2.2mbar)

NOx

Complies with South Coast Air Quality Management District 14 ng/J or 20 ppm NOx emission levels

Warranty Heat exchanger: 10 years* for residential and hydronic applications, increased to 12 years* if installed with an isolation valve kit; All other parts: 5 years*; Labor: 1 year
 (* reduced to 3 years if used as a circulating water heater within a circulation loop, when the water heater is in series with a circulation system and all circulating water flows through the water heater)

DIMENSIONS

WEIGHT: 45.6 lb (20.7 kg)

| DIMENSION | Inches (mm) | DIMENSION | Inches (mm) |
|-----------------|--------------|-----------|-------------|
| A (GAS) | 1.31 (33.2) | D | 4.33 (110) |
| A (COLD) | 1.93 (49) | E | 2.89 (73.3) |
| A (HOT) | 1.35 (34.4) | F | 1.85 (47) |
| B | 4.21 (106.9) | G | 3.44 (87.3) |
| C | 1.17 (29.8) | | |