

Location:




# Identity<sup>™</sup>

S-6700TS  
Tub/Shower System  
**Specification Submittal**



Model Numbers	Specification
<input type="checkbox"/> <b>S-6700TS</b> <i>Identity Tub/Shower System</i>	<p>Tub/shower system powered by the Temptrol<sup>®</sup> pressure-balancing valve with integrated diverter. Valve body includes adjustable stop screw to limit handle turn. Components made from metal and nonmetallic materials, plated in standard polished chrome finish.</p> <div style="display: flex; align-items: center;"> </div>
<b>Modifications</b>	
<ul style="list-style-type: none"> <li><input type="checkbox"/> <b>-CHKS</b>     <i>Integral check stops - for use in installations where a positive shut-off device is used downstream of mixing valve</i></li> <li><input type="checkbox"/> <b>-IPS</b>        <i>1/2" female IPS connections</i></li> <li><input type="checkbox"/> <b>-LP</b>          <i>Loop handle</i></li> <li><input type="checkbox"/> <b>-LR</b>          <i>Lever handle</i></li> <li><input type="checkbox"/> <b>-OP</b>          <i>13" oval plate</i></li> <li><input type="checkbox"/> <b>-REB-TRM</b>   <i>Rebuild trim kit</i></li> <li><input type="checkbox"/> <b>-REV</b>         <i>Reverse coring, hot on right, cold on left, for back to back installations</i></li> <li><input type="checkbox"/> <b>-STN</b>         <i>Satin Nickel finish</i></li> <li><input type="checkbox"/> <b>-TRM</b>         <i>Trim only, valve not included</i></li> <li><input type="checkbox"/> <b>-X</b>            <i>Integral service stops - allows water shutoff at valve for service</i></li> </ul>	<b>Compliance</b> -ASME A112.18.1/CSA B125.1 <div style="text-align: right;"> </div>
<p><b>Note:</b> Append appropriate -suffix to model number.</p>	<b>Warranty</b> <p><b>Limited Lifetime</b> - to the original end purchaser in consumer/residential installations.  <b>5 Years</b> - for industrial/commercial installations.            Refer to <a href="http://www.symmons.com/warranty">www.symmons.com/warranty</a> for complete warranty information.</p>

## Dimensions

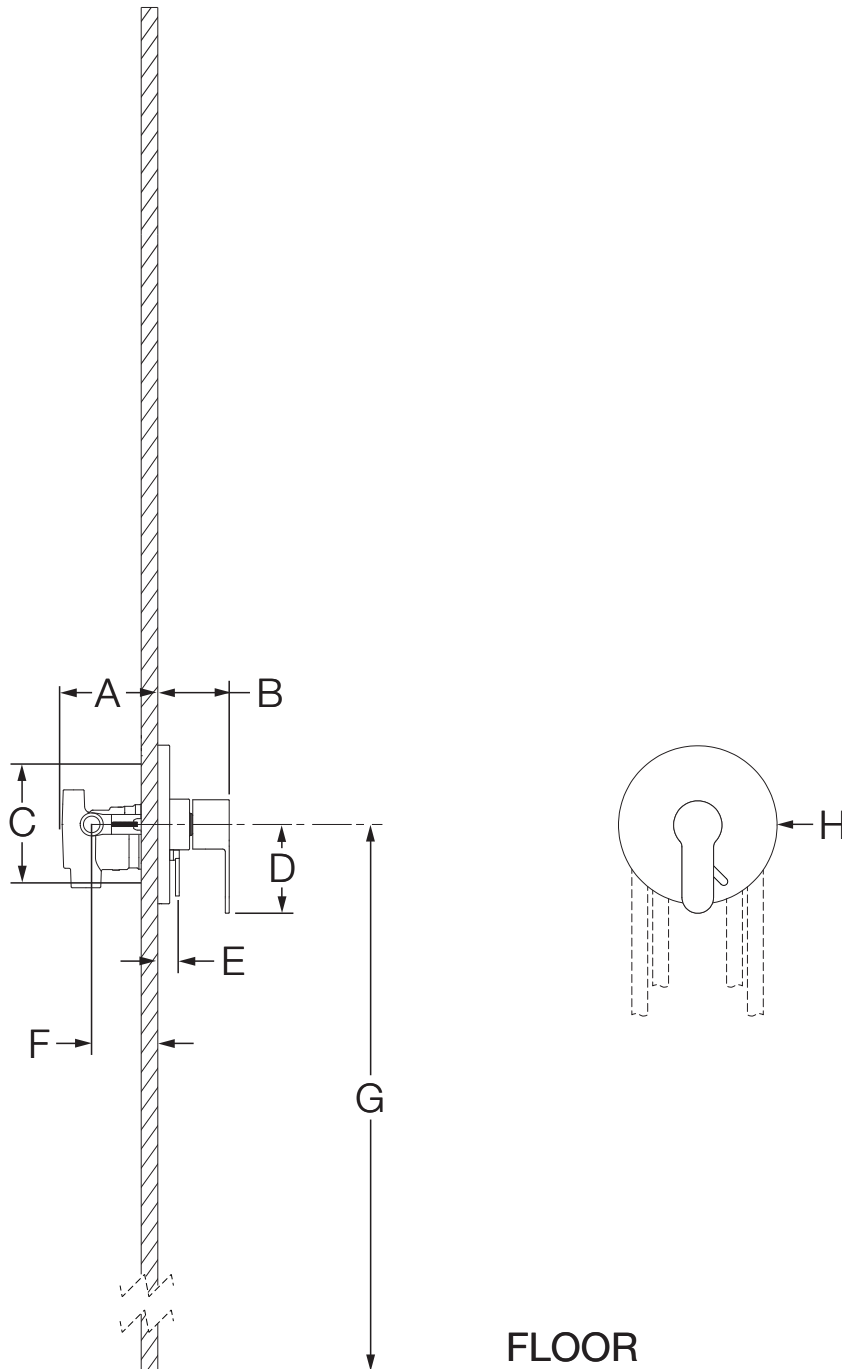

Measurements	
A	3-1/2", 89 mm
B	2-7/8", 73 mm
C	Shower Valve Hole Size Min. Ø 3", 76 mm Max. Ø 4", 102 mm
D	3-1/2", 89 mm
E	7/8", 22 mm
F	Rough-in 2-3/8" ± 1/2", 60 mm ± 13 mm
G	Ref. 32", 813 mm
H	Ø 6-3/8", 162 mm

### Notes:

- 1) All dimensions measured from nominal rough-in (see F as reference).
- 2) Dimensions subject to change without notice.